

### THE PICCOLO FIXTURE

The Piccolo is a special micro fixture that stands just 0.23 in. (5.91 mm) high and 0.2 in. (5 mm) wide. The Piccolo uses a flat milky lens to create pinpoint lines of light in tight spaces such as custom millwork. It is sold in custom sizes ranging from 2.04 in. (51.7 mm) to 6 ft. 5.75 in. (1974.7 mm) long in increments of 1.52 in. (38.46 mm). The Piccolo features a special IP20 micro RibbonLyte that provides 90+ CRI in six available CCTs ranging from 2200K to 4000K.

- 3.0 W/ft (9.8 W/m)
- 0.2 in. (5 mm) wide by 0.23 in. (5.91 mm) high
- Fixture includes secure VHB tape backing
- Smallest fixture at 2.04 in. (51.7 mm) including end caps
- Sold in 1.52 in. (38.46 mm) increments up to 6 ft 5.75 in. (1974.7 mm)
- 110-degree beam angle
- Flat milky lens
- 55 LEDs/ft (182 LEDs/m)
- 90+ CRI
- IP20 rating for indoor use



### HOUSING FINISHES




Silver Standard    Black\*    Custom RAL\*

\* Consult factory. Additional fee and MOQ apply.


### AVAILABLE LENS FINISHES




Milky Lens  
63% Light Transmission

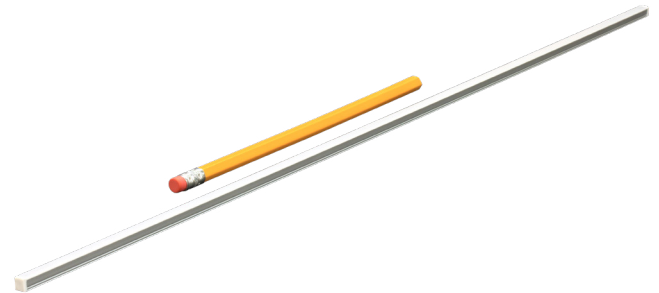

### AVAILABLE COLOR TEMPERATURES



### DIMENSIONS

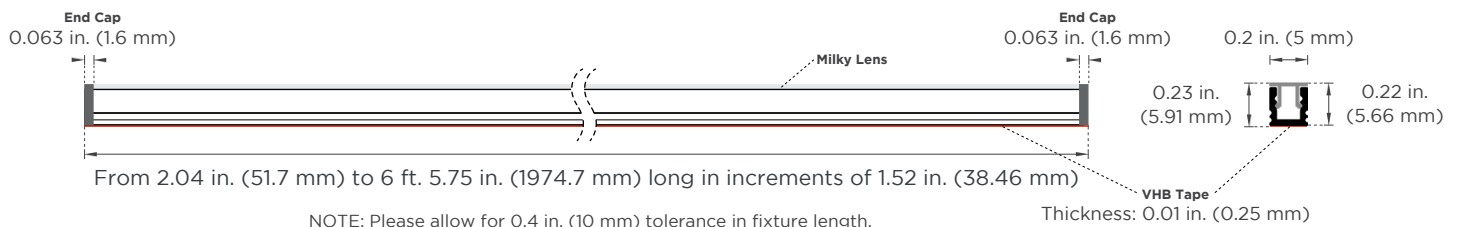

### ORDERING GUIDE

Model	Wattage	Color Temp.	LENS	HOUSING COLOR
PIC	3.0		M	
PIC - The Piccolo Fixture	3.0 - 3.0 W/ft (9.8 W/m)	22 - 2200K    30 - 3000K 24 - 2400K    35 - 3500K 27 - 2700K    40 - 4000K	M - Milky Lens	SV - Silver (default) BK - Black  Consult factory for custom colors. Additional fee and MOQ apply.

**NOTE:** The Piccolo is sold as a complete custom fixture. Cutting a Piccolo fixture in the field will void the warranty.


**SPECIFICATIONS**

<b>Beam Angle</b>	110°
<b>Lens Type</b>	Milky Lens
<b>Length</b>	Smallest fixture at 2.04 in. (51.7 mm) including end caps. Sold in 1.52 in. (38.46 mm) increments up to 6 ft 5.75 in. (1974.7 mm). Please allow for 0.4 in. (10 mm) tolerance in fixture length. (See dimension drawing at bottom of page 1 for reference.)
<b>Operating Voltage</b>	24 V
<b>Dimming</b>	MLV / 0-10 Volt / ELV / DALI / DMX
<b>Operating Temperature</b>	-40 – 158 °F (-40 – 70 °C)
<b>Colors</b>	2200K, 2400K, 2700K, 3000K, 3500K, 4000K
<b>CRI</b>	90+ CRI
<b>Power Feed Option</b>	End feed
<b>Lamp Life</b>	L70 at 50,000 hours
<b>MacAdam ellipse (SDCM)</b>	2-Step Binning (For Static White LEDs only)
<b>Certifications</b>	UL Listed UL 2108 Issued: 2004/02/27 Ed: 1 Rev: 2014/02/24 Low Voltage Lighting Systems CSA C22.2#9.0 Issued: 1996/06/01 Ed: 1 (R2011) General Requirements for Luminaries; with Gen. Inst. 1: 1997, Gen Inst. 2: 1998. ROHS compliant

**RIBBONLYTE SPECIFICATIONS**

Cuttible Length	LED Pitch	Color Temperature	lm/W without Lens	Delivered Lumens with Milky Lens	Max Length
1.52 in. (38.46 mm)	55 LEDs/ft (182 LEDs/m)	<b>2200K</b>	72	136 lm/ft (447 lm/m)	6 ft 7 in. (2 m)
		<b>2400K</b>	77	146 m/ft (477 lm/m)	
		<b>2700K</b>	81	153 lm/ft (501 lm/m)	
		<b>3000K</b>	84	159 lm/ft (522 lm/m)	
		<b>3500K</b>	87	164 lm/ft (537 lm/m)	
		<b>4000K</b>	92	175 lm/ft (572 lm/m)	

**NOTE:** The Piccolo is sold as a complete custom fixture. Cutting a Piccolo fixture in the field will void the warranty.

24V DIMENSIONS	Top View	Side View	Dimensions
IP20	 <p>CUTTIBLE EVERY: 1.52 in (38.5 mm)</p>		<p><b>Width</b> 0.2 in (3 mm)  <b>Max Length</b> 6 ft 7 in. (2 m)  <b>Height</b> 0.06 in (1.45 mm)</p>

Acolyte does not warrant or represent that the information is free from errors or omission. The information may change without notice and Acolyte is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

AVAILABLE DRIVERS OPTIONS / WIRE GAUGE CHART

NON-DIMMING ELECTRONIC DRIVERS		ELV & MLV DRIVERS		DIMMABLE DALI DRIVERS	
					
<p><b>30W, 60W, 96W Non-Dimming Electronic Class 2 Drivers</b></p> <p>Part No.:</p> <ul style="list-style-type: none"> <li>• DRVW2430 (30 Watt)</li> <li>• DRVW2460 (60 Watt)</li> <li>• DRVW2496 (96 Watt)</li> </ul> <p>Output Voltage: 24 VDC Input Voltage: 120-277 VAC IP65, dry/damp location UL Listed</p>	<p><b>240W, 320W Non-Dimming Electronic Drivers</b></p> <p>Part No.:</p> <ul style="list-style-type: none"> <li>• DRVW24240 (240 Watt)</li> <li>• DRVW24320 (320 Watt)</li> </ul> <p>Output Voltage: 24 VDC Input Voltage: 90-305 VAC IP65, dry/damp location UL Recognized</p>	<p><b>60W, 96W Non-Dimming Compact Drivers</b></p> <p>Part No.:</p> <ul style="list-style-type: none"> <li>• DRV2460C (60 Watt)</li> <li>• DRV2496C (96 Watt)</li> </ul> <p>Output Voltage: 24 VDC Input Voltage: 120-277 VAC IP20, dry location UL Class P</p>	<p><b>60W, 96W, 150W, 300W ELV/MLV Dimmable Drivers</b></p> <p>Part No.:</p> <ul style="list-style-type: none"> <li>• DRVW2460ELVMLV (60 Watt)</li> <li>• DRVW2496ELVMLV (96 Watt)</li> <li>• DRVW24150ELVMLV (150 Watt)</li> <li>• DRVW24300ELVMLV (300 Watt)</li> </ul> <p>Line Voltage Dimmable Drivers Output Voltage: 24 VDC Input Voltage: 100-277 VAC IP67, damp/wet location UL, CE, and CSA Listed</p>	<p><b>100W 1 Channel, 100W 2 Channel, 150W 4 Channel Dimmable DALI Drivers</b></p> <p>Part No.:</p> <ul style="list-style-type: none"> <li>• DRV100DALI1CH (100W 1 channel)</li> <li>• DRV100DALI2CH (100W 2 channel)</li> <li>• DRV150DALI4CH (150W 4 channel)</li> </ul> <p>Output Voltage: 24 VDC Input Voltage: 120-277 VAC IP20, dry location CE, UL Recognized, FCC, RoHS, SELV</p>	
0-10V DRIVERS		ATHENA WIRELESS COMPATIBLE		DIMMABLE DALI-2 DRIVERS	
					
<p><b>0-10V Dimmable Waterproof Drivers</b></p> <ul style="list-style-type: none"> <li>• Part No.: DRVW249610P (96 Watt)</li> <li>• Part No.: DRVW2428810P (288 Watt)</li> </ul> <p>Output Voltage: 24 VDC (+/- 0.5 V) Input Voltage: 100-277 VAC UL wet location UL Listed</p>	<p><b>0-10V Dimmable 90W VW/WD Driver</b></p> <ul style="list-style-type: none"> <li>• Part No.: DRVRFWDVW2490120</li> </ul> <p>Output Voltage: 24 VDC Input Voltage: 100-277 VAC IP23, dry/damp location UL Listed</p>	<p><b>94W Athena Wireless Compatible Drivers</b></p> <ul style="list-style-type: none"> <li>• Part No.: DRVW2494ATH1CH (1 channel)</li> <li>• Part No.: DRVW2494ATH2CH (2 channel)</li> </ul> <p>Output Voltage: 24 VDC Input Voltage: 100-277 VAC Dry location UL Listed</p>	<p><b>96W DIMMABLE DALI-2 DT6 D4I &amp; DALI-2 DT8 D4I DRIVERS</b></p> <ul style="list-style-type: none"> <li>• Part No.: DRVW2496DALI1CH (1 channel)</li> <li>• Part No.: DRVW2496DALI2CH (2 channel)</li> </ul> <p>Output Voltage: 24-26 VDC Input Voltage: 120-277 VAC IP67, wet location UL Listed</p>		

DRIVER AND RIBBONLYTE AT FULL LOAD


Wattages	30		60		96		150		200		240		300		320	
	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters
24 AWG / 0.25 mm <sup>2</sup>	14	4.27	9	2.74	5.5	1.68	3.75	1.14	2.75	0.84	2.25	0.69	1.75	0.53	1.75	0.53
22 AWG / 0.34 mm <sup>2</sup>	22	6.71	14	4.27	9	2.74	5.75	1.75	4.5	1.37	3.5	1.07	2.75	0.84	2.75	0.84
20 AWG / 0.5 mm <sup>2</sup>	35	10.67	23	7.01	14	4.27	9	2.74	7	2.13	5.75	1.75	4.5	1.37	4.25	1.30
18 AWG / 0.75 mm <sup>2</sup>	56	17.07	37	11.28	23	7.01	15	4.57	11	3.35	9	2.74	7.5	2.29	7	2.13
16 AWG / 1.5 mm <sup>2</sup>	90	27.44	60	18.29	37	11.28	24	7.32	18	5.49	15	4.57	12	3.66	11	3.35
14 AWG / 2.5 mm <sup>2</sup>	142	43.29	95	28.96	59	17.99	38	11.59	28	8.54	23	7.01	19	5.79	17	5.18
12 AWG / 4 mm <sup>2</sup>	226	68.90	151	46.04	94	28.66	60	18.29	45	13.72	37	11.28	30	9.15	28	8.54
10 AWG / 6 mm <sup>2</sup>	360	109.76	240	73.17	150	45.73	96	29.27	72	21.95	60	18.29	48	14.63	45	13.72
8 AWG / 10 mm <sup>2</sup>	574	175.00	381	116.16	239	72.87	153	46.65	115	35.06	95	28.96	76	23.17	71	21.65

WIRING DIAGRAMS


WIRE COLORS PER RIBBONLYTE COLOR

**STATIC WHITE**  
Red Wire (+) Positive  
Black Wire (-) Negative


0-10 V

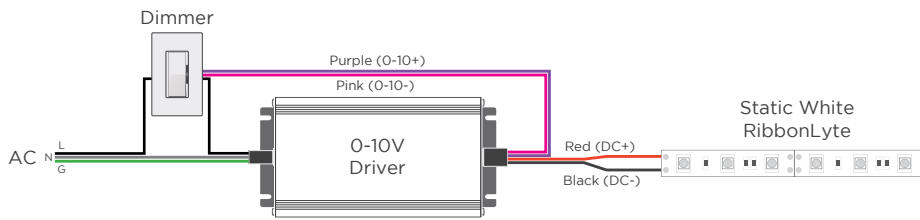


MLV / ELV

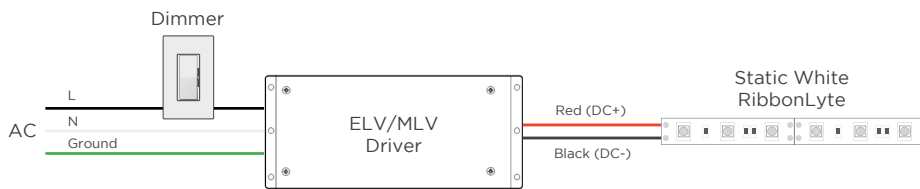


DMX WIRING WITH STATIC WHITE RIBBONLYTE

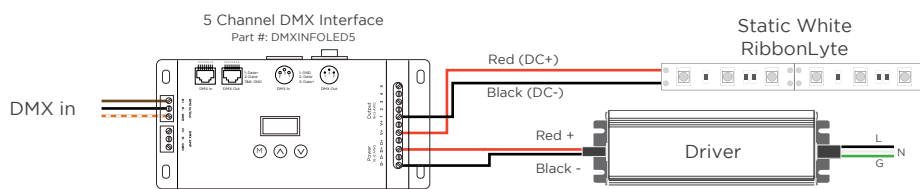

DALI-2 WIRING WITH STATIC WHITE RIBBONLYTE

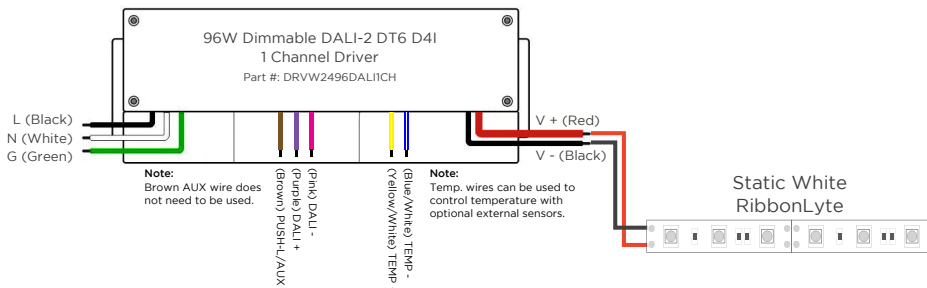

STATIC WHITE RIBBONLYTE WIRING WITH ATHENA WIRELESS COMPATIBLE DRIVER

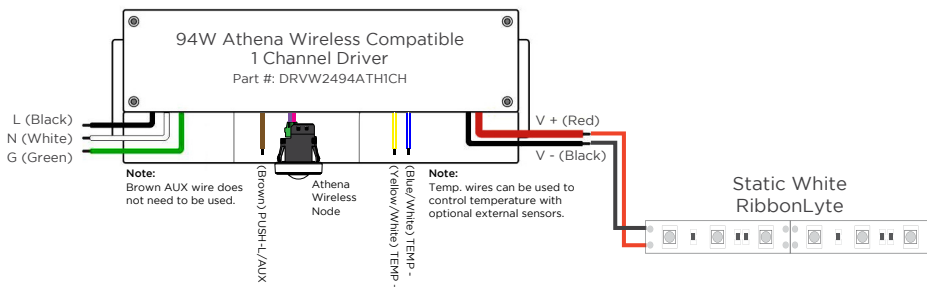

REV.02DEC2024

**GLOBAL HQ**

320 Murray Hill Pkwy  
East Rutherford, NJ 07073  
U.S.  
T: (+1) 212 629 6830  
E: Sales-US@GENLEDBrands.com

**EUROPEAN HQ**

Hogeweyselaan 119  
1382 JK Weesp  
Netherlands  
T: (+31) 346 235 000  
E: SalesEurope@GENLEDBrands.com

**MEINA HQ**

PO Box 371378, #823, Building 4EA  
Dubai Airport Free Zone  
Dubai, UAE  
T: (+971) 4 701 7901  
E: SalesMEINA@genledbrands.com

**ASIA-PACIFIC HQ**

Room 402, Building D  
Shenshi Tongchuang Science and Technology Park  
No. 16 Hongyin Road  
Xingqiang Community, Xinhui Street  
Guangming District, Shenzhen, China 518107  
Sales: (+86) 139 1836 3905  
Office: (+86) 755 8529 0710  
E: Sales-Pacific@GENLEDBrands.com