

## 12.0 STATIC WHITE DOUBLE ROW RIBBONLYTE

This LED tape is twice as nice! Static White Double Row RibbonLyte provides powerful 90+ CRI light output for our widest channels. Doubling the number of diodes helps light blend for superior dot-free solutions. Design custom channel fixtures with our aluminum extrusions and any of 9 dimmable Static White CCTs.


- Static White (1800K-6000K)
- 136 LEDs/ft (448 LEDs/m)
- 0.7 in. (17.9 mm) cut lengths
- IP20 for interior use
- Provides premium blending for consistent output

### Applications:

Commercial  
Entertainment  
Healthcare

Hospitality  
Museums  
Public Spaces

Residential  
Retail

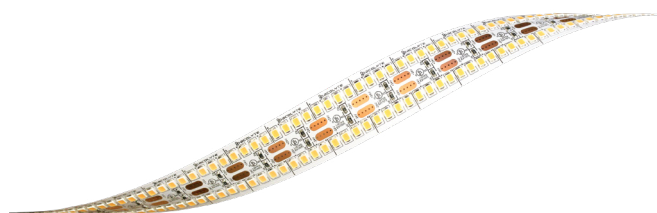

RoHS

IP20




**Declare.**

## ORDERING GUIDE

Category	CRI	Ribbon Type & IP Rating	Wattage & Color	
RB	90	SWDR20		
RB - RibbonLyte	90 - 90+ CRI Static White	SWDR20 - Static White Double Row IP20	12.018 - 12.0 W/ft 1800K	12.030 - 12.0 W/ft 3000K
			12.020 - 12.0 W/ft 2000K	12.035 - 12.0 W/ft 3500K
			12.022 - 12.0 W/ft 2200K	12.040 - 12.0 W/ft 4000K
			12.024 - 12.0 W/ft 2400K	12.060 - 12.0 W/ft 6000K
			12.027 - 12.0 W/ft 2700K	

## CONNECTION OPTIONS


### 1. End Feed Bare Wire Connection (Default Option)



### 2. IP67 Connector Input



### 3. Soldered Daisy Chain



### 4. Daisy Chain with IP67 Connectors




### 5. Bare Wire on Both Ends



### Standard cable length if not specified:



1. 12 in. cable with bare wire (custom length up to 20 feet)
2. Standard 12 in. cable with IP67 connectors (custom length up to 10 feet)
3. Daisy chain with 3 in. cable between runs (custom length up to 36 in.)
4. 3 in. cable between IP67 connector and RibbonLyte (custom length up to 18 in.)
5. Standard 12 in. cable with bare wire (custom length up to 10 feet)

## AVAILABLE COLOR TEMPERATURES



SPECIFICATIONS / DIAGRAM

12.0 STATIC WHITE DOUBLE ROW RIBBONLYTE									
Operating Voltage	24 V								
Power Consumption	12.0 W/ft (39.4 W/m)								
Current (mA)	500 mA/ft (1640 mA/m)								
LED Pitch	136 LEDs/ft (448 LEDs/m)								
Protection Rating	IP20								
Dimming/Control	MLV / 0-10 Volt / ELV / DALI								
Operating Temperature	-22 – 140 °F (-30 – 60 °C)								
Colors Temperatures	1800K	2000K	2200K	2400K	2700K	3000K	3500K	4000K	6000K
MacAdam ellipse (SDCM)	2-Step Binning								
Lumens	832.5 lm/ft (2731.4 lm/m)	982.9 lm/ft (3225 lm/m)	1073.2 lm/ft (3521.1 lm/m)	1103.3 lm/ft (3619.9 lm/m)	1243.7 lm/ft (4080.6 lm/m)	1344 lm/ft (4409.7 lm/m)	1354 lm/ft (4442.6 lm/m)	1344 lm/ft (4409.7 lm/m)	1303.9 lm/ft (4278 lm/m)
Binning Tolerance	+/- 100K								
LED Beam Angle	120°								
Lifetime (L70 reported)	50,000 hrs								
Cutable Length	0.7 in (17.9 mm)								
CRI - All Color Temp.	90+ CRI								
Lumens/Watt	69 lm/W	82 lm/W	89 lm/W	92 lm/W	104 lm/W	112 lm/W	113 lm/W	112 lm/W	109 lm/W
Constant Voltage	✓								
Certifications	UL 2108 Issued: 2016/06/17 Ed: 1 Rev: 2021/10/16 Low Voltage Lighting Systems. CSA C22.2 No. 250.0, General Requirements for Luminaires. ROHS compliant.								
Warranty	6 years								

24V DIMENSIONS	Top View	Side View	Dimensions
IP20	 <p>CUTTABLE EVERY: 0.7 in (17.9 mm)</p>		<p><b>Width</b> 0.94 in (24 mm)</p> <p><b>Max Length</b> 26 ft 3 in. (8 m)</p> <p><b>Height</b> 0.06 in (1.45 mm)</p>

OPTIONAL ACCESSORY

1 in. VHB Tape
----------------




Provides superior holding power in surface mounted applications  
Part Number: VHBTAPE1.OBK

Note: RibbonLyte comes with an adhesive backing, but Acolyte recommends using VHB Tape for extra support in surface mounted applications.


CHANNEL COMPATIBILITY / CHANNEL OPTIONS / USAGE GUIDELINES

CHANNEL	IP20	SURFACE CHANNELS		
AC1				
AC2				
AC3				
AC4				
AC5				
AR1				
AR3				
AS1				
AS2				
AS3				
AS6				
AS11				
AS16				
AS18				
AS20G				
AS22				
AS30	✓			
AS53	✓			
AT4				
AT5				
B1				
SC3				
WH35	✓			




**WH35**

W: 1.37 in. / 35 mm  
H: 1.47 in. / 37.5 mm  
Inside W: 1.23 in. / 31.2 mm



**AS30**

W/H: 1.31 in. / 33.4 mm  
H: 1.17 in. / 29.6 mm  
Inside W: 1.17 in. / 29.8 mm  
Inside H: 0.93 in. / 23.6 mm



**AS53**

W: 2.09 in. / 53 mm  
H: 2.09 in. / 53 mm  
Inside W: 1.32 in. / 33.6 mm  
Inside H: 2 in. / 51 mm


USAGE GUIDELINES

- IP65 and IP68 RibbonLyte cannot be cut in the field. All custom cuts and connections for these models must be performed at the factory to ensure waterproofing standards are met. Any modification of the waterproofing will result in a void warranty.
- When installing this product, consider the surface temperature of the material where it will be mounted. Many building surfaces which are exposed to direct sunlight exceed the 60 °C / 140 °F maximum for which our product is rated. High-risk locations like this should be avoided.
- IP20 RibbonLyte products are for indoor use in dry areas. IP65 RibbonLyte products can be used in indoor dry/damp locations such as bathrooms and kitchens. IP68 RibbonLyte products can be used in wet, outdoor locations around pools and spa tubs, but our products are not intended to be submerged in pools and fountains and do not carry UL676 certification to do so.
- Please refer to the RibbonLyte Proper Usage Guide in our Application Guide for more information. Available for download at [AcolyteLED.com](http://AcolyteLED.com).
- This product is compatible with a wide variety of control products including the entire line of Lutron dimming systems.
- For use with Acolyte drivers, 0-10V dimming modules and interface controllers (DMXINF models).
- Use with non-Acolyte supplied drivers is not supported or warranted.
- Due to the nature of RibbonLyte products, cuttable lengths are generally longer or shorter than the customer requested length. Unless specified, RibbonLyte is factory cut at the shorter cuttable point.
- We reserve the right to make changes to product lineup, specifications, design and finishes at any time without notice.


Acolyte does not warrant or represent that the information is free from errors or omission. The information may change without notice and Acolyte is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

## WIRING DIAGRAMS


### 0-10V

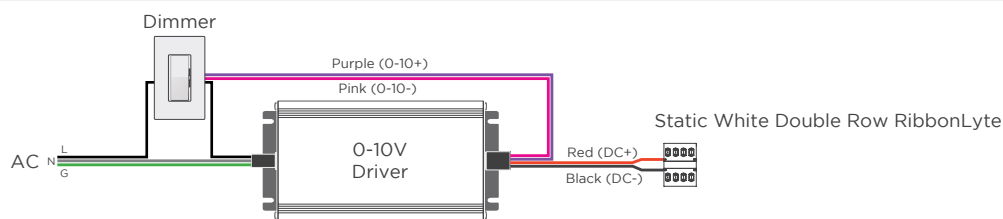

### MLV / ELV

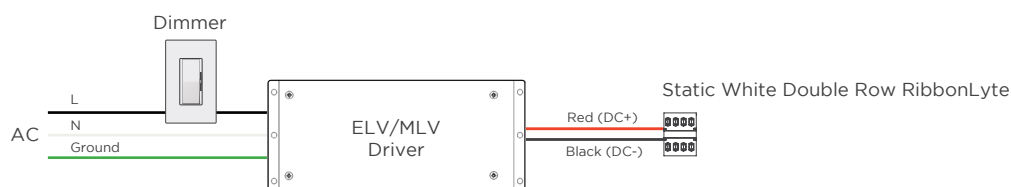

### DMX

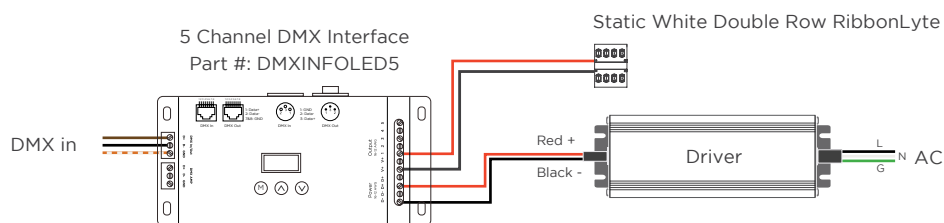

### WIRE COLORS PER RIBBONLYTE COLOR

#### STATIC WHITE DOUBLE ROW RIBBONLYTE

Red Wire (+) Positive  
Black Wire (-) Negative

## ACTUAL POWER CONSUMPTION

Length (ft)	Length (m)	Actual Power Consumed (W)	Average Wattage (W/ft)	Average Wattage (W/m)	Actual Current Drawn (A)
5	1.52	58.54	11.71	38.40	2.439
10	3.05	113.08	11.31	37.09	4.712
15	4.57	159.69	10.65	34.92	6.654
20	6.10	194.82	9.74	31.95	8.118
25	7.62	216.85	8.67	28.45	9.035
26.25	8.00	220.87	8.41	27.60	9.203

**NOTE:** Quotes use nominal values. We highly recommend using nominal wattages for all customer calculations. Allow for a 15% buffer (10% driver, 5% fixture) in these calculations as performance may vary. Acolyte is not liable for product performance if these tables are used instead of nominal values when orders are placed.

REV.14 JUL2025

#### GLOBAL HQ

320 Murray Hill Pkwy  
East Rutherford, NJ 07073  
U.S.  
T: (+1) 212 629 6830  
E: Sales-US@GENLEDBrands.com

#### EUROPEAN HQ

Hogeweyselaan 119  
1382 JK Weesp  
Netherlands  
T: (+31) 346 235 000  
E: SalesEurope@GENLEDBrands.com

#### MEINA HQ

PO Box 371378, #823, Building 4EA  
Dubai Airport Free Zone  
Dubai, UAE  
T: (+971) 4 701 7901  
E: SalesMEINA@genlebrands.com

#### ASIA-PACIFIC HQ

Room 402, Building D  
Shenshi Tongchuang Science and Technology Park  
No. 16 Hongyin Road  
Xingqiang Community, Xinhua Street  
Guangming District, Shenzhen, China 518107  
T: (+86) 755 8529 0710  
E: Sales-Pacific@GENLEDBrands.com