



**AGILIGHT**  
Innovative Signage Lighting



UL CE RoHS LM-80 IP67

# FLEXRAYZ NEON

## LED BORDER TUBE

FlexRayz Neon from AgiLight offers a versatile approach to border tube that eliminates light gaps. A side-bending LED neon that provides an excellent solution for linear façade lighting in curved or straight runs, FlexRayz features a constant current design that guarantees consistent brightness throughout each run.

### STATIC WHITE


- 3 W/ft (9.8 W/m)
- 6500K (4000K, 5000K upon request)
- Available in 2 ft, 8 ft and 49 ft (15 m) max. length reels
- 2 in. (50 mm) cut lengths

### STATIC COLOR

- 3 W/ft (9.8 W/m)
- Four Static Colors (Red, Green, Blue, Yellow)
- Available in 2 ft., 8 ft. and 49 ft. (15 m) max. length reels
- 2 in. (50 mm) cut lengths

### RGBW

- 5.5 W/ft (18 W/m)
- RGB+6500K (4000K, 5000K upon request)
- Up to 16 million colors with DMX controls
- Available in 2 ft., 8 ft. and 16.4 ft. (5 m) max. length reels
- 3.28 in. (83.3 mm) cut lengths

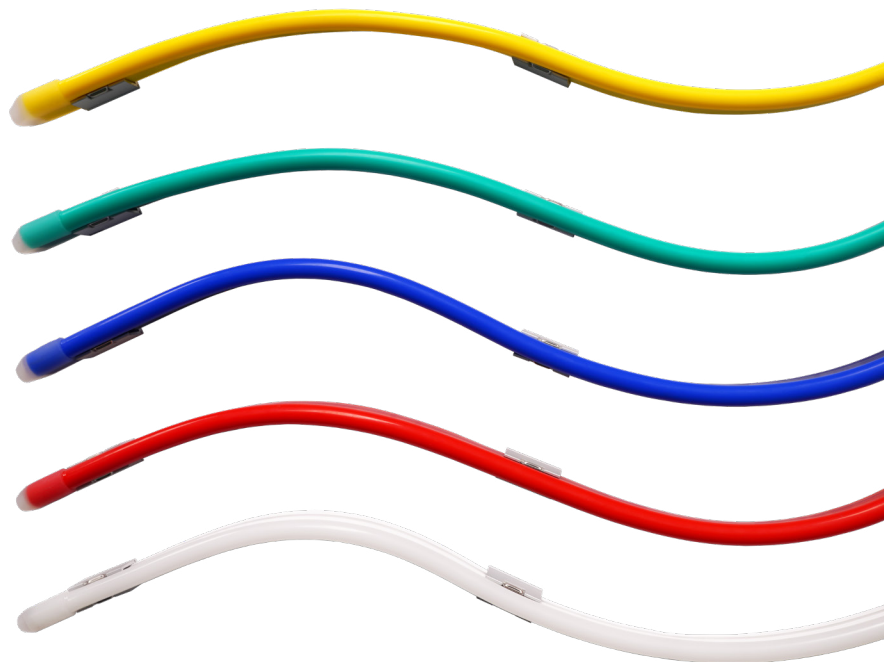


### APPLICATIONS

- Borders and edges in signs and facades
- Neon replacements
- Cove and Accent lighting

### FEATURES




- IP67
- Even illumination without hot spots
- Full reels can be cut and finished with an end cap
- Dual power feeds to minimize waste
- UV protected; saltwater, solvent & flame resistant
- IK08 impact protection



### ACCESSORIES

	Aluminum Mounting Clip	S-type Track for mounting in curved sections	Aluminum Channel for mounting in straight sections	0.5 in. Standoff for mounting above facade surface
L	0.98 in. (25 mm)	19.7 in. (500 mm)	78.7 in. (2000 mm)	0.38 in. (9.5 mm)
W	0.48 in. (12.3 mm)	0.43 in. (11 mm)	0.48 in. (12.3 mm)	0.38 in. (9.5 mm)
H	0.67 in. (17 mm)	0.67 in. (17 mm)	0.67 in. (17 mm)	0.5 in. (12.7 mm)

### DIMENSIONS:

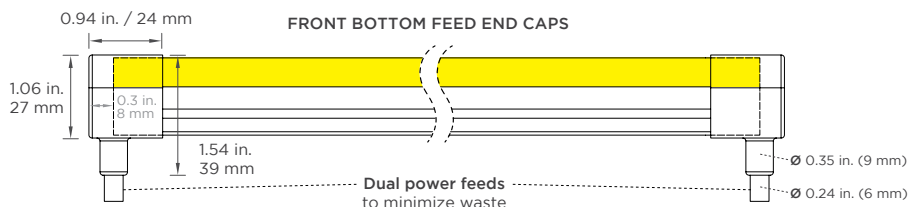

REV.03DEC2025