



STATIC COLOR FLEXRAYZ NEON


FlexRayz Neon from AgiLight offers a versatile approach to border tube that eliminates light gaps. A side-bending LED neon that provides an excellent solution for linear façade lighting in curved or straight runs, Static Color FlexRayz uses a constant current design to provide consistent brightness throughout each run. Rated IP67 for use in damp and wet locations. FlexRayz products are designed to bend; use Aluminum Mounting Channel for straight run applications.

Applications:

- Borders and edges in signs and facades
- Neon replacements
- Cove and Accent lighting

Features:

- Available in pre-assembled 2 ft (0.61 m) or 8 ft (2.44 m) lengths or sold in full reels of 49 ft (15 m)
- Full reels can be cut and finished with an end cap; new power feeds cannot be introduced in the field
- 3 W/ft (9.84 W/m), 24 V DC
- Four Static Colors (Red, Green, Blue, Yellow)
- 2 in. (50 mm) cut lengths

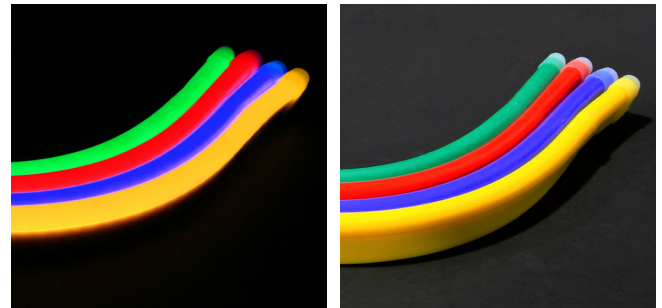

RoHS LM-80 IP67

- 110x250° beam angle
- Use Aluminum Mounting Channel for straight runs
- Use S-type Track or Aluminum Mounting Clips for curves
- Saltwater, solvent, and flame resistant
- IP67; IK08 impact protection
- Consistent brightness with constant current design
- Minimum bend diameter of 2 in. (50 mm)


ORDERING GUIDE

Part Number	Length	Color	Wavelength	Lumens / Foot	Lumens / Meter
LB-FRN-RED-2-A	2 ft / 0.61 m	Red	620 nm	45 lm/ft	147.6 lm/m
LB-FRN-RED-8-A	8 ft / 2.44 m	Red	620 nm	45 lm/ft	147.6 lm/m
LB-FRN-RED-49-A	49 ft / 15 m	Red	620 nm	45 lm/ft	147.6 lm/m
LB-FRN-GRN-2-A	2 ft / 0.61 m	Green	518 nm	40 lm/ft	131.2 lm/m
LB-FRN-GRN-8-A	8 ft / 2.44 m	Green	518 nm	40 lm/ft	131.2 lm/m
LB-FRN-GRN-49-A	49 ft / 15 m	Green	518 nm	40 lm/ft	131.2 lm/m
LB-FRN-BLU-2-A	2 ft / 0.61 m	Blue	462 nm	5 lm/ft	16.4 lm/m
LB-FRN-BLU-8-A	8 ft / 2.44 m	Blue	462 nm	5 lm/ft	16.4 lm/m
LB-FRN-BLU-49-A	49 ft / 15 m	Blue	462 nm	5 lm/ft	16.4 lm/m
LB-FRN-YLW-2-A	2 ft / 0.61 m	Yellow	585 nm	145 lm/ft	475.6 lm/m
LB-FRN-YLW-8-A	8 ft / 2.44 m	Yellow	585 nm	145 lm/ft	475.6 lm/m
LB-FRN-YLW-49-A	49 ft / 15 m	Yellow	585 nm	145 lm/ft	475.6 lm/m

SPECIFICATIONS

Input Voltage	24 V DC
Power Consumption	3 W/ft (9.84 W/m)
Cuttable Length	2 in. (50 mm)
Max. Length	49 ft (15 m)
Available Lengths	2 ft (0.61 m) 8 ft (2.44 m) 49 ft (15 m)
Min. Bending Diameter	2 in. (50 mm)
Ingress Protection	IP67
Impact Protection Rating	IK08
L70 Lifetime @ 60° C	50,000 Hours
Warranty	5 Year Limited Warranty

LUMINOUS INTENSITY DISTRIBUTION




Average Beam Angle (50%): 131.2°

Unit: cd

— C0/180, 148.4°


— C90/270, 114.1°

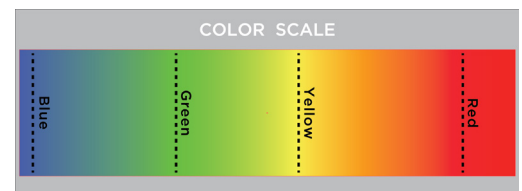




DIMENSIONS

	FlexRayz Neon	Front Bottom Feed End Cap	Closing End Cap (part #: LB-FRN-CAP)
Length	2 ft (0.61 m), 8 ft (2.44 m), and 49 ft (15 m)	0.94 in. (24 mm)	0.94 in. (24 mm)
Width	0.55 in. (14 mm)	0.55 in. (14 mm)	0.55 in. (14 mm)
Height	1.06 in. (27 mm)	1.54 in. (39 mm)	1.06 in. (27 mm)

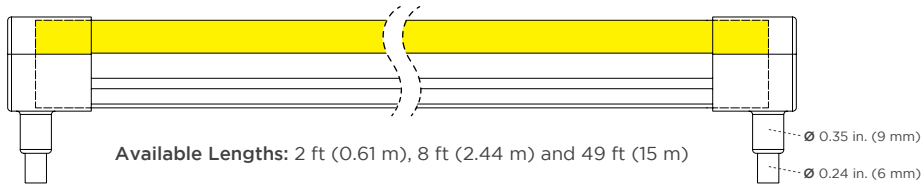


Static Color FlexRayz Neon if cut						
Standard Length (ft)	Actual Light Length		Actual Length with End Caps		Channel Cut Length	
	(ft)	(m)	(ft)	(m)	(ft)	(m)
Single End Feed						
2	1.97	0.6	2.05	0.63	1.82	0.55
8	7.87	2.4	7.96	2.42	7.72	2.35
49	48.88	14.9	48.97	14.92	48.73	14.85
Double End Feed						
2	1.97	0.6	2.13	0.65	1.82	0.55
8	7.87	2.4	8.04	2.45	7.72	2.35
49	48.88	14.9	49.05	14.95	48.73	14.85

Minimum Bending Diameter



Bending Direction



ACCESSORIES

	Closing End Cap	Aluminum Mounting Clip for mounting in curved sections only	S-type Track for mounting in curved sections	Aluminum Channel for mounting in straight sections	0.5 in. Standoff for mounting above facade surface	Silicone Glue
Part No.	LB-FRN-CAP	LB-FRN-CLIPMNT	LB-FRN-CRVMNT	LB-FRN-CHMNT	LB-FRN-STDOFF	LB-FRN-SILGLUE
Length	0.63 in. (16 mm)	0.98 in. (25 mm)	19.7 in. (500 mm)	39.4 in. (1000 mm)	0.38 in. (9.5 mm)	--
Width	0.67 in. (17 mm)	0.48 in. (12.3 mm)	0.43 in. (11 mm)	0.48 in. (12.3 mm)	0.38 in. (9.5 mm)	--
Height	1.24 in. (31.5 mm)	0.67 in. (17 mm)	0.67 in. (17 mm)	0.67 in. (17 mm)	0.5 in. (12.7 mm)	--



POWER SUPPLY LOADING

Product	Power Supply (W)	Max. # of ft/m in a continuous run	Total # of ft/m per power supply NOT in a continuous run
Static Color FlexRayz Neon	60	18 / 5.49	18 / 5.49
	100	30 / 9.14	30 / 9.14
	300	49 / 14.94	90 / 27.43

AVAILABLE POWER SUPPLIES



**30W 24V
POWER SUPPLY**
Part #: PS24-30W-GN
Article #: 28000516A



**100W 24V
POWER SUPPLY**
Part #: PS24-100W-GN
Article #: 28000513A



**60W 24V
POWER SUPPLY**
Part #: PS24-60W-GN
Article #: 28000512A



**300W 24V
POWER SUPPLY**
Part #: PS24-300W-3-GN
Article #: 28000514A

GLOBAL HQ

320 Murray Hill Pkwy
East Rutherford, NJ 07073
T: (+1) 212 629 6830
E: Sales-US@GENLEDBrands.com

[linkedin.com/company/agilight-inc](https://www.linkedin.com/company/agilight-inc)

EUROPEAN HQ

De Corridor 16K
3621ZB Breukelen
Netherlands
T: (+31) 346 235 000
E: SalesEurope@GENLEDBrands.com

[facebook.com/AgiLightLED](https://www.facebook.com/AgiLightLED)

MEINA HQ

PO Box 371378, #823, Building 4EA
Dubai Airport Free Zone, Dubai, UAE
T: (+971) 4 701 7901
E: SalesMEINA@genlebrands.com

[instagram.com/agilightled](https://www.instagram.com/agilightled)

ASIA-PACIFIC HQ

Room 402, Building D
Shenshi Tongchuang Science and Technology Park
No. 16 Hongyin Road
Xingqiang Community, Xihu Street
Guangming District, Shenzhen, China 518107
Sales: (+86) 139 1836 3905
Office: (+86) 755 8529 0710
E: Sales-Pacific@GENLEDBrands.com