

DIRECT AC CHANNELS

Direct AC Channels are used to hold our Direct AC RibbonLyte products in place. Direct AC Aluminum Channel offers a full custom fit with finished end caps and the choice of a flat milky lens or square (raised) milky lens for premium LED diffusion. We recommend using the Direct AC Aluminum Channel for visible Direct AC fixtures. Direct AC Mounting Channel is an open PVC channel that provides incredible friction-fit stability and allows maximum light output in applications such as hidden coves.

Direct AC Aluminum Channel with Square Milky lens

- 0.79 in. (20.1 mm) wide by 1.23 in. (31.2 mm) high
- Provides premium diffusion -- no visible diodes

Direct AC Aluminum Channel with Flat Milky lens

- 0.79 in. (20.1 mm) wide by 0.73 in. (18.5 mm) high
- Provides some diffusion - partially visible diodes

Direct AC Mounting Channel

- 0.72 in. (18.4 mm) wide by 0.41 in. (10.3 mm) high
- Provides no diffusion - fully visible diodes



HOUSING FINISH



Silver

LENS FINISHES




Flat Milky Lens
75% Light Transmission



Square Milky Lens*
70% Light Transmission


Note: Lenses only available for aluminum channel
* For interior applications only

AVAILABLE COLORS & COLOR TEMPERATURES




DIMENSIONS

Direct AC Aluminum Channel

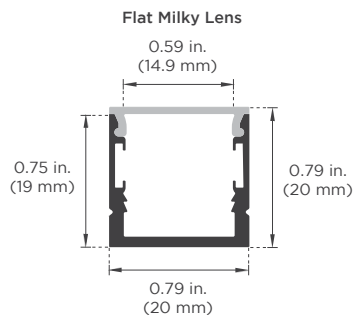


Width: 0.79 in. (20 mm)
Internal width: 0.59 in. (14.9 mm)
Height: 0.75 in. (19 mm)

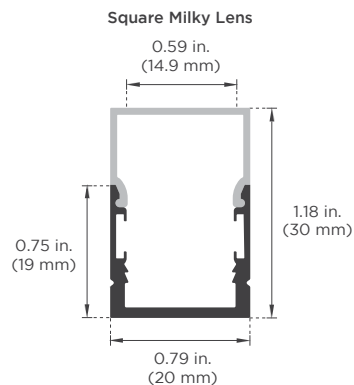

Width: 0.79 in. (20 mm)
Internal width: 0.59 in. (14.9 mm)
Height: 1.18 in. (30 mm)

Direct AC Mounting Channel



Width: 0.72 in. (18.4 mm)
Internal width: 0.59 in. (14.9 mm)
Height: 0.41 in. (10.3 mm)

Note:
Exterior channel applications should be securely attached to the mounting surface with appropriate screws and/or liquid nails. Acolyte strongly recommends field assembly for exterior applications. Use mounting clips for interior applications only.

SPECIFICATIONS

Beam Angle	120°
Lens Type	Flat Milky Lens, Square Milky Lens (aluminum channel only)
Length	Channel is sold by the foot and cut to your exact desired length. Required amount of mounting clips included. (max length for Direct AC Aluminum Channels: 96 in. / 2.44 m; max length for Direct AC Mounting Channels: 4 ft / 1.22 m)
Operating Voltage	120 VAC
Dimming	Dimmable with Lutron Phase-Adaptive Power Module PHPM
Operating Temperature	-4 — 113 °F (-20 — 45 °C)
Colors	2400K, 2700K, 3000K, 3500K, 4000K, 5000K, 6000K, Red, Green, Blue
CRI	90+ CRI (Static white only)
Lifetime (L70 reported)	50,000 hours
MacAdam ellipse (SDCM)	2-Step Binning (For Static White LEDs only)
Certifications	ETL Listed: UL 2108 Issued: 2004/02/27 Ed: 1 Rev: 2014/02/24 Low Voltage Lighting Systems CSA C22.2#9.0 Issued: 1996/06/01 Ed: 1 (R2011) General Requirements for Luminaires; with Gen. Inst. 1: 1997, Gen Inst. 2: 1998. ROHS compliant UL 2108 - Low Voltage Lighting Systems UL 8750 - Light Emitting Diode (LED) Equipment for Use in Lighting Products UL 1598 / CSA 250.0-08 - Luminaires

ORDERING GUIDE

STEP 1 Complete Channel Part Number

CHDACSVSM - Direct AC Aluminum Channel with Flat Milky Lens

CHDACSVSM - Direct AC Aluminum Channel with Square Milky Lens*

CHDACPSWSC - Direct AC Mounting Channel**

*For interior applications only

**Max length for Direct AC Mounting Channel is 4 ft (1.22 m)

STEP 2 Complete RibbonLyte Part Number

Category	CRI	Ribbon Type & IP Rating	Wattage + Color		
RB		AC12065			
RB - RibbonLyte	90 - 90+ CRI Static White	AC12065 - Direct AC 120V IP65	4.024 - 4.0 2400K	4.040 - 4.0 4000K	2.5R - 2.5 Red
	0 - 0 Static Colors		4.027 - 4.0 2700K	4.050 - 4.0 5000K	2.5G - 2.5 Green
			4.030 - 4.0 3000K	4.060 - 4.0 6000K	2.5B - 2.5 Blue
			4.035 - 4.0 3500K		

NOTE: To ensure waterproofing standards are met, IP65 RibbonLyte can NOT be cut in the field.

STEP 3 Complete Assembly Option & Length

ASSEMBLY OPTION LENGTH (Standard factory assembled length up to 78 in. / 2 m with aluminum channels)



FI - Field Assembly

FA - Factory Assembly* * Factory assembly is not recommended for exterior applications

RIBBONLYTE SPECIFICATIONS & COMPATIBILITY


Available Wattages	Cuttable Length	LED Pitch	Color Temp.	lm/w Without Lens / Mounting Channel	Delivered Lumens (lm/ft / lm/m)		Max Length	IP65
					with Flat Milky Lens	with Square Lens		
Static White Direct AC RibbonLyte	4 in. (101.6 mm)	18 LEDs/ft (60 LEDs/m)	2400K	265	186 / 609	186 / 609	164 ft (50 m)	✓
			2700K	275	192 / 630	192 / 630		
			3000K	291	204 / 669	204 / 669		
			3500K	311	218 / 714	218 / 714		
			4000K	308	216 / 708	216 / 708		
			5000K	307	215 / 705	215 / 705		
			6000K	314	220 / 721	220 / 721		
Static Color Direct AC RibbonLyte	4 in. (101.6 mm)	44 LEDs/ft (144 LEDs/m)	Red	20	14 / 46	14 / 46	164 ft (50 m)	✓
			Green	77	54 / 177	54 / 177		
			Blue	21	15 / 48	15 / 48		

DIODE VISIBILITY CHART (Data below applies to installations with aluminum channel with Flat Milky Lens)

 No Visible Diode = N		 With Visible Diode = Y	
Direct AC Aluminum Channel with Flat Milky Lens		Direct AC Aluminum Channel with Square Milky Lens	
Static White Direct AC	Static Color Direct AC	Static White Direct AC	Static Color Direct AC
Y	Y	N	N

DIMMING SYSTEM WIRING DIAGRAM

ADAPTIVE POWER MODULE (RBACPHPM1203W) WITH 3-WIRE DIVA DIMMER (RBACDIMDIVA)

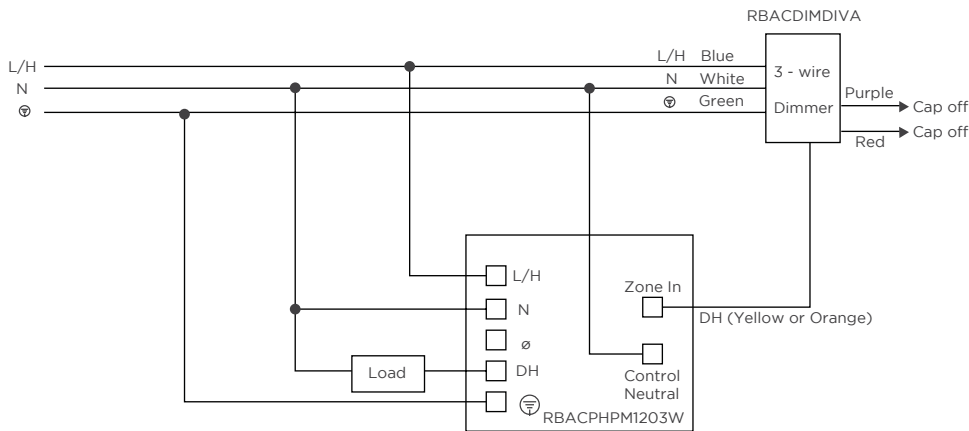

LEGEND

L/H - Line/Hot

N - Neutral


Ø - Not Used

DH - Dimmed Hot

SH - Switched Hot


⊕ - Ground

ADAPTIVE POWER MODULE (RBACPHPM1203W) WITH 3-WIRE NOVA T DIMMER (RBACDIMNOVAT)

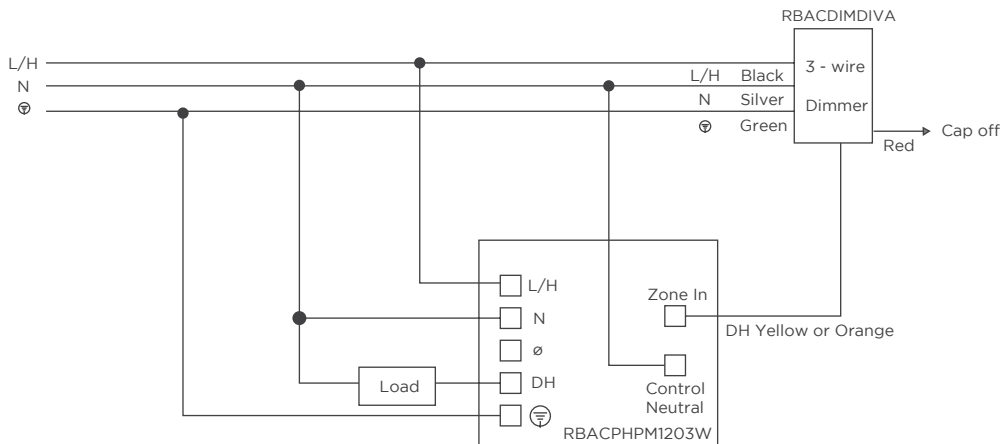

REV.12JUN2025

ADAPTIVE POWER MODULE (RBACPHPM1203W) WITH 3-WIRE MAESTRO DIMMER (RBACDIMMAES)

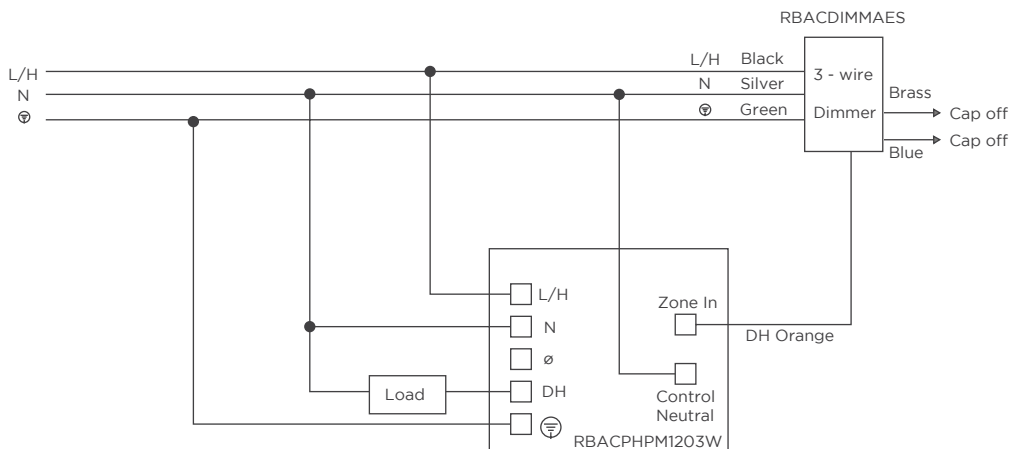

GLOBAL HQ

320 Murray Hill Pkwy
East Rutherford, NJ 07073
U.S.
T: (+1) 212 629 6830
E: Sales-US@GENLEDBrands.com

EUROPEAN HQ

Hogeweyselaan 119
1382 JK Weesp
Netherlands
T: (+31) 346 235 000
E: SalesEurope@GENLEDBrands.com

MEINA HQ

PO Box 371378, #823, Building 4EA
Dubai Airport Free Zone
Dubai, UAE
T: (+971) 4 701 7901
E: SalesMEINA@genleddbrands.com

ASIA-PACIFIC HQ

Room 402, Building D
Shenshi Tongchuang Science and Technology Park
No. 16 Hongyin Road
Xingqiang Community, Xihu Street
Guangming District, Shenzhen, China 518107
T: (+86) 755 8529 0710
E: Sales-Pacific@GENLEDBrands.com