

RGBW ADDRESSABLE RIBBONLYTE

RGBW Addressable RibbonLyte allows you to create completely customized patterns of light that are only limited by the imagination. Each 4-in. pixel can be individually controlled. Pair RGBW Addressable RibbonLyte with simple DMX systems to program moving effects, patterns, chases and more to create an unforgettable light display.

- 6.0 W/ft (19.7 W/m)
- All on: Up to 42 lm/W
- All on: 251.22 lm/ft (824 lm/m)
- 6 LEDs per pixel (18 LEDs/ft, 60 LEDs/m)
- 3.94 in. (100 mm) cuttable length
- 16 ft, 5.83 in. (5.025 m) max. run length (longer sections can be illuminated with multiple pieces of RibbonLyte with lead wire back to the controller or opto splitter)
- 120 degree beam angle
- Controlled with DMX512
- IP67 rating
- 24V input



Applications:

Commercial	Hospitality	Residential
Entertainment	Museums	Retail
Healthcare	Public Spaces	




ORDERING GUIDE

Category	CRI	Ribbon Type & IP Rating	Wattage + Color
RB	0	RGBWADD	
RB - RIBBONLYTE	0 - COLOR CHANGING	RGBWADD - RGBW ADDRESSABLE IP67	6.0RGBW30 - 6.0 W/ft (19.7 W/m) RGBW (3000K) 6.0RGBW40 - 6.0 W/ft (19.7 W/m) RGBW (4000K) 6.0RGBW65 - 6.0 W/ft (19.7 W/m) RGBW (6500K)

See wiring diagram on page 4.

Controllers



6 Universe DMX Controller
Part Number: DMXCTRLDR6U

- 3,072 channels
- 20 zones
- 2,000 scenes
- 16 mb internal memory



DMX Opto Splitter
Part Number: DMXOS8

- 8 DMX output terminals for 1 DMX input

AVAILABLE COLORS




SPECIFICATIONS / DIAGRAM / USAGE GUIDELINES

RGBW ADDRESSABLE RIBBONLYTE	
Operating Voltage	24 V
Power Consumption	6 W/ft (19.7 W/m)
Current (mA) - 24 V	250 mA/ft (820 mA/m)
LED Pitch	18 LEDs/ft (60 LEDs/m)
Protection Rating	IP67
Dimming/Control	Controlled by DMX or SPI with an external interface and driver
Ambient/Storage Temperature	-4 – 113 °F (-20 – 45 °C) / -40 – 158 °F (-40 – 70 °C)
LED Beam Angle	120°
Lifetime (L70 reported)	50,000 hours
Cutable Length	3.94 in. (100 mm)
Constant Voltage	✓
Max Run Length	16 ft 5.83 in. (5.025 m)
Cable Length Attached to RibbonLyte	11.81 in. (300 mm)
Total Multiple Runs on Single DMX Universe	42 ft (12.8 m)
Certifications	UL 2108 Issued: 2016/06/17 Ed: 1 Rev: 2021/10/16 Low Voltage Lighting Systems. CSA C22.2 No. 250.0, General Requirements for Luminaires. ROHS compliant

RGBW (3000K)					
	Red	Green	Blue	White (3000K)	All On
Power Consumption	1.5 W/ft (4.92 W/m)	1.5 W/ft (4.92 W/m)	1.5 W/ft (4.92 W/m)	1.5 W/ft (4.92 W/m)	6 W/ft (19.7 W/m)
Lumen	33.54 lm/ft (110.01 lm/m)	90.24 lm/ft (295.99 lm/m)	21.34 lm/ft (70 lm/m)	97.56 lm/ft (320 lm/m)	234.15 lm/ft (768.01 lm/m)
Efficacy	22 lm/W	60 lm/W	14 lm/W	65 lm/W	39 lm/W
RGBW (4000K)					
	Red	Green	Blue	White (4000K)	All On
Power Consumption	1.5 W/ft (4.92 W/m)	1.5 W/ft (4.92 W/m)	1.5 W/ft (4.92 W/m)	1.5 W/ft (4.92 W/m)	6 W/ft (19.7 W/m)
Lumen	33.54 lm/ft (110.01 lm/m)	90.24 lm/ft (295.99 lm/m)	21.34 lm/ft (70 lm/m)	103.66 lm/ft (340 lm/m)	246.34 lm/ft (808 lm/m)
Efficacy	22 lm/W	60 lm/W	14 lm/W	69 lm/W	41 lm/W
RGBW (6500K)					
	Red	Green	Blue	White (6500K)	All On
Power Consumption	1.5 W/ft (4.92 W/m)	1.5 W/ft (4.92 W/m)	1.5 W/ft (4.92 W/m)	1.5 W/ft (4.92 W/m)	6 W/ft (19.7 W/m)
Lumen	33.54 lm/ft (110.01 lm/m)	90.24 lm/ft (295.99 lm/m)	21.34 lm/ft (70 lm/m)	106.71 lm/ft (350 lm/m)	251.22 lm/ft (824 lm/m)
Efficacy	22 lm/W	60 lm/W	14 lm/W	71 lm/W	42 lm/W

Dimensions

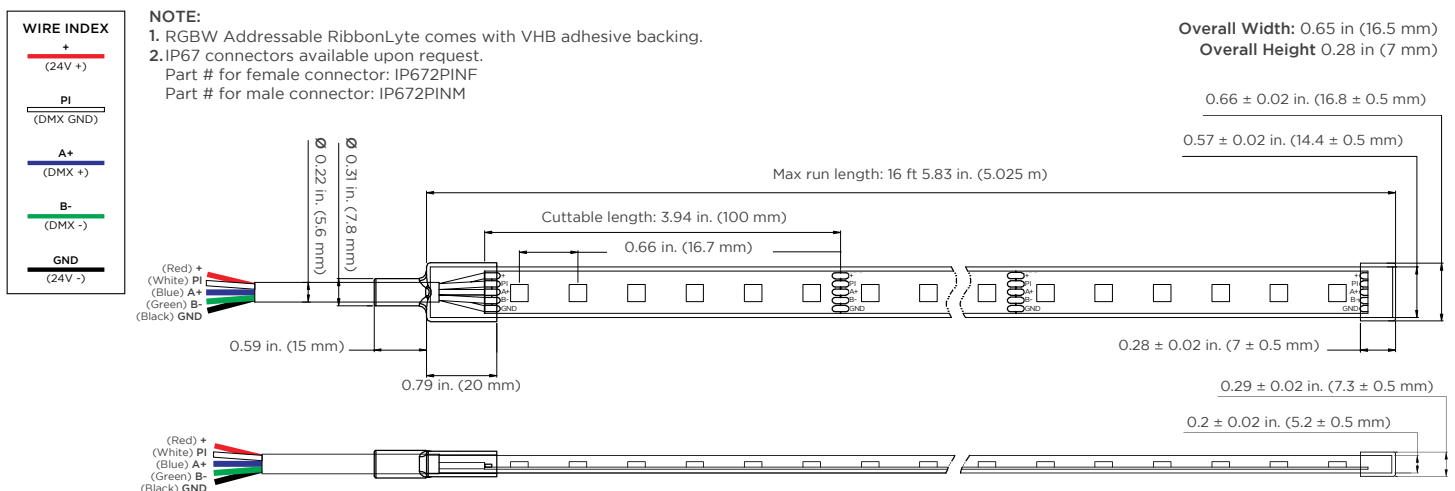


WIRING DIAGRAMS

One DMX Universe consists of 128 addresses and 512 channels (42 ft / 12.8 m of RibbonLyte).

Any single run of RibbonLyte that is less than 16 ft, 4 in. can be wired directly to the controller.

For additional runs, Opto Splitter must be used. Each individual run will need its own Opto Splitter output.

WIRE INDEX	
+	(24V +)
PI	(DMX GND)
A+	(DMX +)
B-	(DMX -)
GND	(24V -)

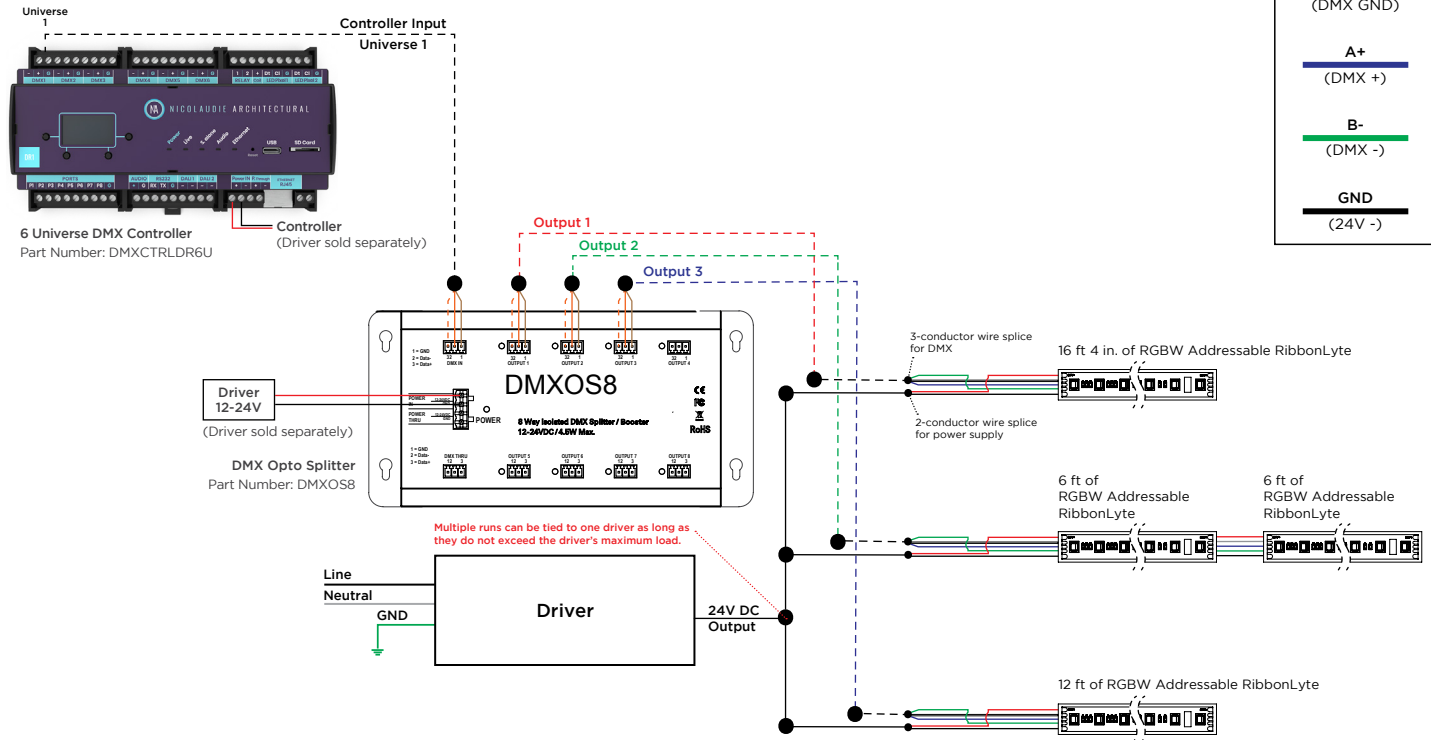

MAX LENGTH BETWEEN DRIVER & RIBBONLYTE AT FULL LOAD																
Wattages	40		60		96 + 100		150		200		240		300		320	
Wire Gauge	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters
24 AWG / 0.25 mm ²	14	4.27	9	2.74	5.5	1.68	3.75	1.14	2.75	0.84	2.25	0.69	1.75	0.53	1.75	0.53
22 AWG / 0.34 mm ²	22	6.71	14	4.27	9	2.74	5.75	1.75	4.5	1.37	3.5	1.07	2.75	0.84	2.75	0.84
20 AWG / 0.5 mm ²	35	10.67	23	7.01	14	4.27	9	2.74	7	2.13	5.75	1.75	4.5	1.37	4.25	1.30
18 AWG / 0.75 mm ²	56	17.07	37	11.28	23	7.01	15	4.57	11	3.35	9	2.74	7.5	2.29	7	2.13
16 AWG / 1.5 mm ²	90	27.44	60	18.29	37	11.28	24	7.32	18	5.49	15	4.57	12	3.66	11	3.35
14 AWG / 2.5 mm ²	142	43.29	95	28.96	59	17.99	38	11.59	28	8.54	23	7.01	19	5.79	17	5.18
12 AWG / 4 mm ²	226	68.90	151	46.04	94	28.66	60	18.29	45	13.72	37	11.28	30	9.15	28	8.54
10 AWG / 6 mm ²	360	109.76	240	73.17	150	45.73	96	29.27	72	21.95	60	18.29	48	14.63	45	13.72
8 AWG / 10 mm ²	574	175.00	381	116.16	239	72.87	153	46.65	115	35.06	95	28.96	76	23.17	71	21.65

REV.08MAY2026

<p>GLOBAL HQ 320 Murray Hill Pkwy East Rutherford, NJ 07073 U.S. T: (+1) 212 629 6830 E: Sales-US@GENLEDBrands.com</p>	<p>EUROPEAN HQ Hogeweyselaan 119 1382 JK Weesp Netherlands T: (+31) 346 235 000 E: SalesEurope@GENLEDBrands.com</p>	<p>MEINA HQ PO Box 371378, #823, Building 4EA Dubai Airport Free Zone Dubai, UAE T: (+971) 4 701 7901 E: SalesMEINA@genlebrands.com</p>	<p>ASIA-PACIFIC HQ Room 402, Building D Shenshi Tongchuang Science and Technology Park No. 16 Hongyin Road Xingqiang Community, Xinhui Street Guangming District, Shenzhen, China 518107 T: (+86) 755 8529 0710 E: Sales-Pacific@GENLEDBrands.com</p>
---	--	--	--