






# PERCEPTION PENDANT SERIES

The Perception Pendant Series offers customizable 24V pendants in five nominal lengths\* ranging from 2 ft (609 mm) to 8 ft (2409 mm). Perception Pendants are direct lighting pendants that offer a choice of premium optics to create the perfect beam of light for your application. Pick from 60° louvers, Asymmetric lenses or milky diffuser lenses. The flexible Perception Pendant Series also allows us to build complementary recessed, mud-in and ceiling mounted fixtures. The larger Perception Plus pendants let you choose direct or direct/indirect lighting and pick from 60° louvers or milky lenses, all with complementary sconces.

## COLOR TEMPERATURES



## HOUSING FINISHES

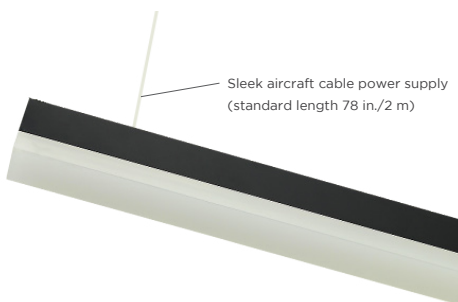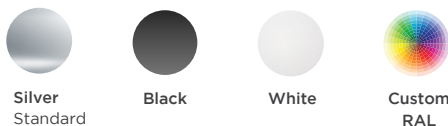


Sleek aircraft cable power supply  
(standard length 78 in./2 m)

1 in. (25 mm) wide  
\* 2 ft. (613 mm), 4 ft. (1213 mm), 5 ft. (1513 mm),  
6 ft. (1813 mm)\*, 8 ft. (2413 mm)



## PERCEPTION PENDANT

- Direct pendants
- Complementary recessed, mud-in and ceiling mounted fixtures
- 60° louver, Asymmetric lens, Milky lens or Square Milky lens
- 6 CCTs: 2700K, 3000K, 3500K, 4000K, 5000K, 6500K
- 625 lm/ft (2051 lm/m) with milky lens

## MOUNTING OPTIONS

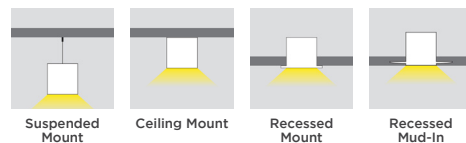

## OPTIC OPTIONS

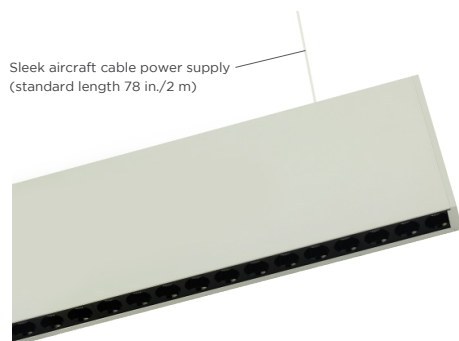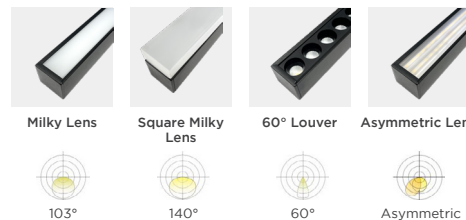


Sleek aircraft cable power supply  
(standard length 78 in./2 m)

1 in. (25 mm) wide by 4 in. (100 mm) high  
\* 2 ft. (613 mm), 4 ft. (1213 mm), 5 ft. (1513 mm),  
6 ft. (1813 mm)\*, 8 ft. (2413 mm)


## PERCEPTION PLUS PENDANTS

- Direct or direct/indirect pendants
- Complementary direct/indirect sconces
- 60° louver or Milky lens (both direct, milky indirect)
- Batwing optic available for indirect lighting
- 6 CCTs: 2700K, 3000K, 3500K, 4000K, 5000K, 6500K
- Direct lighting up to 560 lm/ft (1836 lm/m)
- Indirect lighting up to 483 lm/ft (1583 lm/m)

## MOUNTING OPTIONS



## OPTIC OPTIONS

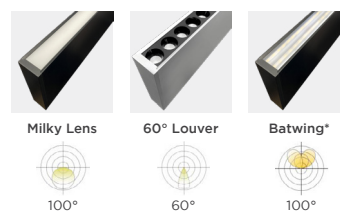

\*Indirect Lighting Only