





Date _____ Project _____

Notes _____

PERCEPTION PLUS PENDANT FIXTURE

Perception Plus pendants from Acolyte offer customizable pendants available in five nominal lengths* from 2 ft (613 mm) to 8 ft. (2413 mm). Choose direct or direct/indirect lighting and mix and match different optic lenses to create the perfect beam of light for your application! The Perception Pendant Series also allows us to create complementary sconces. Available in six CCTs ranging from 2700K to 6500K.

- Pendant or wall-mounted fixtures
- 5 Nominal Length options*: from 2 ft. (613 mm) to 8 ft. (2413 mm)
- Direct/Indirect lighting
- 6 CCTs: 2700K, 3000K, 3500K, 4000K, 5000K, 6500K
- Lumen output up to 560 lm/ft (1840 lm/m)
- Use with remote drivers (sold separately)
- Available in silver, black, and white finishes

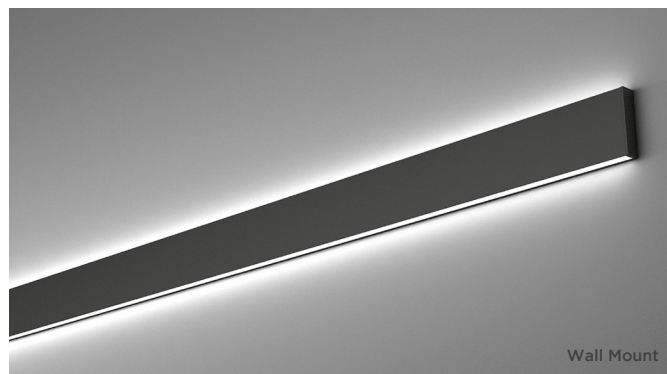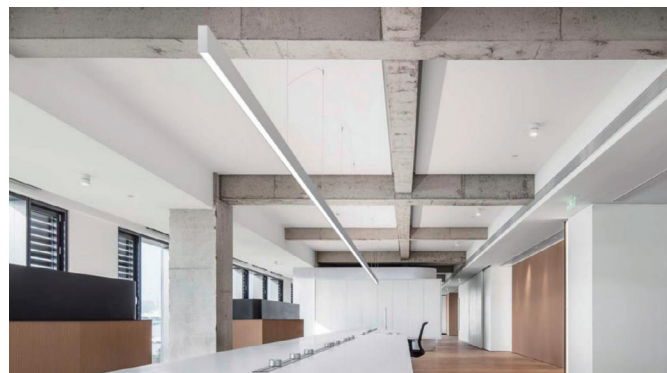


HOUSING FINISHES



Silver Black White
Default finish

Note: Custom colors available upon request

COLOR TEMPERATURES




2700K 3000K 3500K 4000K 5000K 6500K

MOUNTING OPTIONS



Wall Mount Suspended Mount

OPTIC OPTIONS

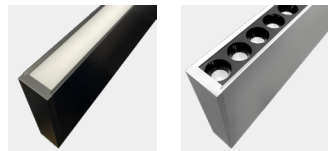

Milky Lens 60° Louver



100° 60°



ORDERING GUIDE

Model	Mounting Type	Length*		Color Temperature Direct		Color Temperature Indirect	
PPN							
PPN - Perception Plus	P - Suspended Pendant	2 - 2 ft (613 mm)	6 - 6 ft (1813 mm)***	27 - 2700K	40 - 4000K	27 - 2700K	40 - 4000K
	W - Wall Mount	4 - 4 ft (1213 mm)	8 - 8 ft (2413 mm)	30 - 3000K	50 - 5000K	30 - 3000K	50 - 5000K
		5 - 5 ft (1513 mm)		35 - 3500K****	65 - 6500K	35 - 3500K****	65 - 6500K





Optics Direct		Optics Indirect		Surface Finish		
M - Milky**	60 - 60° Louver	M - Milky**	60 - 60° Louver	SV - Silver	WH - White	* See exact fixture lengths on page 3 ** Milky lens not available with wall mounted models *** Not available with 60° Louver **** May have longer lead time and MOQ NOTE: 180° Coupler and Canopy Kit must be ordered separately. See page 2 for more details.
				BK - Black	C - Custom RAL	

SPECIFICATIONS

Beam Angle	110° with Milky Lens Direct Lighting, 100° with Milky Lens Indirect Lighting, 60° with 60° Louver Direct/Indirect Lighting
Lens Types	Milky Lens (PMMA), 60° Louver
Nominal Length (see exact lengths on page 3)	2 ft. (613 mm), 4 ft. (1213 mm), 5 ft. (1513 mm), 6 ft. (1813 mm)*, 8 ft. (2413 mm)
Operating Voltage	24V DC (remote driver with 100-277 VAC Input)
Dimming	0-10V, DALI
Available Colors	2700K, 3000K, 3500K, 4000K, 5000K, 6500K
Efficacy	92 lm/W with milky lens
Light Output	560 lm/ft (1840 lm/m)
CRI	80+ Standard, 90+ Optional
Certifications	UL, CE, RoHS

* Not available with 60° Louver

ACCESSORIES

<p>180° Coupler Part #: PN180CONNPS</p> 	<p>Suspended Mounting Kit (included accessory)</p> 	<p>Canopy Kit Silver Canopy Kit Part #: PNCANOPYKITSV Black Canopy Kit Part #: PNCANOPYKITBK White Canopy Kit Part #: PNCANOPYKITWH</p>  <p>Each fixture requires two Canopy Kits.</p>	<p>Keyhole Slot for Wall Mount No accessory needed. See installation guide for details</p>  <p>Keyholes every 21.65 in. (550 mm)</p> <p>Ø 0.2 in. (5.1 mm) Ø 0.46 in. (11.7 mm)</p>
--	---	---	---

DIMENSIONS



Acolyte does not warrant or represent that the information is free from errors or omission. The information may change without notice and Acolyte is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

EXACT FIXTURE LENGTHS

Nominal Length	Exact Fixture Length with Milky Lens				Exact Fixture Length with 60° Louver			
	mm	in.	ft	Wattage	mm	in.	ft	Wattage
2	609	23.9	1.99	24 W	543	21.3	1.78	21.6 W
4	1209	47.5	3.96	48 W	1083	42.6	3.55	43.2 W
5	1509	59.3	4.94	60 W	1515	59.5	4.96	60.6 W
6	1809	71.1	5.92	72 W	N/A	N/A	N/A	N/A
8	2409	94.7	7.89	96 W	2161	84.9	7.08	86.4 W

LUMEN

Optic	Light Output (lm/ft)	Light Output (lm/m)	Efficacy (lm/W)	Beam Angle
Milky Lens Direct Lighting	560	1836	92	110
Square Milky Lens Indirect Lighting	489	1603	81	100
60° Louver Direct Lighting	483	1583	79	60
60° Louver Indirect Lighting	356	1167	58	60

REV.04MAR2025

GLOBAL HQ

320 Murray Hill Pkwy
East Rutherford, NJ 07073
U.S.
T: (+1) 212 629 6830
E: Sales-US@GENLEDBrands.com

EUROPEAN HQ

Hogeweyselaan 119
1382 JK Weesp
Netherlands
T: (+31) 346 235 000
E: SalesEurope@GENLEDBrands.com

MEINA HQ

PO Box 371378, #823, Building 4EA
Dubai Airport Free Zone
Dubai, UAE
T: (+971) 4 701 7901
E: SalesMEINA@genlebrands.com

ASIA-PACIFIC HQ

Room 402, Building D
Shensi Tongchuang Science and Technology Park
No. 16 Hongyin Road
Xingqiang Community, Xihu Street
Guangming District, Shenzhen, China 518107
Sales: (+86) 139 1836 3905
Office: (+86) 755 8529 0710
E: Sales-Pacific@GENLEDBrands.com