



Date _____ Project _____

Notes _____

PERCEPTION PLUS PENDANT FIXTURE

Perception Plus Pendants from Acolyte offer customizable pendants available in five nominal lengths* from 2 ft (613 mm) to 8 ft. (2413 mm). Choose direct or direct/indirect lighting and mix and match different optic lenses to create the perfect beam of light for your application! Pick from milky lens, 60° louver or Batwing. The flexible Perception Pendant Series also allows us to create complementary sconces. Available in six CCTs ranging from 2700K to 6500K.

- Pendant or wall-mounted fixtures
- 5 Nominal Length options*: from 2 ft. (613 mm) to 8 ft. (2413 mm)
- Direct/Indirect lighting
- 6 CCTs: 2700K, 3000K, 3500K, 4000K, 5000K, 6500K
- Lumen output up to 560 lm/ft (1840 lm/m)
- Use with remote drivers (sold separately)
- Available in silver, black, and white finishes

HOUSING FINISHES




Silver Black White

Default finish


Note: Custom colors available upon request

COLOR TEMPERATURES



2700K 3000K 3500K 4000K 5000K 6500K

MOUNTING OPTIONS



Wall Mount

Suspended Mount

OPTIC OPTIONS



Milky Lens

60° Louver

Batwing



100°



60°



100°

Indirect Lighting Only

ORDERING GUIDE

| Model | Mounting Type | Length* | | Color Temperature Direct | | Color Temperature Indirect | |
|-----------------------|-----------------------|--------------------|----------------------|--------------------------|------------|----------------------------|------------|
| PPN | | | | | | | |
| PPN - Perception Plus | P - Suspended Pendant | 2 - 2 ft (613 mm) | 6 - 6 ft (1813 mm)** | 27 - 2700K | 40 - 4000K | 27 - 2700K | 40 - 4000K |
| | | 4 - 4 ft (1213 mm) | 8 - 8 ft (2413 mm) | 30 - 3000K | 50 - 5000K | 30 - 3000K | 50 - 5000K |
| | W - Wall Mount | 5 - 5 ft (1513 mm) | | 35 - 3500K*** | 65 - 6500K | 35 - 3500K*** | 65 - 6500K |

Optics Direct

M - Milky 60 - 60° Louver


Optics Indirect

M - Milky 60 - 60° Louver
BW - Batwing


Surface Finish

SV - Silver WH - White
BK - Black C - Custom RAL

* See exact fixture lengths on page 3
** Not available with 60° Louver
*** May have longer lead time and MOQ

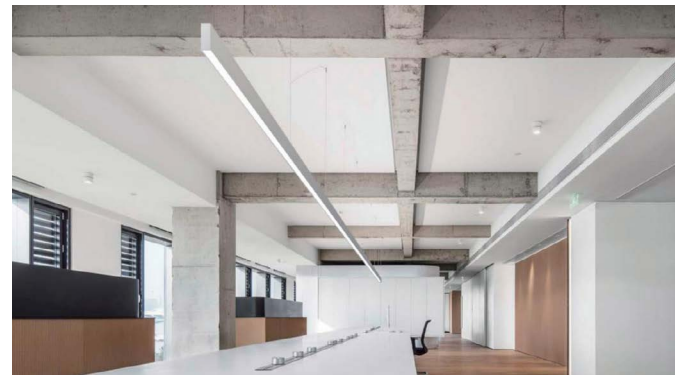

Suspended Mount

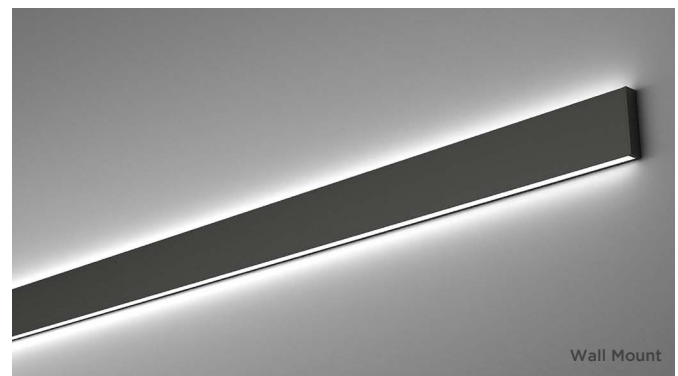

Wall Mount







SPECIFICATIONS

| | |
|--|--|
| Beam Angle | 110° with Milky Lens Direct Lighting, 100° with Milky Lens Indirect Lighting, 60° with 60° Louver Direct/Indirect Lighting, 100° with Batwing Indirect Lighting Only |
| Lens Types | Milky Lens (PMMA), 60° Louver, Batwing |
| Nominal Length (see exact lengths on page 3) | 2 ft. (613 mm), 4 ft. (1213 mm), 5 ft. (1513 mm), 6 ft. (1813 mm)*, 8 ft. (2413 mm) |
| Operating Voltage | 24V DC (remote driver with 100-277 VAC Input) |
| Dimming | 0-10V, DALI |
| Available Colors | 2700K, 3000K, 3500K, 4000K, 5000K, 6500K |
| Efficacy | 92 lm/W with milky lens |
| Light Output | 560 lm/ft (1840 lm/m) |
| CRI | 80+ Standard, 90+ Optional |
| Certifications | UL, CE, RoHS |

* Not available with 60° Louver

ACCESSORIES

| | | | |
|---|---|---|--|
| <p>180° Coupler (Part #: PN180CONNPS)</p>  | <p>Suspended Mounting Kit (included accessory)</p>  | <p>Canopy Kit (included accessory)</p> <p>Canopy color matches fixture finish</p>  | <p>Keyhole Slot for Wall Mount No accessory needed. See installation guide for details</p> <p>Keyholes every 21.65 in. (550 mm)</p>  |
|---|---|---|--|

DIMENSIONS

| | |
|--|---|
| <p>Suspended Mount</p>  <p>3.94 in. (100 mm)</p> <p>0.98 in. (25 mm)</p> | <p>Wall Mount</p>  <p>3.94 in. (100 mm)</p> <p>0.98 in. (25 mm)</p> |
|--|---|

Acolyte does not warrant or represent that the information is free from errors or omission. The information may change without notice and Acolyte is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

EXACT FIXTURE LENGTHS

| Nominal Length | | Exact Fixture Length with Batwing or Milky Lens | | | Exact Fixture Length with 60° Louver | | | |
|----------------|------|---|------|---------|--------------------------------------|------|------|---------|
| ft | mm | in. | ft | Wattage | mm | in. | ft | Wattage |
| 2 | 609 | 23.9 | 1.99 | 24 W | 543 | 21.3 | 1.78 | 21.6 W |
| 4 | 1209 | 47.5 | 3.96 | 48 W | 1083 | 42.6 | 3.55 | 43.2 W |
| 5 | 1509 | 59.3 | 4.94 | 60 W | 1515 | 59.5 | 4.96 | 60.6 W |
| 6 | 1809 | 71.1 | 5.92 | 72 W | N/A | N/A | N/A | N/A |
| 8 | 2409 | 94.7 | 7.89 | 96 W | 2161 | 84.9 | 7.08 | 86.4 W |

LUMEN

| Optic | Light Output (lm/ft) | Light Output (lm/m) | Efficacy (lm/W) | Beam Angle |
|-------------------------------------|----------------------|---------------------|-----------------|------------|
| Milky Lens Direct Lighting | 560 | 1836 | 92 | 110 |
| Square Milky Lens Indirect Lighting | 489 | 1603 | 81 | 100 |
| 60° Louver Direct Lighting | 483 | 1583 | 79 | 60 |
| 60° Louver Indirect Lighting | 356 | 1167 | 58 | 60 |
| Batwing Indirect Lighting | 707 | 2320 | 116 | 100 |