



Date _____ Project _____

Notes _____

4 ZONE VW GLASS TOUCH WALL CONTROLLER

The 4 Zone VW Glass Touch Wall Controller manages 4 zones for Variable White lighting from an elegant touch-sensitive display. Easily change color temperatures and brightness with simple CCT shortcut buttons, a precise CCT touch circle and a brightness touch slider. Program and save unique transitions and effects with 4 scene keys.

- Simple control for Variable White
- 4 zones / 4 scenes
- 12-24 V DC input
- 1 universe / 512 DMX channels
- DMX512 output protocol (Bluetooth 5.0 optional)
- CCT shortcut buttons and touch circle
- Brightness slider bar




Applications:

- | | | |
|---------------|---------------|-------------|
| Commercial | Hospitality | Residential |
| Entertainment | Museums | Retail |
| Healthcare | Public Spaces | |



DIMENSIONS



Width: 2.95 in (75 mm)
Length: 4.72 in (120 mm)
Depth: 1.16 in (29.5 mm)

ORDERING GUIDE

STANDARD


Category

AWCVWBK

AWCVWBK - 4 Zone VW Glass Touch Wall Controller

Acolyte does not warrant or represent that the information is free from errors or omission. The information may change without notice and Acolyte is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.


FEATURES

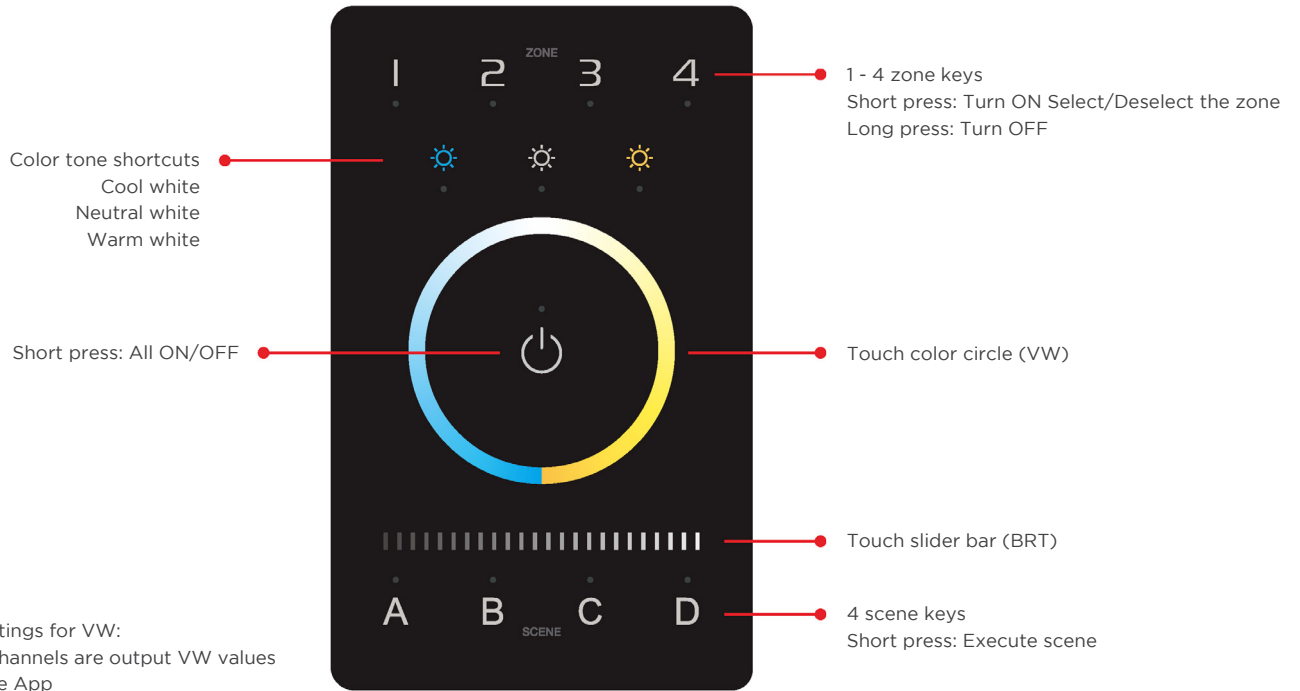

DMX address settings for VW:
Standard: Both channels are output VW values
Default: Set in the App

SPECIFICATIONS / DIMENSION DRAWING

TECHNICAL DATA	
Input Power	12-24V DC
Output Protocol	DMX512
Wireless Protocol	Bluetooth 5.0 SIG Mesh
Available Colors	Black
Zones	4
Temperature	14° - 113° F (-20° - 55° C)
Dimensions	2.95 x 4.72 x 1.16 in. (75 x 120 x 29.5 mm)
Weight	0.5 lb (225 g)
Standards	UL, RoHS, FCC, CE

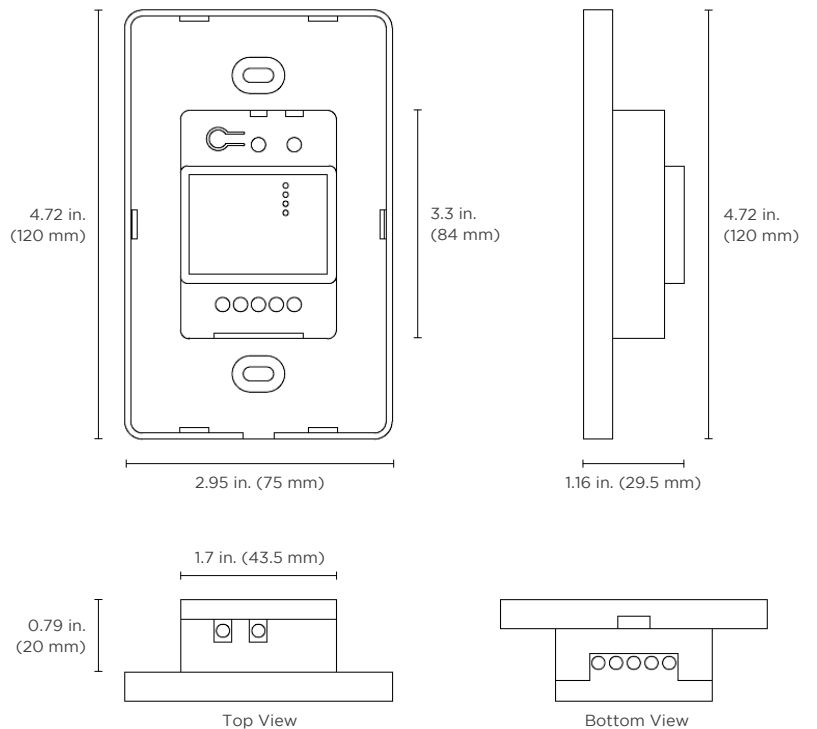

Acolyte does not warrant or represent that the information is free from errors or omission. The information may change without notice and Acolyte is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

WIRING DIAGRAM

