

Date

Notes

## 4 ZONE VW GLASS TOUCH WALL CONTROLLER

The 4 Zone VW Glass Touch Wall Controller manages 4 zones for Variable White lighting from an elegant touch-sensitive display. Easily change color temperatures and brightness with simple CCT shortcut buttons, a precise CCT touch circle and a brightness touch slider. Program and save unique transitions and effects with 4 scene keys.

- Simple control for Variable White
- 4 zones / 4 scenes
- 12-24 V DC input
- 1 universe / 512 DMX channels
- DMX512 output protocol (Bluetooth 5.0 optional)
- · CCT shortcut buttons and touch circle
- · Brightness slider bar



Commercial Entertainment

Hospitality Museums Residential Retail

Healthcare

**Public Spaces** 













Project



## DIMENSIONS





Width: 2.95 in (75 mm) Length: 4.72 in (120 mm) Depth: 1.16 in (29.5 mm)

#### ORDERING GUIDE

Category


AWCVWBK

AWCVWBK - 4 Zone VW Glass Touch Wall Controller

Acolyte does not warrant or represent that the information is free from errors or omission. The information may change without notice and Acolyte is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

## 4 ZONE COLOR VW TOUCH WALL CONTROLLER

#### **FEATURES**

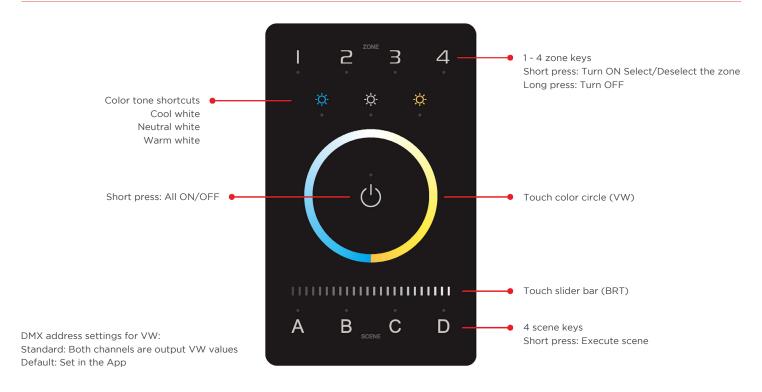

# SPECIFICATIONS / DIMENSION DRAWING

TECHNICAL DAT	A		
Input Power	12-24V DC		
Output Protocol	DMX512		
Wireless Protocol	Bluetooth 5.0 SIG Mesh		
Available Colors	Black		4.72 in. (120 mm)
Zones	4		
Temperature	14° - 113° F (-20° - 55° C)	(120 mm)	
Dimensions	2.95 x 4.72 x 1.16 in. (75 x 120 x 29.5 mm)		
Weight	0.5 lb (225 g)		
Standards	UL, RoHS, FCC, CE	2.95 in. (75 mm) 1.16 in. (29.5 mm)	
		0.79 in. (20 mm)	

Acolyte does not warrant or represent that the information is free from errors or omission. The information may change without notice and Acolyte is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.


Top View

Bottom View



## 4 ZONE COLOR VW TOUCH WALL CONTROLLER

#### WIRING DIAGRAM

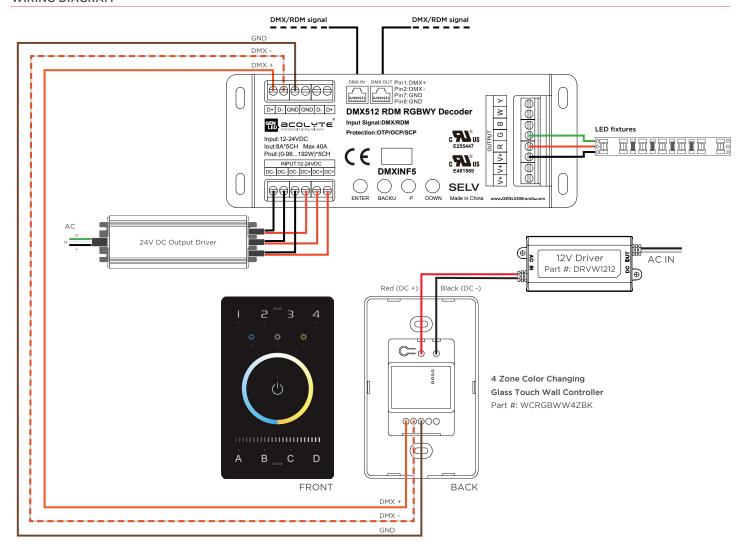

REV.03OCT2025

#### GLOBAL HQ

320 Murray Hill Pkwy East Rutherford, NJ 07073 U.S. T: (+1) 212 629 6830

E: Sales-US@GENLEDBrands.com

# **EUROPEAN HQ**

Hogeweyselaan 119 1382 JK Weesp Netherlands T: (+31) 346 235 000 E: SalesEurope@GENLEDBrands.com

## MEINA HQ

PO Box 371378, #823, Building 4EA Dubai Airport Free Zone Dubai, UAE T: (+971) 4 701 7901 E: SalesMEINA@genledbrands.com

Room 402, Building D Shenshi Tongchuang Science and Technology Park No. 16 Hongyin Road Xingqiang Community, Xinhu Street Guangming District, Shenzhen, China 518107 T: (+86) 755 8529 0710 E: Sales-Pacific@GENLEDBrands.com

ASIA-PACIFIC HQ