

## ATOM LINEAR FIXTURE

The Atom Linear Fixture is designed with a compact form and precision beam angle control for indoor wall grazer applications in minimal space. It has two beam angle options, including one with a built-in honeycomb louver. Available in three lengths and six Static White CCTs (2700K-6000K), Atom fixtures are easy to install and connect.

- Three lengths:  
6W, 9 LEDs per 11.8 in. (300 mm) fixture  
12 W, 18 LEDs per 23.6 in. (600 mm) fixture  
24 W, 36 LEDs per 47.2 in. (1200 mm) fixture
- 2700K, 3000K, 3500K, 4000K, 5000K, 6000K
- Beam Angles: 25°x25°, 25°x35°  
(25°x35° uses honeycomb louver)
- Install with 180° tiltable stands
- 80+ CRI
- Dim with 0-10V, DALI, Triac
- IP40 for indoor use

### Applications:

Commercial      Museums  
Entertainment      Public Spaces



## ORDERING GUIDE

Category	Length	Glare Shield	Color Temp.	FWHM Beam Angle	Mounting Options
<b>ATOM</b>					
<b>ATOM - Atom Linear</b>	<b>12</b> - 11.8 in. / 300 mm (6 W)	<b>NS</b> - No Shield	<b>27</b> - 2700K	<b>25x25</b> - 25°x25°	<b>TS</b> - Tilttable Stand
	<b>24</b> - 23.6 in. / 600 mm (12 W)	<b>GS</b> - Glare Shield	<b>30</b> - 3000K	<b>25x35</b> - 25°x35°*	<b>SI</b> - Symmetric Clip
	<b>47</b> - 47.2 in. / 1200 mm (24 W)		<b>35</b> - 3500K		<b>QR</b> - Quick Release Clip
			<b>40</b> - 4000K	* 25°x35° with honeycomb louver	
			<b>50</b> - 5000K		
			<b>60</b> - 6000K		

### OPTIONAL ACCESSORIES:

#### 1.) Symmetric Louver:

ATOMLOUV300 (300 mm)  
ATOMLOUV600 (600 mm)  
ATOMLOUV1200 (1200 mm)

#### 3.) 2 Pin Female Cable to Bare Wire:

ATOMCBLFB300 (300 mm)  
ATOMCBLFB2000 (2000 mm)  
ATOMCBLFB6000 (6000 mm)


#### 2.) Asymmetric Louver:

ATOMALOUV300 (300 mm)  
ATOMALOUV600 (600 mm)  
ATOMALOUV1200 (1200 mm)


#### 4.) 2 Pin Male To Female Jumper Cable:

ATOMJUMPMF300 (300 mm)  
ATOMJUMPMF600 (600 mm)  
ATOMJUMPMF1800 (1800 mm)

## AVAILABLE COLOR TEMPERATURES





## BEAM ANGLES




SPECIFICATIONS / DIMENSIONS

Operating Voltage	24 V DC					
Amperage	257 mA/ft					
Length	11.8 in. / 300 mm		23.6 in. / 600 mm		47.2 in. / 1200 mm	
Power Consumption	6 W		12 W		24 W	
LEDs per Fixture	9 LEDs		18 LEDs		36 LEDs	
Max. Run Length	Up to 12 fixtures		Up to 6 fixtures		Up to 4 fixtures	
Weight	6.9 oz (0.20 kg)		13.8 oz (0.39 kg)		27.6 oz (0.78 kg)	
Color Temperature	2700K, 3000K, 3500K, 4000K, 5000K, 6000K					
Beam Angle	25°x25°	25°x35° (honeycomb louver)	25°x25°	25°x35° (honeycomb louver)	25°x25°	25°x35° (honeycomb louver)
Lumen Output / Foot	619.56 lm/ft	378.56 lm/ft	619.56 lm/ft	378.56 lm/ft	619.56 lm/ft	378.56 lm/ft
Lumen Output / Meter	2032.16 lm/m	1241.68 lm/m	2032.16 lm/m	1241.68 lm/m	2032.16 lm/m	1241.68 lm/m
Total Lumens	609.8 lm	372.6 lm	1219.6 lm	745.2 lm	2439.2 lm	1490.4 lm
CRI	80+					
LED Binning SDCM	3-step					
Dimming Options	0-10V, Triac, DALI					
Ambient Temperature	-40° F to 122° F (-40° C to 50° C)					
Housing / Lens	Housing: Extruded Aluminum / Lens: UV Protected PMMA / Cover: Acrylic					
Connector	2 pin power connector					
Cable Length for 2 Pin Female to Bare Wire	11.81 in. (300 mm), 78.74 in. (2000 mm), 236.22 in. (6000 mm)					
Protection Rating	IP40 (Indoor only)					
UGR Rating	<7.8	<7.2	<7.8	<7.2	<7.8	<7.2
Mounting Options	Tilttable stand, Symmetric Clip, Quick Release Clip					
Fixture Color Finish	Black (Standard), Custom colors available (Minimum quantities apply)					
Certifications	ETL Listed: UL 2108 Issued: 2004/02/27 Ed: 1 Rev: 2014/02/24 Low Voltage Lighting Systems CSA C22.2#9.0 Issued: 1996/06/01 Ed: 1 (R2011) General Requirements for Luminaries; with Gen. Inst. 1: 1997, Gen Inst. 2: 1998. ROHS compliant					

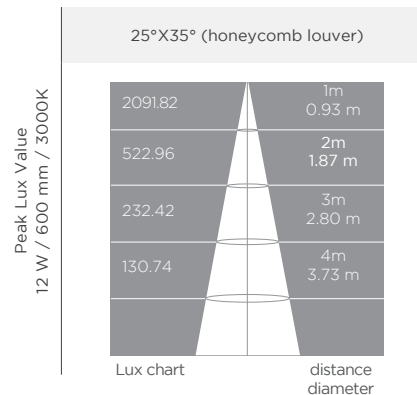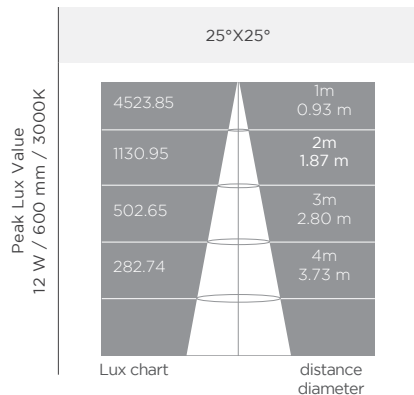


DIMENSIONS


Side View:  
11.8 in. / 300 mm:



Side View:  
23.6 in. / 600 mm:



Side View:  
47.2 in. / 1200 mm:




Acolyte does not warrant or represent that the information is free from errors or omission. The information may change without notice and Acolyte is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

DIMENSIONS / MOUNTING HARDWARE / ACCESSORIES

MOUNTING HARDWARE


**Tiltable Stand**

For adjustable mounting angles



**Symmetric Clip**


For narrow installations where mounting clips need to be installed first



0.78 in. L x 1.14 in. W x 0.72 in. H  
(19.8 L x 29.0 W x 18.3 H mm)

**Quick Release Clip**

For quick, one step release of fixture



1.18 in. L x 1.06 in. W x 0.72 in. H  
(30 L x 27 W x 18.29 H mm)

ACCESSORIES

**Symmetric Louver**


For glare reduction

Note: This will affect beam angle




Part Number: ATOMLOUV300  
ATOMLOUV600  
ATOMLOUV1200

Top View



Note: Not recommended for exterior applications


Side View



**Asymmetric Louver**


For glare reduction

Note: This will affect beam angle




Part Number: ATOMALOUV300  
ATOMALOUV600  
ATOMALOUV1200

Top View




Note: Not recommended for exterior applications

Side View



**Glare Shield**

To reduce glare or direct light



Glare shield is part of the extrusion and cannot be removed. It extends the entire length of the fixture.

**2 Pin Female Cable To Bare Wire**

To bare wire for incoming power


Default cable lengths:

11.81 in. / 300 mm, 78.74 in. / 2000 mm, 236.22 in. / 6000 mm  
(Consult factory for custom length)



Part Number: AtomCBLFB300  
AtomCBLFB2000  
AtomCBLFB6000

Ø 0.715 in.



**2 Pin Male To Female Jumper Cable**

To connect 2 pin male connector to 2 pin female connector

Default cable length:

11.81 in. / 300 mm, 23.62 in. / 600 mm, 70.87 in. / 1800 mm  
(Consult factory for custom length)




Part Number: ATOMJUMPMF300  
ATOMJUMPMF600  
ATOMJUMPMF1800


## CONNECTION

### NON DIMMING:


#### Case 1.

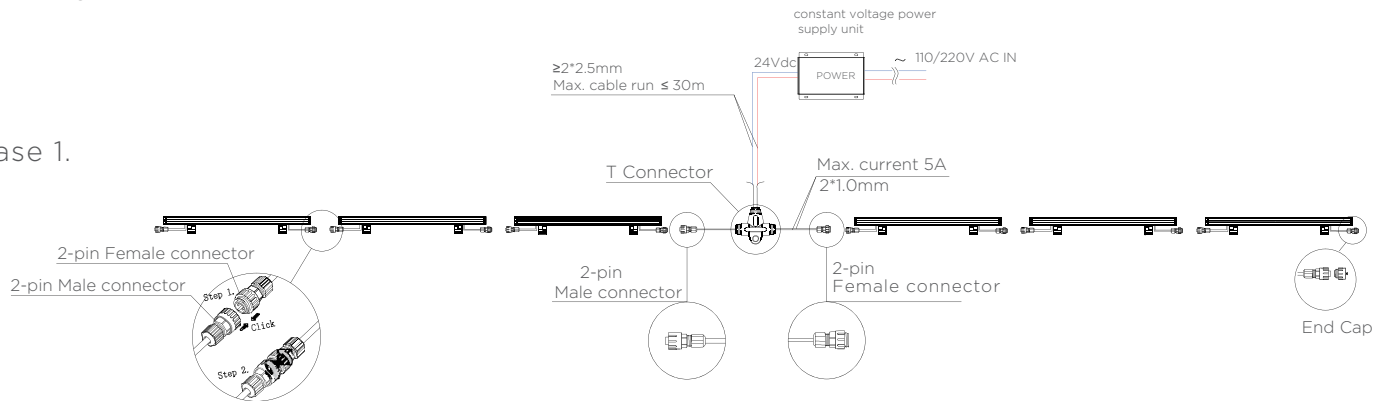

#### Case 2.

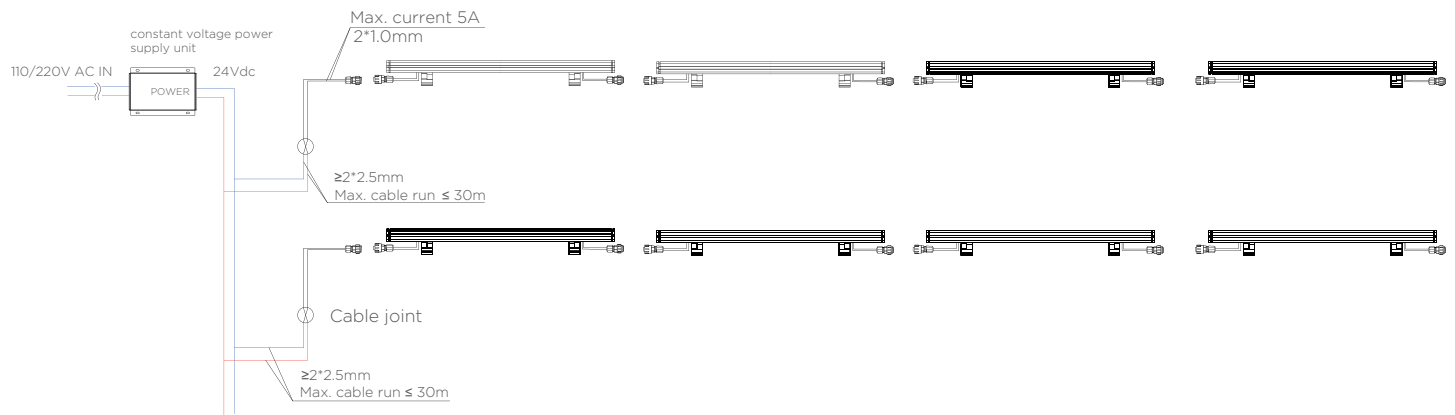


### 0-10V DIMMING:

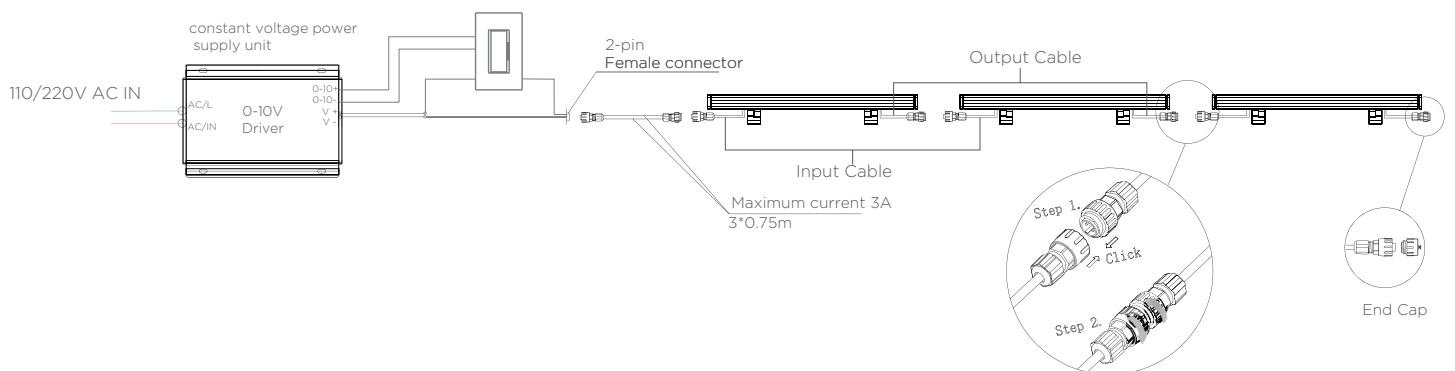


## CONNECTION

### DALI DIMMING:

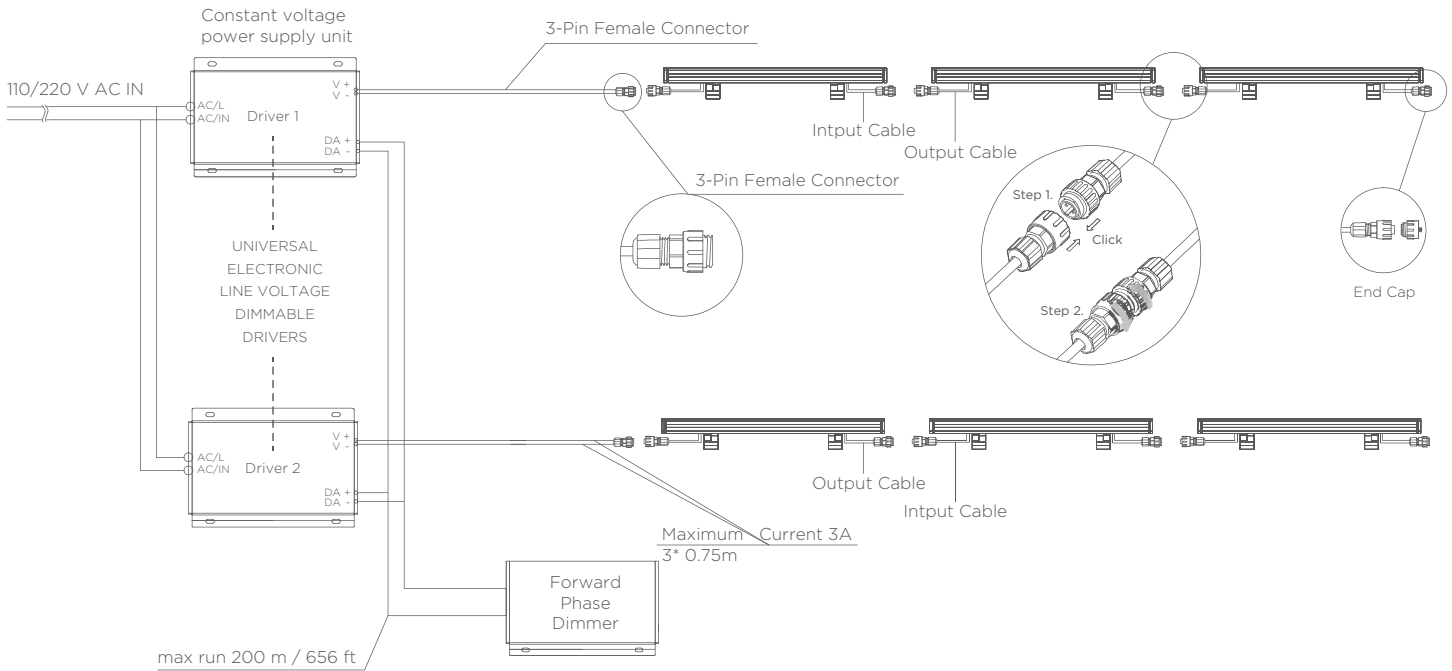

### TRIAC DIMMING:

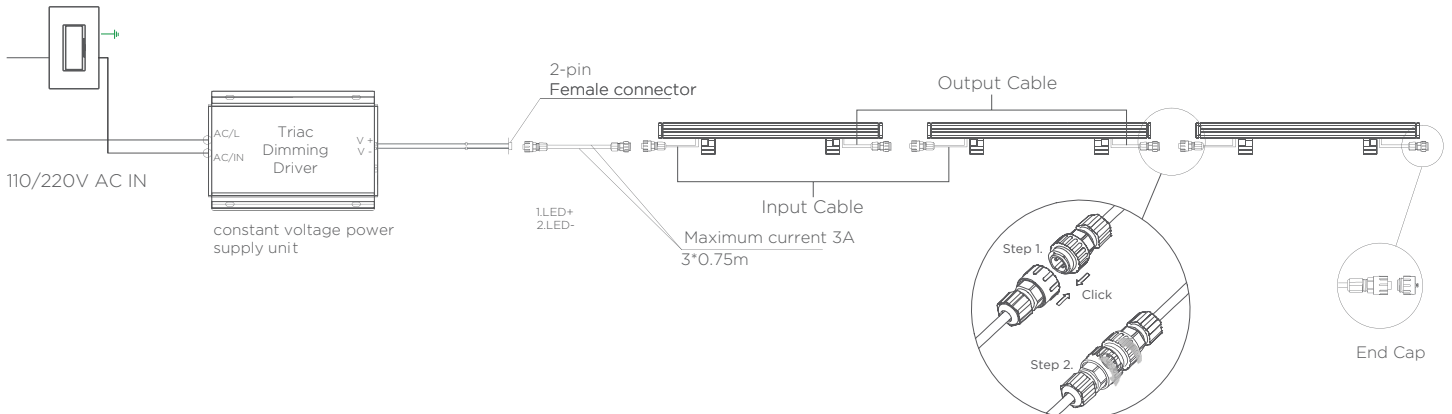

### CONNECTORS:

