


ARMOR SERIES | HEXANODE

Armor Series HexaNodes are versatile single-point source 24V RGB or RGBW fixtures that can be used to create a unique pixel display or to highlight architectural details. Program with simple SPI (Serial Peripheral Interface) controls for maximum effects. Each HexaNode module contains six LEDs (add two white LEDs for RGBW) for precise color gradients and smooth transitions. Choose from flat or globe lenses and customize your pixel spacing and quantity.

- Pinpoint lighting for custom façade displays
- RGB at 38 lm/node (all on)
- RGBW (2700K) at 50 lm/node (all on)
- Flat lens with 110x110° beam angle
- Globe lens with 160x160° beam angle
- Uses SPI controls
- Custom pixel spacing (starting at 3.94 in./100 mm)
- Replace single modules for easy maintenance
- Daisy chain up to 492 ft (150 m)
- Use with anodized mounting channel (up to 6 ft 6.74 in./2 m)
Powder coating available (extra charge)
- Single mounting clips
- IP67
- 5-year warranty
- Minimum Ordering Quantity: 50 modules
(HexaNode modules can be ordered in multiple strings.
MOQ can include strings with 2 different pitches.)

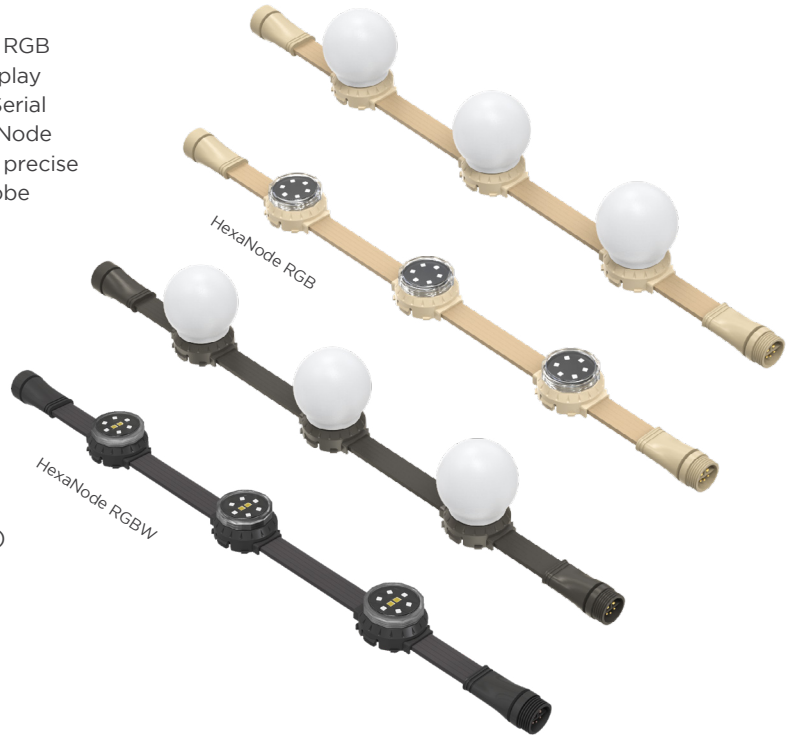

RoHS

IP67

AVAILABLE COLORS



RGB



RGBW (2700K)



Custom
Pixel Quantities
Per String



Custom
Spacing



Milky
Globe Lens



Clear
Flat Lens

ORDERING GUIDE

Category	Input Voltage	Wattage	Colors	Lens	Node Color	Control
NODE6	24					S
NODE6 - HexaNode	24 - 24 VDC	1.5 - 1.5 W (RGB)	RGB - RGB	CF - Clear Flat Lens	BK - Black	S - SPI
		2.0 - 2.0 W (RGBW)	RGB27 - RGBW (2700K)	GM - Milky Globe Lens	BG - Beige	

Note:

1. Specify spacing and quantity for custom mounting channel.
2. Be sure to use wire end caps at end of line.

ACCESSORIES:

1. M20E 5-Pin Female to Bare Wire Input Cable
M20CBLFB5PIN1000 (3 ft, 3.3 in. | 1 m)
M20CBLFB5PIN2000 (6 ft, 6.7 in. | 2 m)
M20CBLFB5PIN3000 (9 ft, 10 in. | 3 m)
2. M20E 5-PIN Male to Female Jumper Cable
M20JUMPMF5PIN1000 (3 ft, 3.3 in. | 1 m)
M20JUMPMF5PIN2000 (6 ft, 6.7 in. | 2 m)
M20JUMPMF5PIN3000 (9 ft, 10 in. | 3 m)
3. M20E 5-PIN Power Cable, Single Feed (59 in. | 1.5 m)
M20PYCBL5PIN1500
4. M20E 5-PIN Power Cable, Double Feed (59 in. | 1.5 m)
M20PYCBLD5PIN1500
5. M20E 5-PIN Power & Data Injector Cable (59 in. | 1.5 m)
M20YCBLP5PIN1500
6. M20E Input Cable, RJ45 to Female
M20CBLRJ45F5PIN15000 (49 ft | 15 m)
M20CBLRJ45F5PIN30000 (98 ft | 30 m)
M20CBLRJ45F5PIN50000 (164 ft | 50 m)
7. End Cap
M20EC5PIN
8. Mounting Clip
NODEMC
9. Mounting Channel (up to 78.74 in. | 2 m)
CHNODESV

CONTROLLERS:

1. C4 Extended Controller
Part # for 1 universe model: CTRLPIXEL1
Part # for 2 universe model: CTRLPIXEL2
Part # for 4 universe model: CTRLPIXEL4
Part # for 8 universe model: CTRLPIXEL8
2. C4 Live Controller
Part # for 4 universe model: CTRLPIXELLIVE4
Part # for 8 universe model: CTRLPIXELLIVE8
Part # for 12 universe model: CTRLPIXELLIVE12
Part # for 16 universe model: CTRLPIXELLIVE16
Part # for 24 universe model: CTRLPIXELLIVE24
3. PxLNet Controller
Part #: CTRLPIXEL96


DRIVERS:

1. 24V 60W Non-dimmable Driver
Part #: DRVW2460
2. 24V 96W Non-dimmable Driver
Part #: DRVW2496

SPECIFICATIONS / DIMENSIONS / LUMEN DATA

Operating Voltage	24 VDC			
Color / Temperature	RGB		RGBW (2700K)	
Power Consumption	1.5 W		2.0 W	
Lumens per Node	38 lm		50 lm	
LEDs per Node	6 LEDs		8 LEDs (6x RGB + 2x White)	
IC Code	16-bit (Default) UCS8903	8-bit (Optional) UCS2903	16-bit (Default) UCS8904	8-bit (Optional) UCS2904
LED Beam Angle	Clear Flat Lens: 110x110° Milky Globe Lens: 160x160°			
Max Run Length	475 ft 8.66 in. (145 m)			
LED Pitch	Customizable, starting from 3.94 in. (100mm)			
Max. Daisy Chain Connections	492 ft 1.51 in. (150 m) including extension cables			
Minimum Order Quantity	Minimum Ordering Quantity: 50 modules (HexaNode modules can be ordered in multiple strings. MOQ can include strings with 2 different pitches.)			
Storage Temperature	-22 — 176 °F (-30 — 80 °C)			
Operating Temperature	-4 — 158 °F (-20 — 70 °C)			
Connector	5-pin Connector			
Lens Options	Clear Flat Lens Cap, Milky Globe Lens Cap			
Protection Rating	IP67			
Mounting Options	Screw-in Mounting Base, Mounting Channel			
Certifications	ETL, CE, RoHS			
Fixture Color Finish	Black, Beige			
Dimensions (W x H)	1.65 x 0.87 in. (42 x 22 mm)			
Weight per Node	0.64 oz. (18 gm)			
Warranty	5 years			


DIMENSIONS

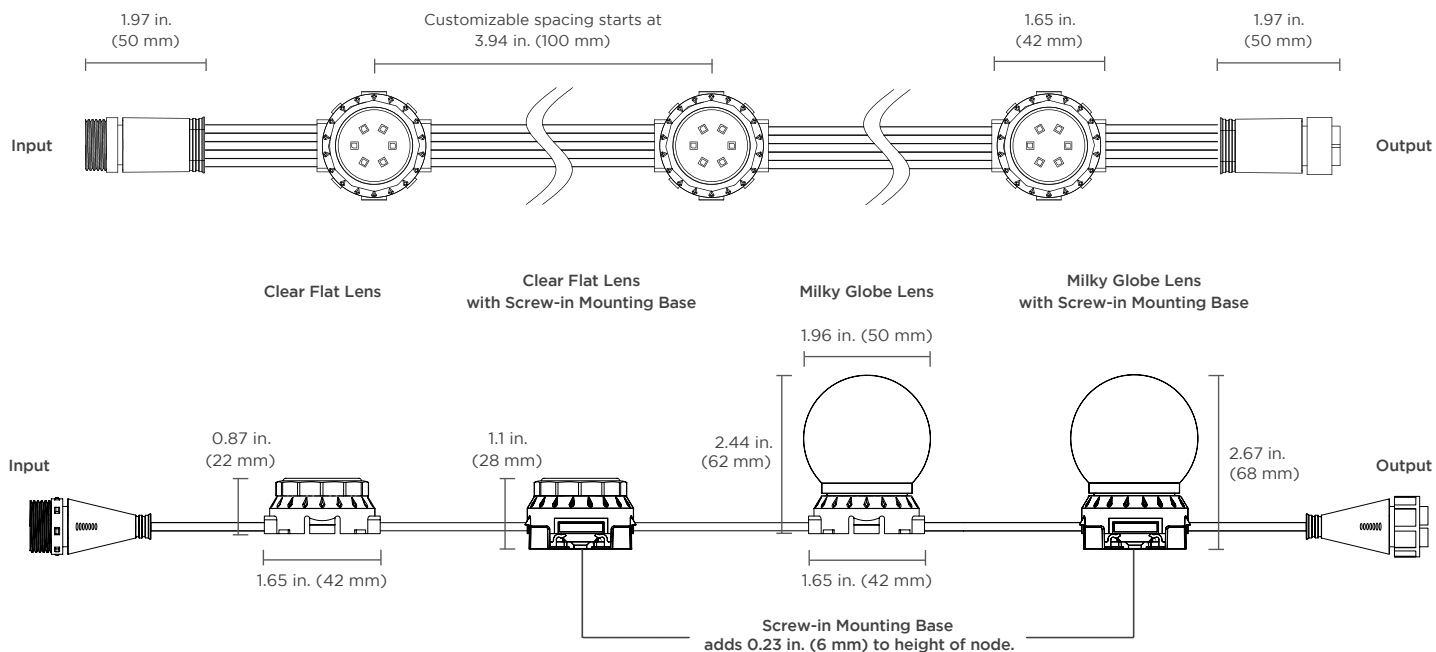


MOUNTING HARDWARE

MOUNTING CHANNEL (PART #: CHNODESV)

Mounting Channel length up to 78.74 in. (2 m)

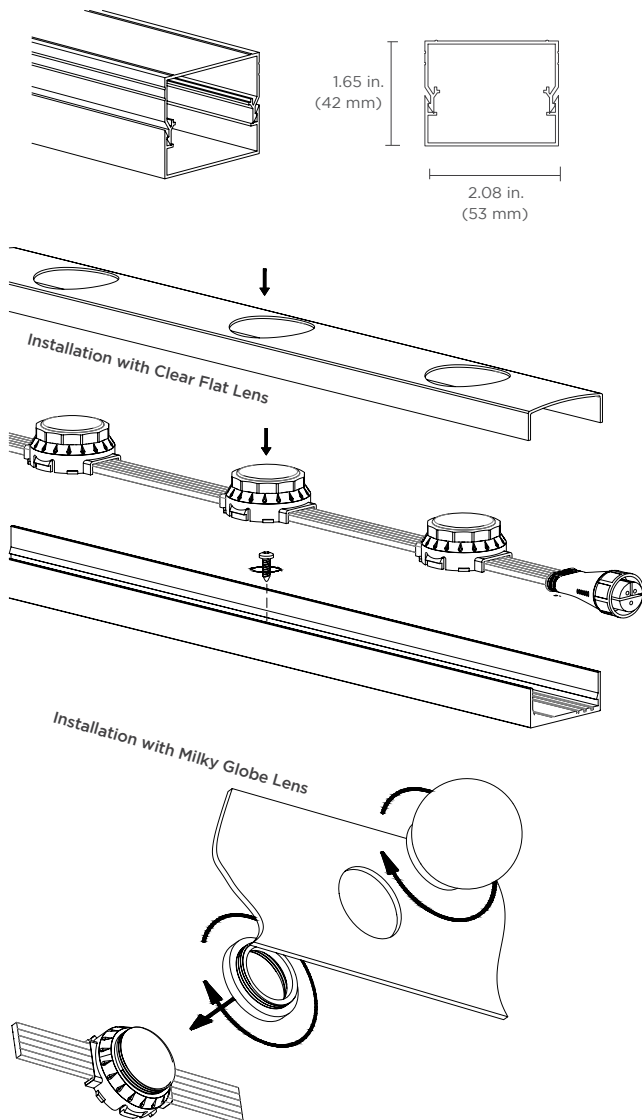


SCREW-IN MOUNTING BASE (PART #: NODEMC)

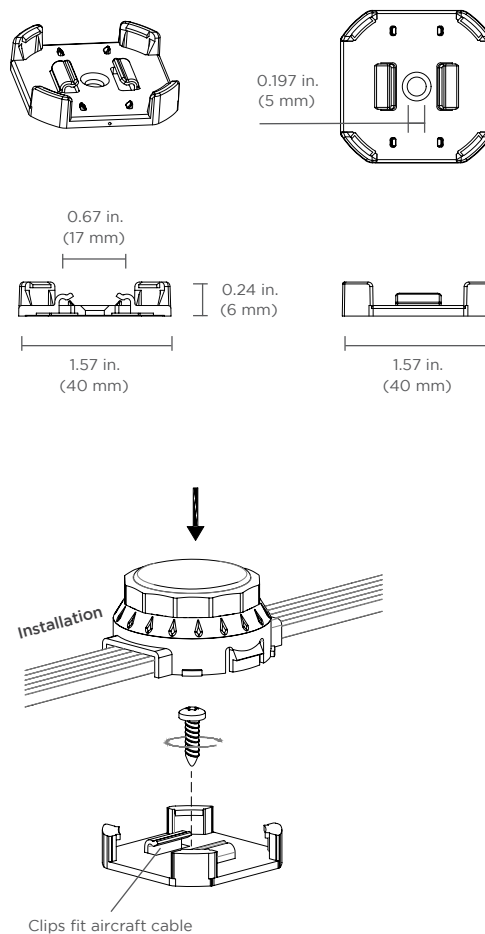

ACCESSORIES


M20E 5-PIN MALE TO FEMALE JUMPER CABLE

Part #:
M20JUMPMF5PIN1000 (3 ft 3.3 in. | 1 m)
M20JUMPMF5PIN2000 (6 ft 6.7 in. | 2 m)
M20JUMPMF5PIN3000 (9 ft 10 in. | 3 m)

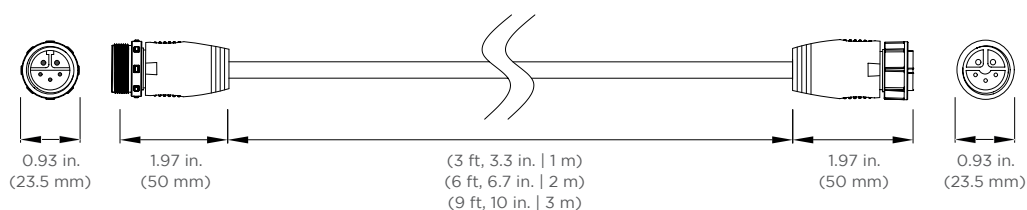

END CAP

Part #: M20EC5PIN




ACCESSORIES

M20E 5-PIN POWER CABLE, SINGLE FEED

Part #:


M20PYCBL5PIN1500 (59 in. | 1.5 m)

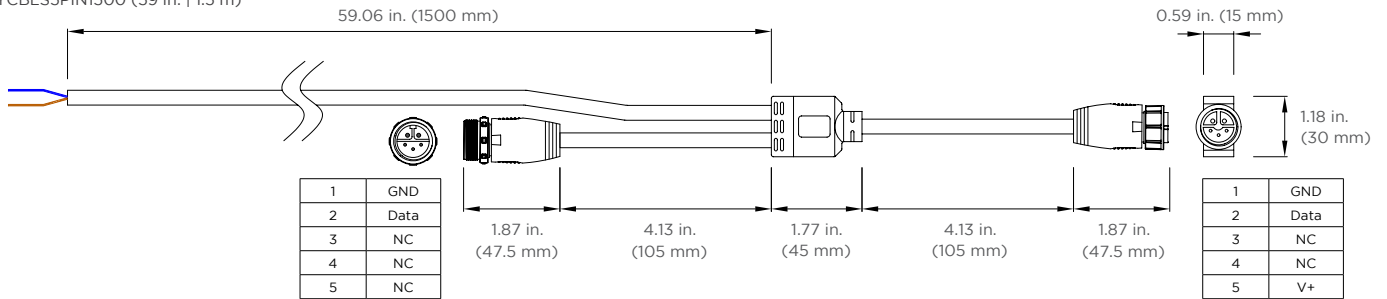

M20E 5-PIN POWER CABLE, DOUBLE FEED

Part #:


M20PYCBLD5PIN1500 (59 in. | 1.5 m)

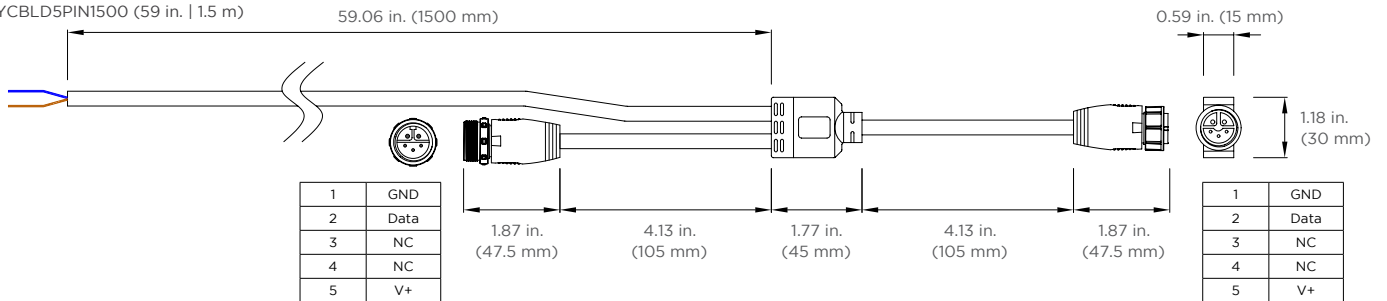

M20E 5-PIN POWER & DATA INJECTOR CABLE

Part #:

M20YCBLP5PIN1500 (59 in. | 1.5 m)

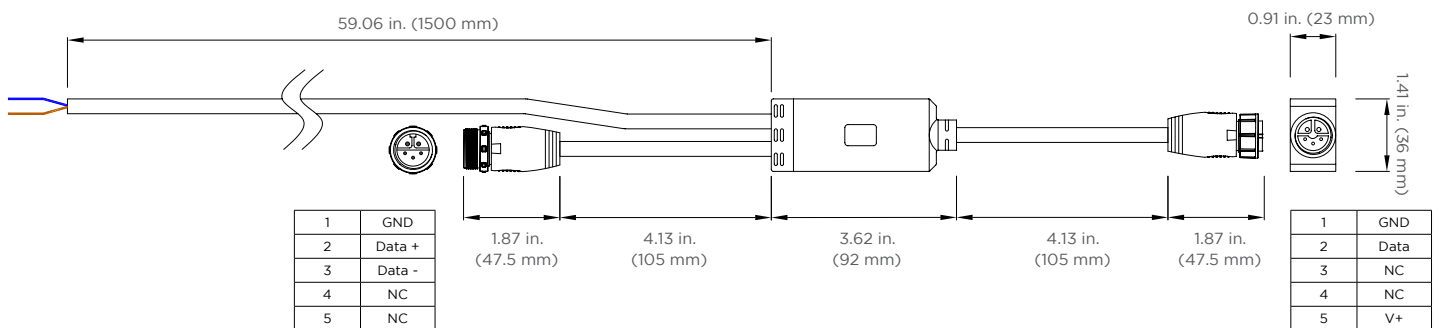

M20E 5-PIN INPUT CABLE, RJ45 TO FEMALE


Part #:

M20CBLRJ45F5PIN15000 (49 ft | 15 m)

M20CBLRJ45F5PIN30000 (98 ft | 30 m)

M20CBLRJ45F5PIN50000 (164 ft | 50 m)


RJ45		
1	Orange/White	Data +
2	Orange	Data -
3	Green/White	Not used
4	Blue	Not used
5	Blue/White	Not used
6	Green	Not used
7	Brown/White	GND
8	Brown	GND

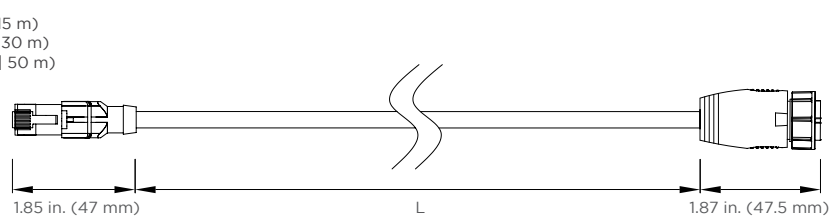


M20E 5-Pin Female		
1	GND	
2	Data -	
3	Data +	
4	NC	

CONNECTION

Basic - Power from middle

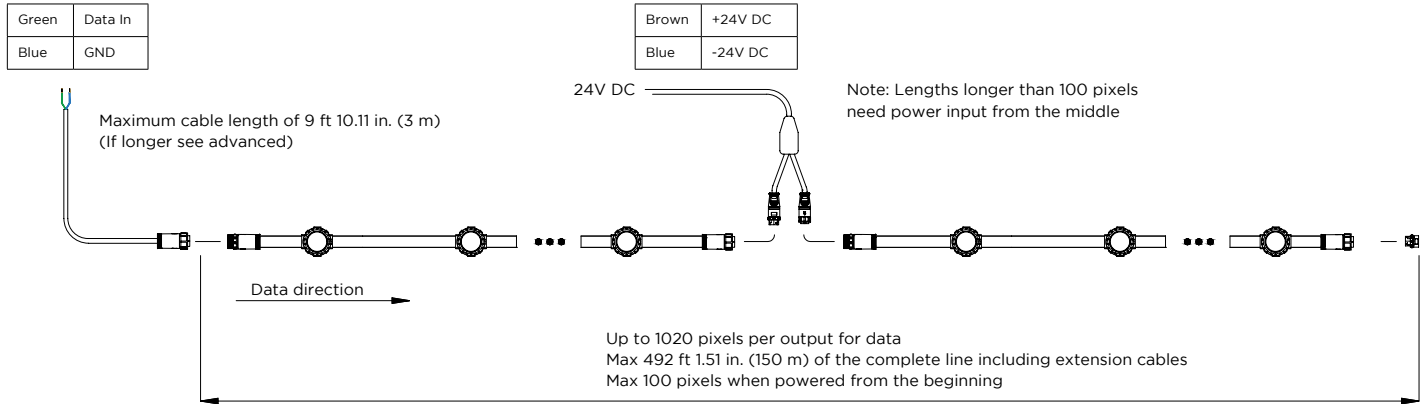


Basic - Power from beginning

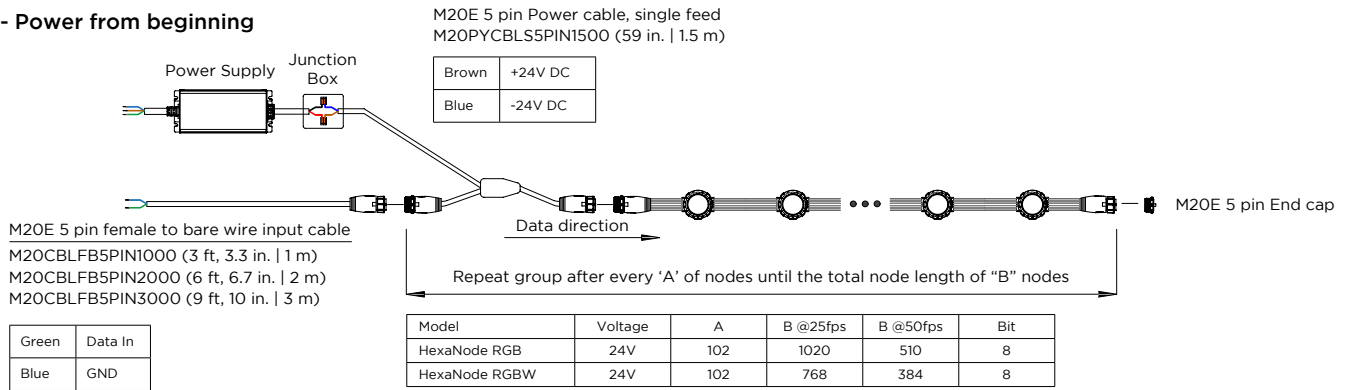

CONNECTION

Advanced

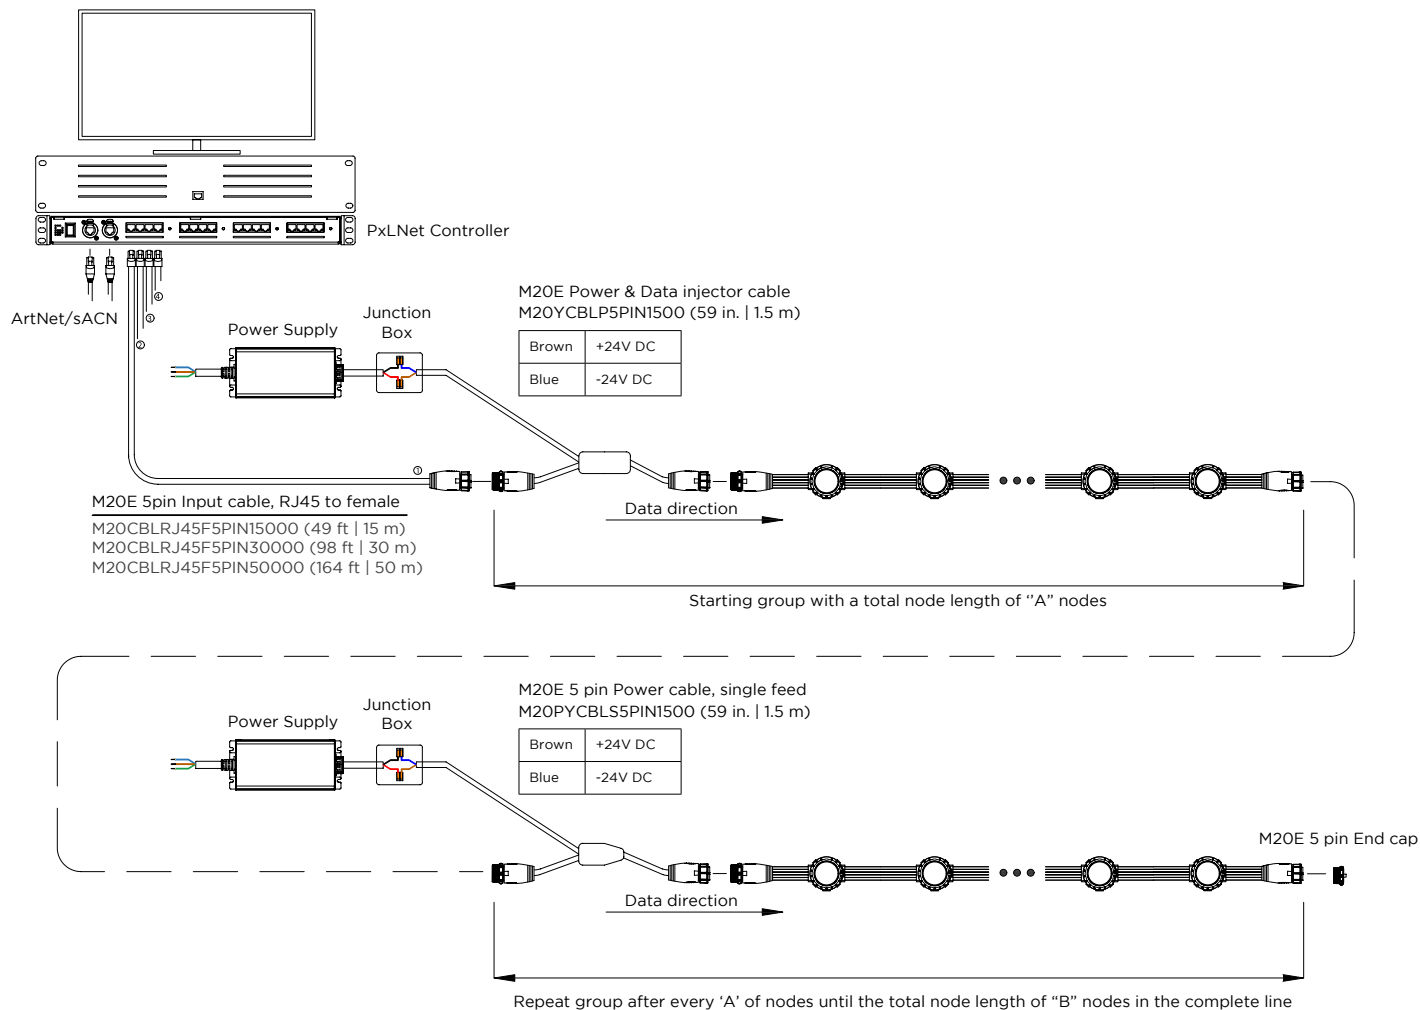

Model	Voltage	A	B @25fps	B @50fps	Bit
HexaNode RGB	24V	102	1020	510	8
HexaNode RGBW	24V	102	768	384	8

Default nodes per string: 34 nodes (Customizable)
Default spacing: 7.87 in. / 200 mm (Customizable)

REV.17JUN2025

GLOBAL HQ

320 Murray Hill Pkwy
East Rutherford, NJ 07073
U.S.
T: (+1) 212 629 6830
E: Sales-US@GENLEDBrands.com

EUROPEAN HQ

Hogeweyselaan 119
1382 JK Weesp
Netherlands
T: (+31) 346 235 000
E: SalesEurope@GENLEDBrands.com

MEINA HQ

PO Box 371378, #823, Building 4EA
Dubai Airport Free Zone
Dubai, UAE
T: (+971) 4 701 7901
E: SalesMEINA@genledbrands.com

ASIA-PACIFIC HQ

Room 402, Building D
Shenshi Tongchuang Science and Technology Park
No. 16 Hongyin Road
Xingqiang Community, Xinhui Street
Guangming District, Shenzhen, China 518107
T: (+86) 755 8529 0710
E: Sales-Pacific@GENLEDBrands.com