



# NANO FLEX

## DUAL-BENDING WALL GRAZER

The Nano Flex is a flexible silicone grazer tube with three beam angle options. Available in five dimmable Static White CCTs (1800K-6500K), this IP68 grazer is compatible with 0-10V, ELV/MLV or DMX controls. Dual bending capabilities (side- and top-bending!) make this an amazing solution for complex grazer applications.

### FEATURES:

- 5.5 W/ft (18 W/m)
- 5 Static White CCTs (1800K, 2700K, 3000K, 4000K, 6500K)
- 0-10V, ELV/MLV or DMX controls
- 7 LEDs/ft (24 LEDs/m)
- 1.65 in. (42 mm) LED spacing
- 10 in. (250 mm) cut lengths
- 16 ft 4 in. (5 m) max. length (single feed)
- 3 in. (75 mm) min. side bending radius
- 3.5 in. (90 mm) min. top bending radius
- Beam angles: 15°x15°, 38°x38°, 60°x60°
- 80+ CRI with IP68 and IK08 ratings
- Available in white or black


### MOUNTING OPTIONS




Mounting Clip



Mounting Channel



Curved Mounting Channel  
(for side bending applications only)

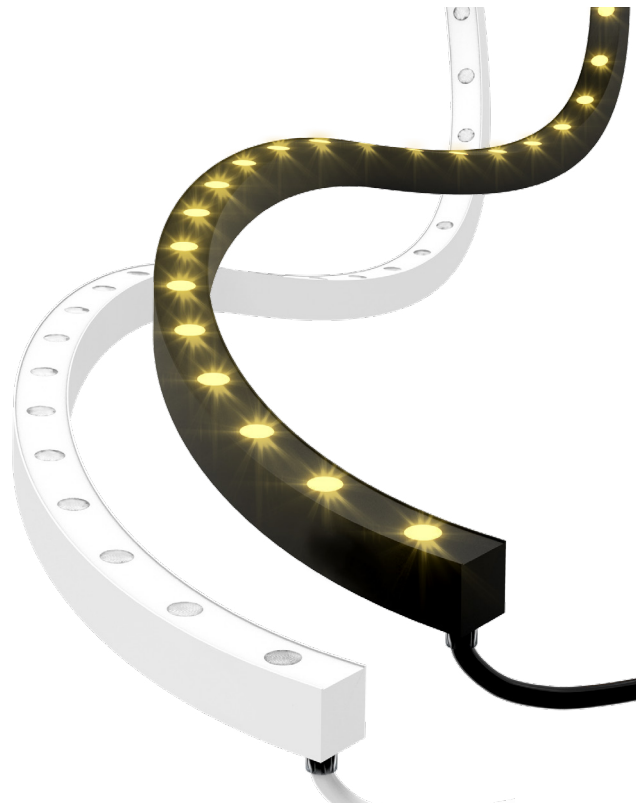

RoHS

IP68

IK08

### COLOR TEMPERATURES



1800K 2700K 3000K 4000K 6500K

### BASE COLORS



Black White

### BEAM ANGLES



15°x 15° 38°x 38° 60°x 60°

REV. 29OCT2024