



4 ZONE COLOR CHANGING GLASS TOUCH WALL CONTROLLER

The 4 Zone Color Changing Glass Touch Wall Controller manages 4 or 5 channels for RGBW and RGBA lighting from an elegant touch-sensitive display. It runs 4 zones with DMX512 output protocols (wireless Bluetooth 5.0 optional). Program and save unique transitions, rolls and fades with ease with 4 scene keys, 4 zone keys, a touch color circle and a touch slider.

- Simple control for RGBW and RGBA
- 4 zones / 4 scenes
- 12-24 V DC input
- 1 universe / 512 DMX channels
- DMX512 output protocol (Bluetooth 5.0 optional)
- Touch color circle and slider bar
- Easily adjust speed and brightness




Applications:

| | | |
|---------------|---------------|-------------|
| Commercial | Hospitality | Residential |
| Entertainment | Museums | Retail |
| Healthcare | Public Spaces | |



RoHS

DIMENSIONS



Width: 2.95 in (75 mm)
Length: 4.72 in (120 mm)
Depth: 1.16 in (29.5 mm)

ORDERING GUIDE

STANDARD

Category


AWCRGBWWBK

AWCRGBWWBK - 4 Zone Color Changing Glass Touch Wall Controller

AgiLight does not warrant or represent that the information is free from errors or omission. The information may change without notice and AgiLight is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.




FEATURES

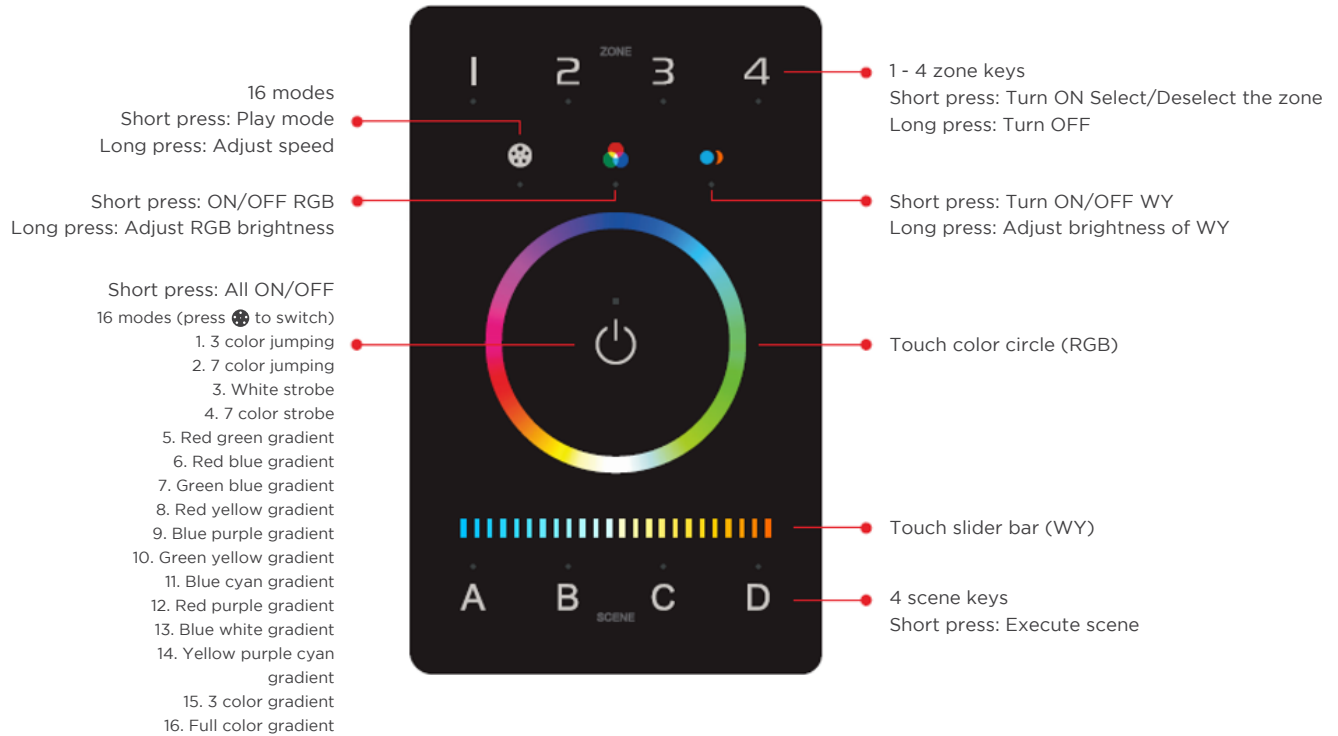

SPECIFICATIONS / DIMENSION DRAWING

| TECHNICAL DATA | |
|-------------------|---|
| Input Power | 12-24V DC |
| Output Protocol | DMX512 |
| Wireless Protocol | Bluetooth 5.0 SIG Mesh |
| Available Colors | Black |
| Zones | 4 |
| Temperature | 14° - 113° F (-20° - 55° C) |
| Dimensions | 2.95 x 4.72 x 1.16 in. (75 x 120 x 29.5 mm) |
| Weight | 0.5 lb (225 g) |
| Standards | UL, RoHS, FCC, CE |

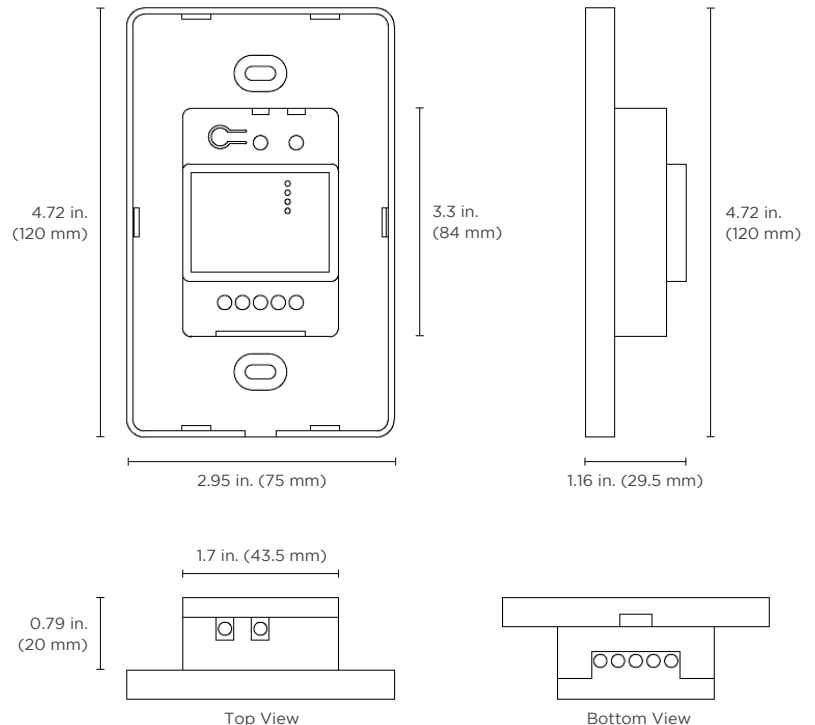

AgiLight does not warrant or represent that the information is free from errors or omission. The information may change without notice and AgiLight is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.



WIRING DIAGRAM

