

4 ZONE COLOR CHANGING GLASS TOUCH WALL CONTROLLER

The 4 Zone Color Changing Glass Touch Wall Controller manages 4 or 5 channels for RGBW and RGBA lighting from an elegant touch-sensitive display. It runs 4 zones with DMX512 output protocols (wireless Bluetooth 5.0 optional). Program and save unique transitions, rolls and fades with ease with 4 scene keys, 4 zone keys, a touch color circle and a touch slider.

- Simple control for RGBW and RGBA
- 4 zones / 4 scenes
- 12-24 V DC input
- 1 universe / 512 DMX channels
- DMX512 output protocol (Bluetooth 5.0 optional)
- Touch color circle and slider bar
- Easily adjust speed and brightness




Applications:

| | | |
|---------------|---------------|-------------|
| Commercial | Hospitality | Residential |
| Entertainment | Museums | Retail |
| Healthcare | Public Spaces | |



DIMENSIONS



Width: 2.95 in (75 mm)
Length: 4.72 in (120 mm)
Depth: 1.16 in (29.5 mm)

ORDERING GUIDE

STANDARD

Category

AWCRGBWWBK

AWCRGBWWBK - 4 Zone Color Changing Glass Touch Wall Controller

AgiLight does not warrant or represent that the information is free from errors or omission. The information may change without notice and AgiLight is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

GLOBAL HQ

320 Murray Hill Pkwy
 East Rutherford, NJ 07073
 U.S.
 T: (+1) 212 629 6830
 E: Sales-US@GENLEDBrands.com

EUROPEAN HQ

Hogeweyselaan 119
 1382 JK Weesp
 Netherlands
 T: (+31) 346 235 000
 E: SalesEurope@GENLEDBrands.com

MEINA HQ


PO Box 371378, #823, Building 4EA
 Dubai Airport Free Zone
 Dubai, UAE
 T: (+971) 4 701 7901
 E: SalesMEINA@genlebrands.com

ASIA-PACIFIC HQ

Room 402, Building D
 Shenshi Tongchuang Science and Technology Park
 No. 16 Hongyin Road
 Xingqiang Community, Xinhua Street
 Guangming District, Shenzhen, China 518107
 Sales: (+86) 139 1836 3905
 Office: (+86) 755 8529 0710
 E: Sales-Pacific@GENLEDBrands.com




FEATURES

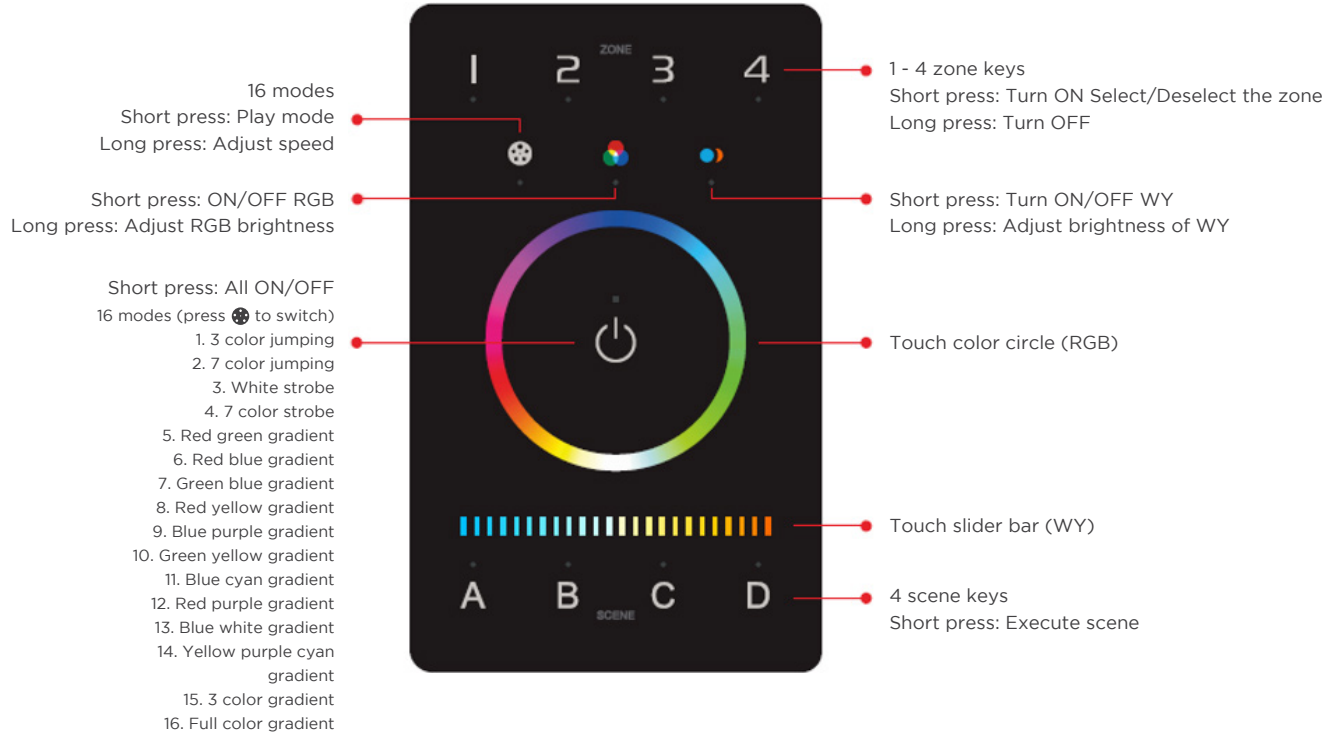

SPECIFICATIONS / DIMENSION DRAWING

| TECHNICAL DATA | |
|-------------------|---|
| Input Power | 12-24V DC |
| Output Protocol | DMX512 |
| Wireless Protocol | Bluetooth 5.0 SIG Mesh |
| Available Colors | Black |
| Zones | 4 |
| Temperature | 14° - 113° F (-20° - 55° C) |
| Dimensions | 2.95 x 4.72 x 1.16 in. (75 x 120 x 29.5 mm) |
| Weight | 0.5 lb (225 g) |
| Standards | UL, RoHS, FCC, CE |

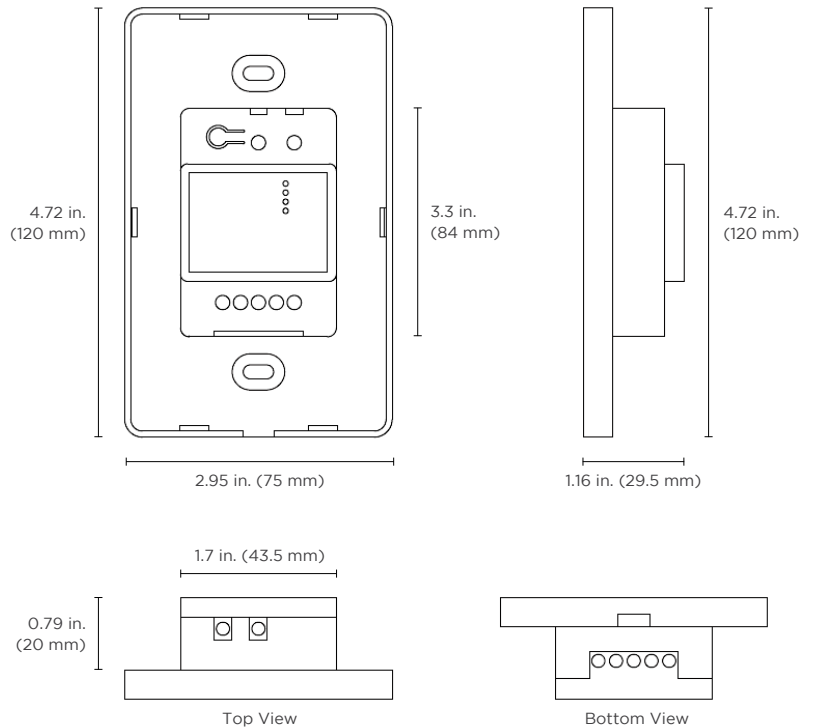

AgiLight does not warrant or represent that the information is free from errors or omission. The information may change without notice and AgiLight is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.



WIRING DIAGRAM

