


### OPTX RIBBONLYTE

OptX RibbonLyte is a flexible wall washing or grazing solution that doesn't require a channel fixture. Available in four Static White CCTs (2700-4000K), our 24V OptX RibbonLyte offers the choice of symmetric 10° and 30° beam angles. It is rated IP67 for outdoor use. Mounting options include several types of mounting clips and channels.

- 5.8 W/ft (19 W/m)
- 2 beam angle options:  
10°: 85 lm/W, 510 lm/ft (1672.8 lm/m)  
30°: 100 lm/W, 600 lm/ft (1968 lm/m)
- 14 LEDs/ft (46 LEDs/m)
- 90+ CRI with an IP67 rating
- 5.91 in. (150 mm) minimum bending radius
- 3-year warranty

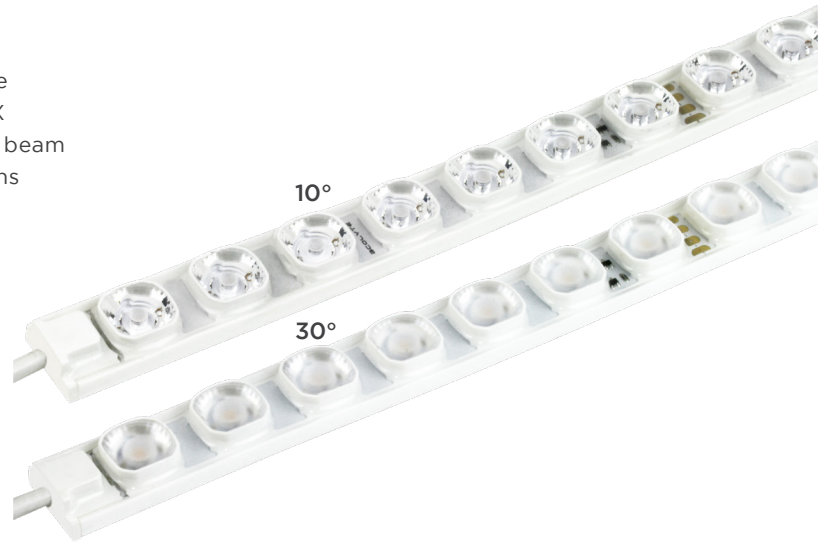

### ORDERING GUIDE

Category	CRI	Ribbon Type	IP Rating	Wattage	Color Temperature	Beam Angle
<b>RB</b>	<b>90</b>	<b>SWX</b>	<b>67</b>	<b>5.8</b>		
<b>RB - RibbonLyte</b>	<b>90 - 90+ CRI Static White</b>	<b>SWX - Static White OptX</b>	<b>67 - IP67</b>	<b>5.8 - 5.8 W/ft (19 W/m)</b>	<b>27 - 2700K</b>	<b>10 - 10°</b>
					<b>30 - 3000K</b>	<b>30 - 30°</b>
					<b>35 - 3500K</b>	
					<b>40 - 4000K</b>	

### OPTIONAL ACCESSORIES (more details on page 3)

1.) **Strip Mounting Clip** (1 per 1 ft / 3 per 1 m)  
Part #: CHASXCLIPSV

2.) **0.67 in. VHB Tape**  
Part #: VHBTAPE0.67BK

3.) **Symmetric Aluminum Channel**  
Silver Channel Part #: CHASXSVA  
Black Channel Part #: CHASXBKA  
Clear Lens Part #: CHASXLENSC  
Symmetric Channel Mounting Clip (1 per 2 ft / 2 per 1 m)  
Part #: CHASXBCLIPSV  
Symmetric Channel Adjustable Mounting Clip (1 per 2 ft / 2 per 1 m)  
Part #: CHASXABCLIPSV  
Channel Coupler (for fixtures longer than 78.74 in. / 2 m)  
Part #: CHASXSTR8SV

4.) **Aluminum Glare Shield Channel**  
Silver Channel Part #: CHASXASV  
Black Channel Part #: CHASXABK  
Asymmetric Channel Mounting Clip (1 per 2 ft / 2 per 1 m)  
Part #: CHASXBCLIPASV  
Asymmetric Channel Adjustable Mounting Clip (1 per 2 ft / 2 per 1 m)  
Part #: CHASXAABCLIPSV  
Channel Coupler (for fixtures more than 78.74 in. / 2 m in length)  
Part #: CHASXASTR8SV

### CONNECTION OPTION

**End Feed Bare Wire Connection**




**Standard cable length if not specified:**  
12 in. (304.8) mm cable with bare wire  
(custom length up to 20 ft / 6 m)

### ASSEMBLY OPTION

**Factory Assembly**  
Available for fixtures up to 78.74 in. (2 m) long

### AVAILABLE COLOR TEMPERATURES




**SPECIFICATIONS**

OptX RibbonLyte	
Operating Voltage	24 V
LED Pitch	14 LEDs/ft (46 LEDs/m)
Protection Rating	IP67
Dimming/Control	0-10 Volt / ELV / MLV / DMX / DALI
Operating Temperature	-4 – 131 °F (-20 – 55 °C)
Color Temperatures	2700K, 3000K, 3500K, 4000K
Power Consumption	5.8 W/ft (19 W/m)
Beam Angles	10°   30°
Lumen Output	510 lm/ft (1672.8 lm/m)   600 lm/ft (1968 lm/m)
Lumens/Watt	85 lm/W   100 lm/W
MacAdam Ellipses (SDCM)	SDCM < 3
Lifetime (L70 reported)	60,000 hours
Cutable Length	5.91 in. (150 mm) Not Field Cutable
Max Run Length	32 ft (9.8 m)
CRI	90+ CRI
Min. Bend Radius	5.91 in. (150 mm)
Certifications	UL, CE, RoHS
Warranty	3 years

**DIMENSIONS**


10° and 30°

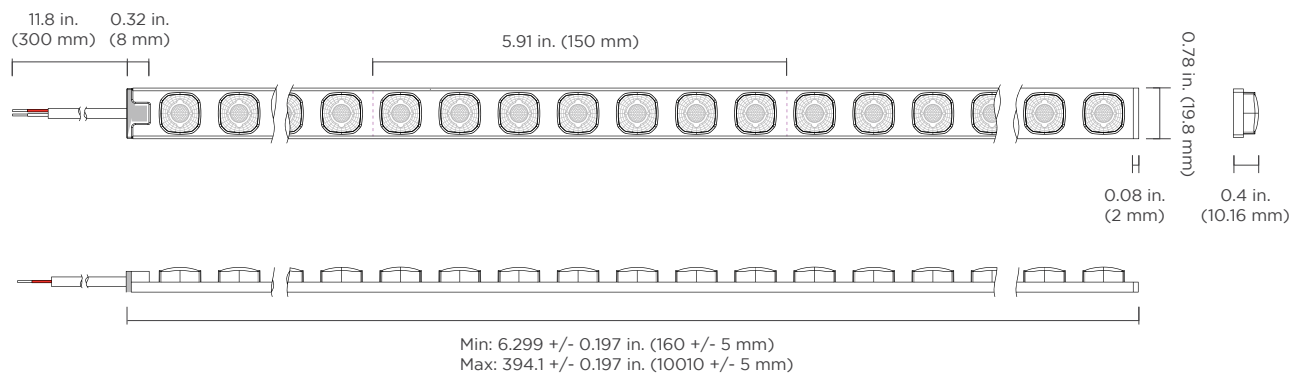

ACCESSORIES


**Aluminum Glare Shield Channel**

Silver Channel Part Number: CHASXASV  
Black Channel Part Number: CHASXABK



**Symmetric Aluminum Channel**

Silver Channel Part Number: CHASXSVA  
Black Channel Part Number: CHASXBKA  
Clear Lens Part Number: CHASXLENSC



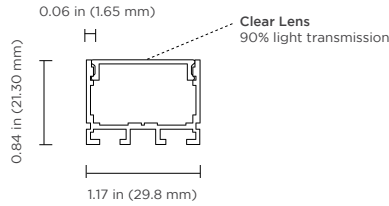


**0.67 in. VHB Tape (Part Number: VHBTAPE0.67BK)**






Provides superior holding power in surface mounted applications. VHB Tape is NOT for use in channel applications.




**Strip Mounting Clip - Part Number: CHASXCLIPSV**






**Mounting Clip for Glare Shield Channel - Part Number: CHASXBCLIPASV (1 per 2 ft / 2 per 1 m)**






**Adjustable Mounting Clip for Glare Shield Channel - Part Number: CHASXAABCLIPSV (1 per 2 ft / 2 per 1 m)**



**Symmetric Channel Mounting Clip - Part Number: CHASXBCLIPSV (1 per 2 ft / 2 per 1 m)**




**Symmetric Channel Adjustable Mounting Clip - Part Number: CHASXABCLIPSV (1 per 2 ft / 2 per 1 m)**




**BEAM ANGLE DIAGRAMS**

**10° at 3000K**

Luminous Intensity Distribution Curve

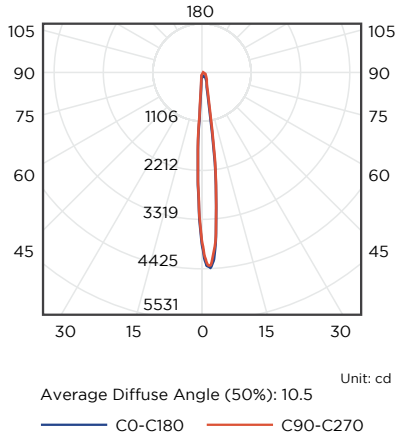


Illuminance at a Distance

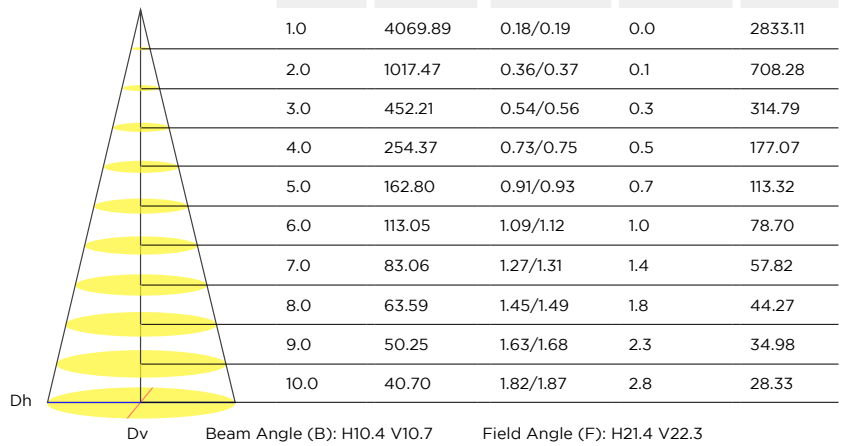


**30° at 3000K**

Luminous Intensity Distribution Curve

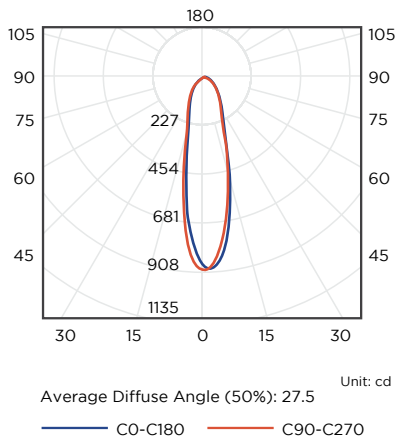

Illuminance at a Distance

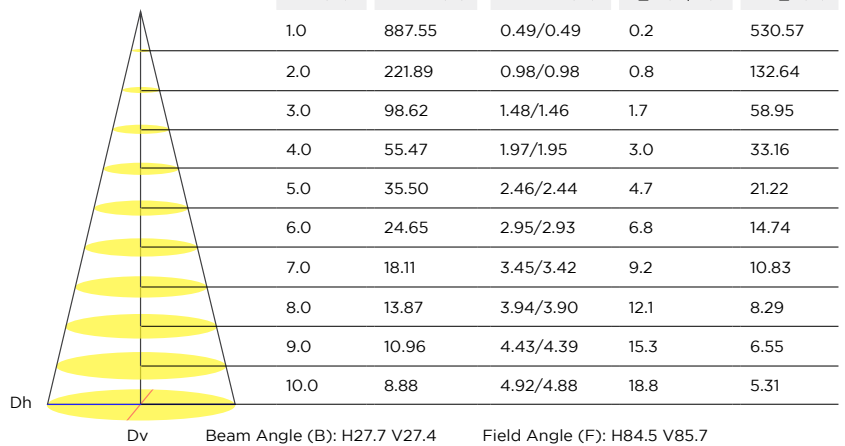

WIRING DIAGRAMS

**0-10V**

**MLV / ELV**

**DMX**

**WIRE COLORS PER RIBBONLYTE COLOR**

STATIC WHITE  
Red Wire (+) Positive  
Black Wire (-) Negative

POWER SUPPLY LOADING

Power Supply	Max Recommended Single Run	
	Wattage	Feet
60	9	2.7
96	14.4	4.4
150	22.5	6.9
300	32	9.8

USAGE GUIDELINES

- IP67 RibbonLyte are not field cuttable. All custom cuts and connections for these models must be performed at the factory to ensure waterproofing standards are met. Any modification of this on the field or by end user will result in a voided warranty.
- When installing this product take into account the surface temperature of the material this product is mounted to. Many building surfaces which are exposed to direct sunlight exceed the 55 °C / 131 °F maximum that our product is rated for. High risk locations like this should be avoided.
- Our IP67 can be used in wet, outdoor locations around swimming pools and spa tubs, but our products are not intended to be submerged in pools and fountains and do not carry UL676 certification to do so.
- Please refer to our RibbonLyte Proper Use Guide in our *Application Guide* for more information. Available for download at [www.GENLEDBrands.com/Acolyte](http://www.GENLEDBrands.com/Acolyte).
- Compatible with a wide variety of control products including the entire line of Lutron dimming systems.
- For use with Acolyte drivers, 0-10V dimming modules and interface controllers (DMXINF models).
- Use with non-Acolyte supplied Triac, MLV or ELV drivers is not supported or warranted.
- Due to the nature of the product, RibbonLyte cuttable lengths are generally longer or shorter than the customer requested length. Unless specified, RibbonLyte is factory cut at the shorter cuttable point.
- We reserve the right to make changes to product lineup, specifications, design and finishes at any time without notice.

Acolyte does not warrant or represent that the information is free from errors or omission. The information may change without notice and Acolyte is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

REV.17APR2025

<p><b>GLOBAL HQ</b> 320 Murray Hill Pkwy East Rutherford, NJ 07073 U.S. T: (+1) 212 629 6830 E: Sales-US@GENLEDBrands.com</p>	<p><b>EUROPEAN HQ</b> Hogeweyselaan 119 1382 JK Weesp Netherlands T: (+31) 346 235 000 E: SalesEurope@GENLEDBrands.com</p>	<p><b>MEINA HQ</b> PO Box 371378, #823, Building 4EA Dubai Airport Free Zone Dubai, UAE T: (+971) 4 701 7901 E: SalesMEINA@genledbrands.com</p>	<p><b>ASIA-PACIFIC HQ</b> Room 402, Building D Shenshi Tongchuang Science and Technology Park No. 16 Hongyin Road Xingqiang Community, Xihu Street Guangming District, Shenzhen, China 518107 T: (+86) 755 8529 0710 E: Sales-Pacific@GENLEDBrands.com</p>
---	--	---	--