

# 12V ULTRA Lyte

**BEST IN CLASS BRIGHTNESS & EFFICACY | CONSTANT CURRENT**

**CONTINUOUS RELEASE LINER**  
REDUCES INSTALLATION TIME BY 30%

Great for channel letters, box signs or cove and accent lighting, ULTRA Lyte modules feature a 12V true IC constant current design that maintains brilliant light across each string. With an IP67 rating and a seven-year warranty, ULTRA Lyte modules allow speedy installation with a convenient continuous release liner for the mounting tape. ULTRA Lyte static white modules offer three module designs (ULTRA Lyte 1, ULTRA Lyte 2, ULTRA Lyte 3) engineered with unique spacing available in three CCTs (5000K, 6500K, 7100K). ULTRA Lyte 2 Color modules are available in three static colors.



12V DC



**IP67**



7 YEAR LIMITED WARRANTY

## FEATURES

Module	Module Spacing	Number of Modules	Wattage per Module	Nominal Light Output	Input Current
ULTRA Lyte 1	4.92 in. 125 mm	2.44 per ft (8 per m)	0.36/W Nominal	61 lm/module	0.030 A/Module
ULTRA Lyte 2	7.09 in. 180 mm	1.69 per ft (5.56 per m)	0.72/W Nominal	122 lm/module	0.060 A/Module
ULTRA Lyte 2 Color	7.09 in. 180 mm	1.69 per ft (5.56 per m)	0.72/W Nominal	Red: 25 lm/module Blue: 13 lm/module Green: 54 lm/module	0.059 A/Module
ULTRA Lyte 3	9.84 in. 250 mm	1.22 per ft (4 per m)	1.08/W Nominal	184 lm/module	0.090 A/Module





ONEWhite<sup>®</sup>  
COLOR CONSISTENCY





VERSALENZ<sup>®</sup>  
ADVANCED OPTICS



## DIMENSION DRAWINGS ULTRA Lyte 1

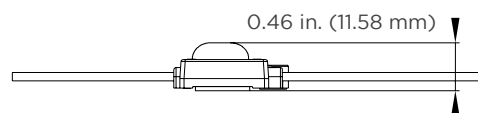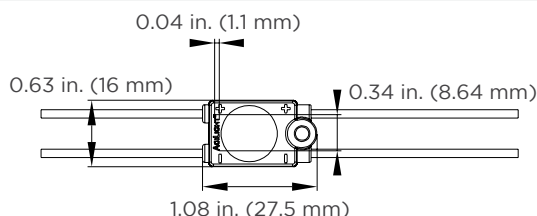

## ULTRA Lyte 2 & ULTRA Lyte 2 Color

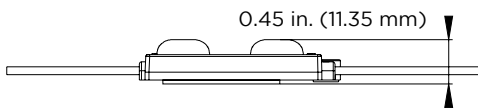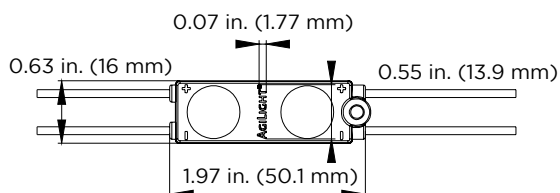

## ULTRA Lyte 3

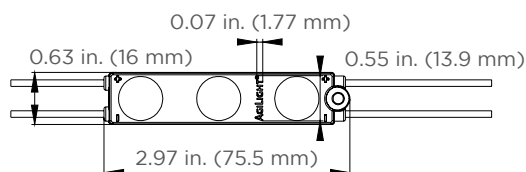

CAPZUL<sup>®</sup>  
WATERPROOF



CONSTANT CURRENT



UV RESISTANT



50,000 HRS  
L70 LIFETIME

REV.05SEP2024