


**PRO LYTE 2 COLOR**

Great for channel letters, box signs and accent lighting, PRO Lyte 2 Color features dual-LED modules in a 24 VDC true IC constant current design that maintains pure colored light across each string. With an IP67 rating and a seven-year warranty, PRO Lyte 2 Color allows speedy installation with a convenient continuous release liner for the mounting tape. Spaced at 7.09 in. (180 mm), PRO Lyte 2 Color is available in Red, Green and Blue.

**Applications:**

- Channel letters
- Box and cabinet signs
- Accent and cove lighting

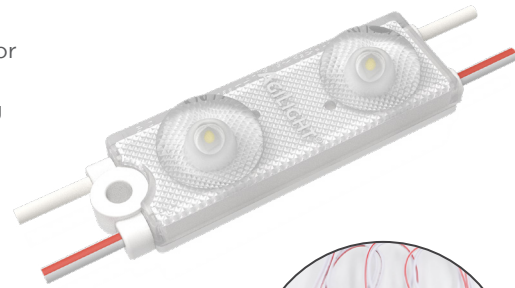

24 VDC




7-YEAR LIMITED WARRANTY



VERSALENZ<sup>®</sup> ADVANCED OPTICS

**CONTINUOUS RELEASE LINER**  
REDUCES INSTALLATION TIME BY 30%



CONSTANT CURRENT



UV RESISTANT



50,000 HRS L70 LIFETIME

**ORDERING GUIDE**


Part Number	Colors <sup>1</sup>	Module Spacing (in. / mm)	Wattage (W)	Input Current (mA)	Number of Modules		Nominal Light Output (lm)			
					Per Foot	Per Meter	Per Watt	Per Module	Per Foot	Per Meter
LS-PL2-RED-B180-A	Red (625 nm)	7.09 / 180	0.72	30	1.69	5.56	37	26	44	144
LS-PL2-GRN-B180-A	Green (525 nm)	7.09 / 180	0.72	30	1.69	5.56	94	67	113	372
LS-PL2-BLU-B180-A	Blue (468 nm)	7.09 / 180	0.72	30	1.69	5.56	21	15	25	83

1. Custom colors available by request

**PRODUCT RATINGS**

Input Voltage	24 VDC
IC Design	Constant Current
Lumen Drop	< 3%
Ingress Protection	IP67
Beam Angle	176
MacAdam ellipse	3-step binning
Molding Material	ABS
Operating Temperature	-13 — 140 °F (-25 — 60 °C)
Lifetime (L70 reported)	50,000 hours
Warranty	7-year limited warranty
Dimensions (L x W x H)	1.97 x 0.63 x 0.45 in. (50.1 x 16 x 11.38 mm)

**LUMINOUS INTENSITY DISTRIBUTION**

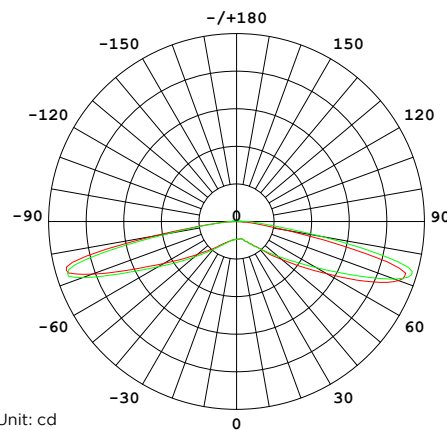

Unit: cd  
 — CO/180, 173.7  
 — C90/270, 178.9  
 Average Beam Angle (50%): 176.3°



### MODULE DIMENSIONS

Part Number	Length (in./mm)	Width (in./mm)	Height (in./mm)
LS-PL2-XXX-B180-A	1.97/50.1	0.63/16	0.45/11.38

### POWER SUPPLY LOADING

Module Type	per 100 W			
	Max # of Modules Per String	Max Total # of Modules	Total # of Feet	Total # of Meters
LS-PL2-XXX-B180-A	100	127	75.03	22.806

### LAYOUT GUIDE\*

Channel Depth (in.)	Single Row		Multiple Rows		Channel Depth (mm)	Single Row		Multiple Rows	
	Max. Stroke	Module Spacing	Row Spacing	Module Spacing		Max. Stroke	Module Spacing	Row Spacing	Module Spacing
2	8	7.09	8	7.09	50	200	180	200	180
3	12	7.09	10	7.09	75	300	180	250	180
4	16	7.09	12	7.09	100	400	180	300	180
5	22	7.09	16	7.09	125	550	180	400	180


\*Module spacing is defined by 7328 white sign face material

### SHIPPING INFORMATION

Module Type	Specs	Packaging Quantity		
		Per Bag	Per Box	Per Carton
LS-PL2-XXX-B180-A	Modules	100	700	1400

Carton Dimensions			Carton Weight	Box Dimensions			Box Weight	
L	W	H	17.6 kg (38.8 lbs)	L	W	H	8.8 kg (19.4 lbs)	
20.47	14.57	10.24		13.78	9.87	9.06		in.
520	370	260		350	250	230		mm

### DIMENSION DRAWING

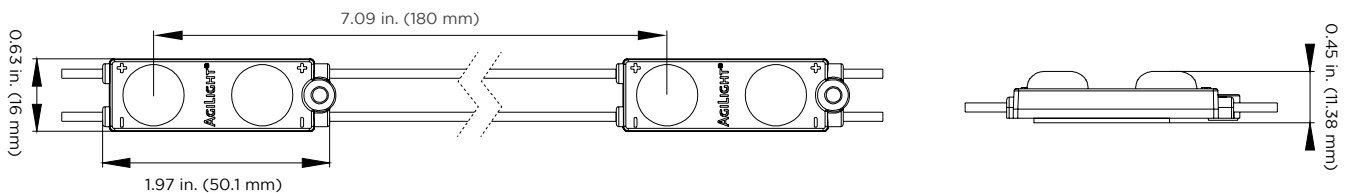

1. UL ONLY - These products are only suitable for connection to a UL rated Class 2 power source rated 12 Volt or less.
2. UL ONLY - These products are intended for use only when connected to a power source that complies with UL rated Class 2 voltage and energy limited circuit.
3. UL ONLY -When these units are connected to a UL rated Class 2 circuit, they are not to draw a total wattage of greater than the secondary or output rating of the UL rated Class 2 power supply.
4. These products may be secured in place in the end product by any means available.
5. These products are suitable for use in dry and damp locations. Not suitable for wet or submersed applications.

#### GLOBAL HQ

320 Murray Hill Pkwy  
East Rutherford, NJ 07073  
U.S.  
T: (+1) 212 629 6830  
E: Sales-US@GENLEDBrands.com

#### EUROPEAN HQ

Hogeweyselaan 119  
1382 JK Weesp  
Netherlands  
T: (+31) 346 235 000  
E: SalesEurope@GENLEDBrands.com

#### MEINA HQ

PO Box 371378, #823, Building 4EA  
Dubai Airport Free Zone  
Dubai, UAE  
T: (+971) 4 701 7901  
E: SalesMEINA@genledbrands.com

#### ASIA-PACIFIC HQ

Room 402, Building D  
ShenShi Tongchuang Science and Technology Park  
No. 16 Hongyin Road  
Xingqiang Community, Xindu Street  
Guangming District, Shenzhen, China 518107  
Sales: (+86) 139 1836 3905  
Office: (+86) 755 8529 0710  
E: Sales-Pacific@GENLEDBrands.com