

PRO LYTE 4

Great for channel letters, box signs and accent lighting, PRO Lyte 4 features quad-LED modules in a 24V true IC constant current design that maintains brilliant light across each string. With an IP67 rating and a seven-year warranty, PRO Lyte 4 allows speedy installation with a convenient continuous release liner for the mounting tape. Spaced at 12.01 in. (305 mm), PRO Lyte 4 generates up to 170 lm/W in sign-bright 6500K. Available in three CCTs (5000K, 6500K, 7100K).

Applications:

- Channel letters
- Box and cabinet signs
- Accent and cove lighting



IP67



24V DC



7 YEAR LIMITED WARRANTY



ONEWhite[®] COLOR CONSISTENCY



VERSALENZ[®] ADVANCED OPTICS


ORDERING GUIDE

Part Number	White Color Temperatures & Colors	LEDs per Module	Module Spacing (in. / mm)	Number of Modules		Nominal Light Output (lm)		
				Per Foot	Per Meter	Per Module	Per Foot	Per Meter
LS-PL4-71K-B305-A	7100K	4	12.01 / 305	1	3.28	245	245	803
LS-PL4-65K-B305-A	6500K	4	12.01 / 305	1	3.28	245	245	803
LS-PL4-50K-B305-A	5000K	4	12.01 / 305	1	3.28	245	245	803

PRODUCT RATINGS

Luminous Efficacy	170 lm/W
Wattage per Module	1.44 W/module
Input Voltage	24 V DC
IC Design	Constant Current
Lumen Drop	< 3%
Ingress Protection	IP67
Beam Angle	176
Molding Material	ABS
Operating Temperature	-13° - +140° F (-25° - +60° C)
L70 Lifetime @ 60° C	50,000 Hours
Warranty	7 Year Limited Warranty
Dimensions (L x W x H)	3.03 x 0.77 x 0.4 in. (77 x 19.56 x 10.16 mm)

LUMINOUS INTENSITY DISTRIBUTION

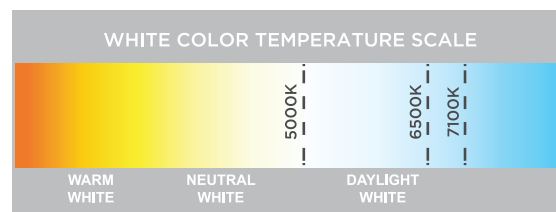

CAPZUL[®] WATERPROOF



CONSTANT CURRENT



UV RESISTANT



50,000 HRS L70 LIFETIME

DIMENSIONS

