


ULTRA LYTE 1

Great for channel letters, box signs and accent lighting, ULTRA Lyte 1 features a powerful single LED module in a 12V true IC constant current design that maintains brilliant light across each string. With an IP67 rating and a seven-year warranty, ULTRA Lyte 1 allows speedy installation with a convenient continuous release liner for the mounting tape. Spaced at 4.92 in. (125 mm), ULTRA Lyte 1 generates up to 170 lm/W in sign-bright 6500K. Available in three CCTs (5000K, 6500K, 7100K).

Applications:

- Channel letters
- Box and cabinet signs
- Accent and cove lighting



7 YEAR LIMITED WARRANTY



IP67



ONEWhite[®]
 COLOR CONSISTENCY

ORDERING GUIDE

| Part Number | White Color Temperatures | LEDs per Module | Module Spacing (in./mm) | Number of Modules | | Nominal Light Output (lm) | | |
|-------------------|--------------------------|-----------------|-------------------------|-------------------|-----------|---------------------------|----------|-----------|
| | | | | Per Foot | Per Meter | Per Module | Per Foot | Per Meter |
| LS-UL1-71K-B125-A | 7100K | 1 | 4.92 / 125 | 2.44 | 8 | 61 | 149 | 488 |
| LS-UL1-65K-B125-A | 6500K | 1 | 4.92 / 125 | 2.44 | 8 | 61 | 149 | 488 |
| LS-UL1-50K-B125-A | 5000K | 1 | 4.92 / 125 | 2.44 | 8 | 61 | 149 | 488 |



VERSALENZ[®]
 ADVANCED OPTICS




CAPZUL[®]
 WATERPROOF

PRODUCT RATINGS

| | |
|------------------------|--|
| Luminous Efficacy | 170 lm/W |
| Wattage per Module | 0.36 W/module |
| Input Voltage | 12 V DC |
| IC Design | Constant Current |
| Lumen Drop | < 3% |
| Ingress Protection | IP67 |
| Beam Angle | 176 |
| Molding Material | ABS |
| Operating Temperature | -13° - + 140° F (-25° - +60° C) |
| L70 Lifetime @ 60° C | 50,000 Hours |
| Warranty | 7 Year Limited Warranty |
| Dimensions (L x W x H) | 1.08 x 0.63 x 0.46 in. (27.5 x 16 x 11.58 mm) |

LUMINOUS INTENSITY DISTRIBUTION

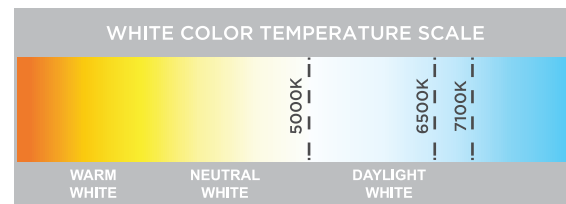

CONSTANT CURRENT



UV RESISTANT



50,000 HRS
 L70 LIFETIME

MODULE DIMENSIONS

| Part Number | Length (in/mm) | Width (in/mm) | Height (in/mm) |
|-------------------|----------------|---------------|----------------|
| LS-UL1-XXK-B125-A | 1.08/27.5 | 0.63/16 | 0.46/11.58 |

POWER SUPPLY LOADING

| Module Type | per 60W | | | |
|-------------------|-----------------------------|------------------------|-----------------|-------------------|
| | Max # of Modules Per String | Max Total # of Modules | Total # of Feet | Total # of Meters |
| LS-UL1-XXK-B125-A | 70 | 150 | 62.5 | 18.75 |

LAYOUT GUIDE*

| Channel Depth (in.) | Single Row | | Multiple Rows | | Channel Depth (mm) | Single Row | | Multiple Rows | |
|---------------------|-------------|----------------|---------------|----------------|--------------------|-------------|----------------|---------------|----------------|
| | Max. Stroke | Module Spacing | Row Spacing | Module Spacing | | Max. Stroke | Module Spacing | Row Spacing | Module Spacing |
| 2 | 8 | 5 | 8 | 5 | 50 | 200 | 125 | 200 | 125 |
| 3 | 14 | 5 | 12 | 5 | 75 | 350 | 125 | 300 | 125 |
| 4 | 18 | 5 | 14 | 5 | 100 | 450 | 125 | 350 | 125 |


*Module spacing is defined by 7328 white sign face material

SHIPPING INFORMATION

| Module Type | Specs | Packaging Quantity | | |
|-------------------|---------|--------------------|---------|------------|
| | | Per Bag | Per Box | Per Carton |
| LS-UL1-XXK-B125-A | Modules | 70 | 910 | 1820 |

| Carton Dimensions | | | Carton Weight | Box Dimensions | | | Box Weight |
|-------------------|-------|-------|----------------------|----------------|------|------|-----------------------|
| L | W | H | | L | W | H | |
| 20.47 | 14.57 | 10.24 | 15 kg (33.07 lbs) | 13.78 | 9.87 | 9.06 | 7.5 kg (16.53 lbs) |
| 520 | 370 | 260 | | 350 | 250 | 230 | in. mm |

DIMENSION DRAWING

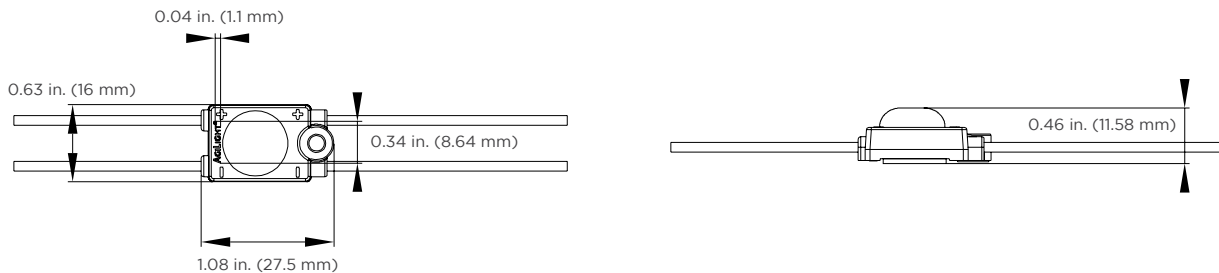

1. UL ONLY - These products are only suitable for connection to a UL rated Class 2 power source rated 12 Volt or less.
2. UL ONLY - These products are intended for use only when connected to a power source that complies with UL rated Class 2 voltage and energy limited circuit.
3. UL ONLY - When these units are connected to a UL rated Class 2 circuit, they are not to draw a total wattage of greater than the secondary or output rating of the UL rated Class 2 power supply.
4. These products may be secured in place in the end product by any means available.
5. These products are suitable for use in dry and damp locations. Not suitable for wet or submersed applications.