



LYTE SERIES

12V / 24V

LED Signage Lighting Solutions

GEN LED **AGILIGHT**[®]
Innovative Signage Lighting



LYTE SERIES

12V / 24V



IP67



LED Signage Lighting Solutions

ULTRA Lyte and PRO Lyte modules bring premium performance to the AgiLight value line! 12V ULTRA Lyte and 24V PRO Lyte modules generate amazingly consistent output. They are the most cost-effective true-IC constant current modules on the market, with efficacy of up to 170 lm/W! Available in five static white CCTs and three static colors, ULTRA Lyte and PRO Lyte modules feature a continuous release liner for easy installation. Rated IP67 for damp and wet locations, the Lyte Series offers great solutions for channel letters, box signs and cove lighting on a budget.



Constant Current IC Design

NO LUMEN DROP!

ULTRA Lyte and PRO Lyte modules are engineered with a **CONSTANT CURRENT IC DESIGN** that maintains lumen output across an entire string. Imitation modules lose power and dim as you get to the end of a string. The Constant Current technology in the Lyte Series provides consistency you just can't find in other value line modules.

Lyte Series modules from AgiLight combine **VALUE & PERFORMANCE** like no other LED modules in their class.





7-YEAR
LIMITED
WARRANTY



CAPZUL®
WATERPROOF
TECHNOLOGY




ONEWhite®
COLOR
CONSISTENCY




CONSTANT
CURRENT
IC DESIGN



Superior Efficacy




Our Static White Lyte Series modules operate with **BEST-IN-CLASS** light output and efficacy of **170 LM/W**. With these power-sipping LED signage solutions, you need fewer drivers in each installation. Lyte Series modules generate a markedly improved return on investment and far lower operating costs for the end user.

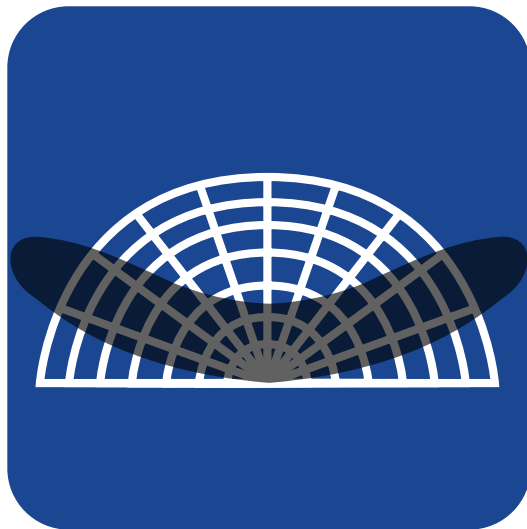

Premium Optics



Lyte Series modules feature AgiLight's proprietary **VERSALENZ ADVANCED OPTICS**. This premium lens design creates comprehensive light coverage with a batwing beam pattern that allows for wider spacing and requires fewer modules in any application!

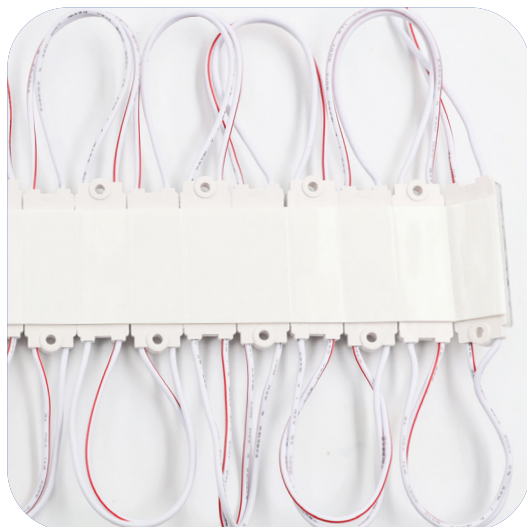

MASSIVE Time Savings



When you're on the job, time is money. Our new **CONTINUOUS RELEASE LINER** improves installation times by **UP TO 40%**. No more need to peel the backing from each individual module - just grab an end and go! With one simple motion, ULTRA Lyte and PRO Lyte modules are ready to install.

SPECIFICATIONS

12 V Product	Part Number	Depth Target	Lumens per Watt	Lumens per Module	Max # of Modules per 60W PS	Wattage
ULTRA LYTE 1	LS-UL1-xxK-B125-A	2-4 in. (50-100 mm)	170	61	150	0.36
ULTRA LYTE 2	LS-UL2-xxK-B180-A	2-5 in. (50-125 mm)	170	122	75	0.72
ULTRA LYTE 2 COLOR	LS-UL2-xxx-B180-A	2-5 in. (50-125 mm)	RED: 25 / GRN: 54 / BLU: 13	RED: 18 / GRN: 38 / BLU: 9	76	0.72
ULTRA LYTE 3	LS-UL3-xxK-B250-A	3-8 in. (75-200 mm)	170	184	50	1.08
24 V Product	Part Number	Depth Target	Lumens per Watt	Lumens per Module	Max # of Modules per 100W PS	Wattage
PRO LYTE 2	LS-PL2-xxK-B180-A	2-5 in. (50-125 mm)	170	122	125	0.72
PRO LYTE 2 COLOR	LS-PL2-xxx-B180-A	2-5 in. (50-125 mm)	RED: 37 / GRN: 94 / BLU: 21	RED: 26 / GRN: 67 / BLU: 15	127	0.72
PRO LYTE 4	LS-PL4-xxK-B305-A	3-8 in. (75-200 mm)	170	245	64	1.44

LAYOUT GUIDES*

*Module spacing is defined by 7328 white sign face material

12 V ULTRA LYTE 1	Channel Depth (in./mm)	Single Row		Multiple Rows	
		Max. Stroke	Module Spacing	Row Spacing	Module Spacing
	2/50	8/200	5/125	8/200	5/125
	3/75	14/350	5/125	12/300	5/125
	4/100	18/450	5/125	14/350	5/125

12 V ULTRA LYTE 2	Channel Depth (in./mm)	Single Row		Multiple Rows	
		Max. Stroke	Module Spacing	Row Spacing	Module Spacing
	2/50	8/200	7.09/180	8/200	7.09/180
	3/75	12/300	7.09/180	10/250	7.09/180
	4/100	16/400	7.09/180	12/300	7.09/180
	5/125	22/550	7.09/180	16/400	7.09/180

12 V ULTRA LYTE 3	Channel Depth (in./mm)	Single Row		Multiple Rows	
		Max. Stroke	Module Spacing	Row Spacing	Module Spacing
	3/75	12/300	9.84/250	12/300	9.84/250
	4/100	18/450	9.84/250	18/450	9.84/250
	5/125	24/600	9.84/250	24/600	9.84/250
	6/150	30/750	9.84/250	26/650	9.84/250
	7/175	34/850	9.84/250	26/650	9.84/250
	8/200	40/1000	9.84/250	28/700	9.84/250

24 V PRO LYTE 2	Channel Depth (in./mm)	Single Row		Multiple Rows	
		Max. Stroke	Module Spacing	Row Spacing	Module Spacing
	2/50	8/200	7.09/180	8/200	7.09/180
	3/75	12/300	7.09/180	10/250	7.09/180
	4/100	16/400	7.09/180	12/300	7.09/180
	5/125	22/550	7.09/180	16/400	7.09/180


24 V PRO LYTE 4	Channel Depth (in./mm)	Single Row		Multiple Rows	
		Max. Stroke	Module Spacing	Row Spacing	Module Spacing
	3/75	12/300	12.01/305	10/250	12.01/305
	4/100	14/350	12.01/305	12/300	12.01/305
	5/125	18/450	12.01/305	14/350	12.01/305
	6/150	24/600	12.01/305	18/450	12.01/305
	8/200	34/850	12.01/305	22/550	12.01/305

DIMENSIONS

ULTRA LYTE 1




ULTRA LYTE 3



ULTRA LYTE 2 / PRO LYTE 2



PRO LYTE 4



REV.29OCT2024

GLOBAL HQ

320 Murray Hill Pkwy
East Rutherford, NJ 07073
T: (+1) 212 629 6830
E: Sales-US@GENLEDBrands.com

EUROPEAN HQ

De Corridor 16K
3621ZB Breukelen
Netherlands
T: (+31) 346 235 000
E: SalesEurope@GENLEDBrands.com

MEINA HQ

PO Box 371378, #823, Building 4EA
Dubai Airport Free Zone, Dubai, UAE
T: (+971) 4 701 7901
E: SalesMEINA@genlebrands.com

ASIA-PACIFIC HQ

Room 402, Building D
Shensi Tongchuang Science and Technology Park
No. 16 Hongyin Road
Xingqiang Community, Xiniu Street
Guangming District, Shenzhen, China 518107
Sales: (+86) 139 1836 3905
Office: (+86) 755 8529 0710
E: Sales-Pacific@GENLEDBrands.com

[linkedin.com/company/agilight-inc](https://www.linkedin.com/company/agilight-inc)

[facebook.com/AgilightLED](https://www.facebook.com/AgilightLED)

[instagram.com/agilightled](https://www.instagram.com/agilightled)