

Light efficiency:

36 Lumen/Watt

Light quality:

CRI: 0.0

Color temperature:

0 K

Output: 40.0 lm

Peak: 7.77 cd

Power: 1.1 W

PF: 1.0



Tracking number: [n/a](#)

Product name:

**PC30.5MRBORGBWADR203.0RGB30  
- BLUE 1 ROW**

Item number:

Date and time:


**2024/10/9 17:49:14**

Operator:

**Nick**


Description:

**DIAMETER 120MM,LENGTH 500MM  
1 ROW RIBBONLYTE INSIDE**

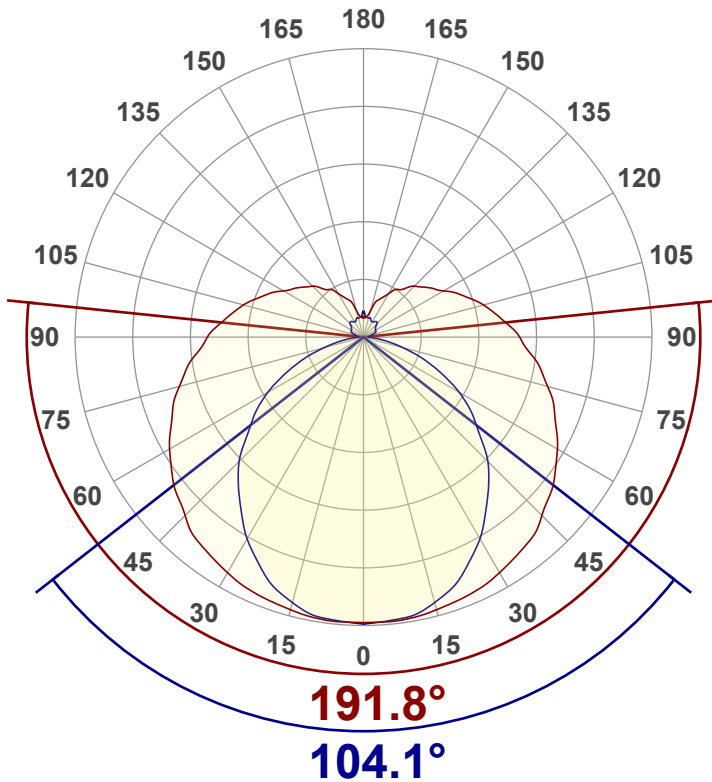



CIE 1931  
x: 0.128  
y: 0.074

Spectra

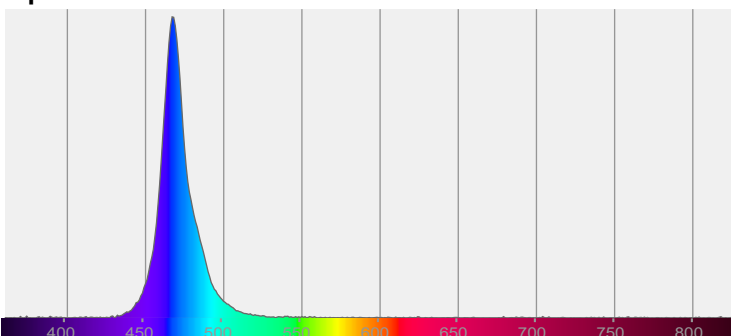

Power

Voltage: 24.0 V  
Current: 0.046 A  
Frequency: 0 Hz

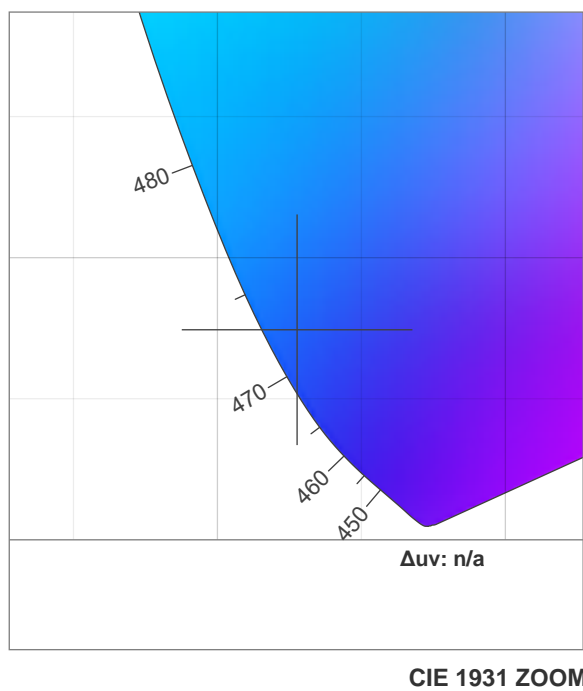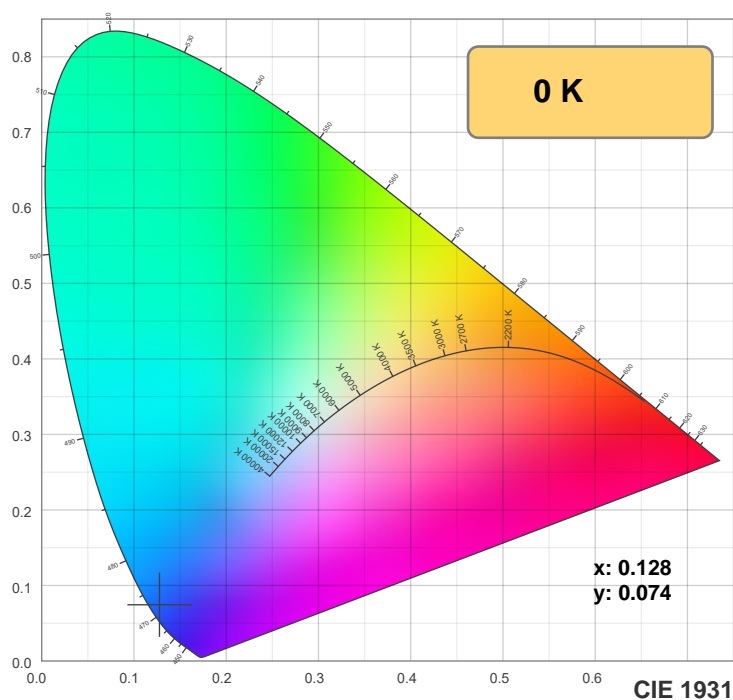

TM-30: 0.0

0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16	

CRI: 0.0 (R1-R8)

0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15		

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

CQS: 0.0

0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15		

## Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
0 K	0.0	0.0	0.0	0.0	0.0	0.128	0.074	0.140	0.123	n/a






**Rf 0.0**

Fidelity index Rf


**Rg 0.0**

Gamut index Rg

Hue Bin	R <sub>f</sub>	Shifts (%)	
		Chroma	Hue
1	0	0%	0%
2	0	0%	0%
3	0	0%	0%
4	0	0%	0%
5	0	0%	0%
6	0	0%	0%
7	0	0%	0%
8	0	0%	0%
9	0	0%	0%
10	0	0%	0%
11	0	0%	0%
12	0	0%	0%
13	0	0%	0%
14	0	0%	0%
15	0	0%	0%
16	0	0%	0%

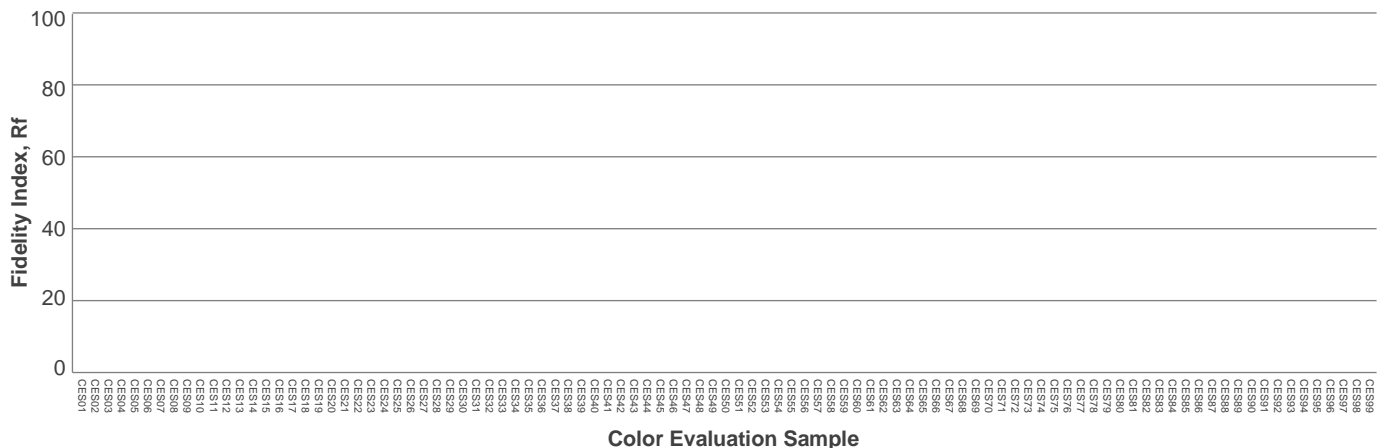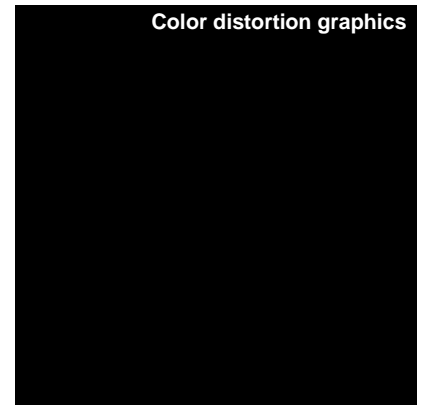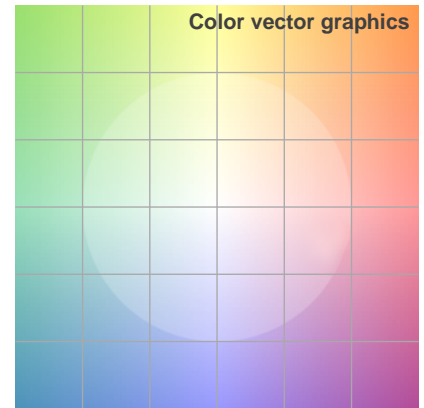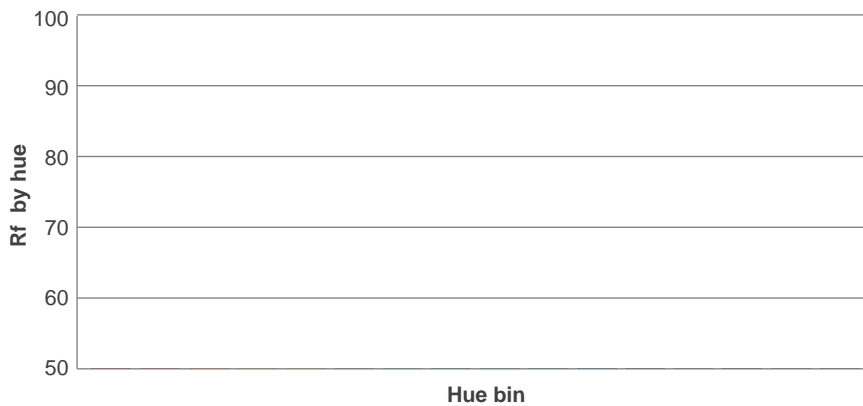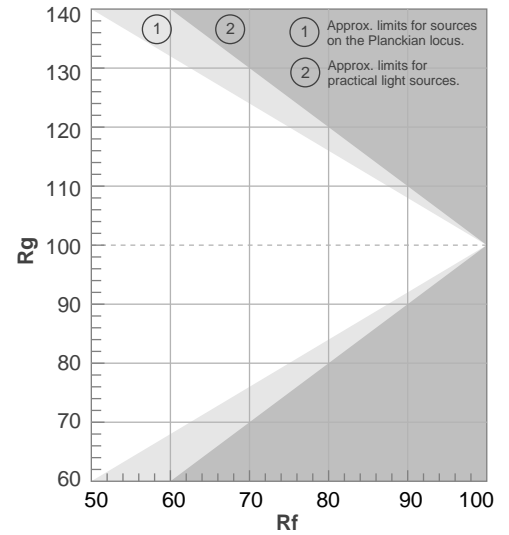

## Beam details

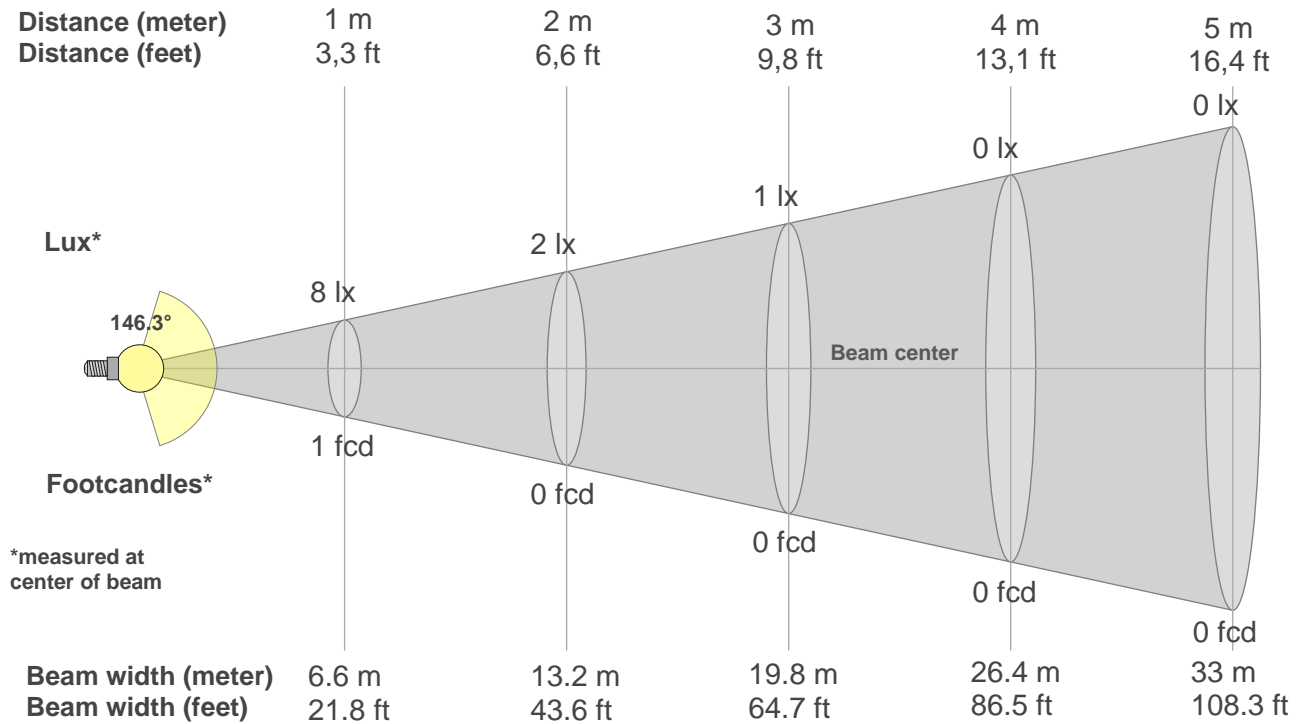

### Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
8lx	2lx	1lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx
0.7fcd	0.2fcd	0.1fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd

### Intensities in 0° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
7.75	7.70	7.58	7.43	7.18	6.82	6.38	5.87	5.36	4.79	4.22	3.68	3.18	2.69	2.26	1.94	1.59	1.24	0.95	0.57
100%	99%	98%	96%	93%	88%	82%	76%	69%	62%	54%	47%	41%	35%	29%	25%	20%	16%	12%	7%

### Intensities in 90° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
7.75	7.64	7.26	6.55	5.65	4.74	3.67	2.59	1.47	0.57	0.15	0.18	0.28	0.37	0.40	0.52	0.52	0.48	0.54	0.55
100%	99%	94%	84%	73%	61%	47%	33%	19%	7%	2%	2%	4%	5%	5%	7%	7%	6%	7%	7%

### Intensities in 180° c-plane


0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
7.75	7.70	7.58	7.43	7.18	6.82	6.38	5.87	5.36	4.79	4.22	3.68	3.18	2.69	2.26	1.94	1.59	1.24	0.95	0.57
100%	99%	98%	96%	93%	88%	82%	76%	69%	62%	54%	47%	41%	35%	29%	25%	20%	16%	12%	7%

### Intensities in 270° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
7.75	7.64	7.26	6.55	5.65	4.74	3.67	2.59	1.47	0.57	0.15	0.18	0.28	0.37	0.40	0.52	0.52	0.48	0.54	0.55
100%	99%	94%	84%	73%	61%	47%	33%	19%	7%	2%	2%	4%	5%	5%	7%	7%	6%	7%	7%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
146.3°	279.7°	360°	48.0%	31.0%

**iso-candela diagram**

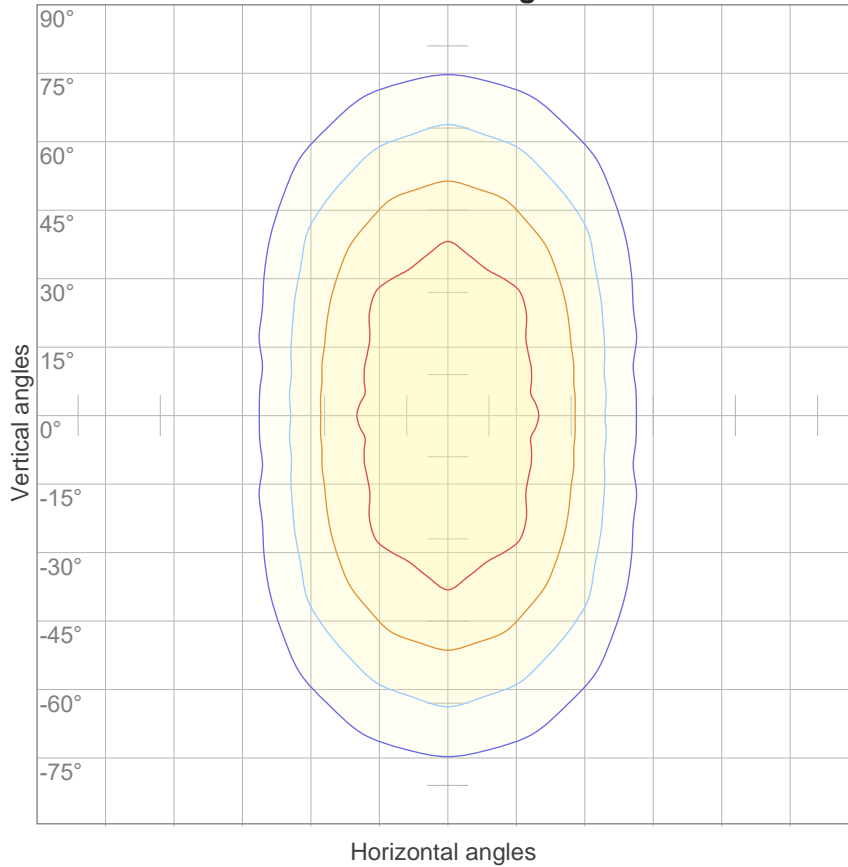


10%	1 cd
20%	2 cd
30%	2 cd
40%	3 cd
50%	4 cd
60%	5 cd
70%	5 cd
80%	6 cd
90%	7 cd

Conditions:

Number of c-planes: 24

Candela at center: 8 cd

**iso-lux diagram**

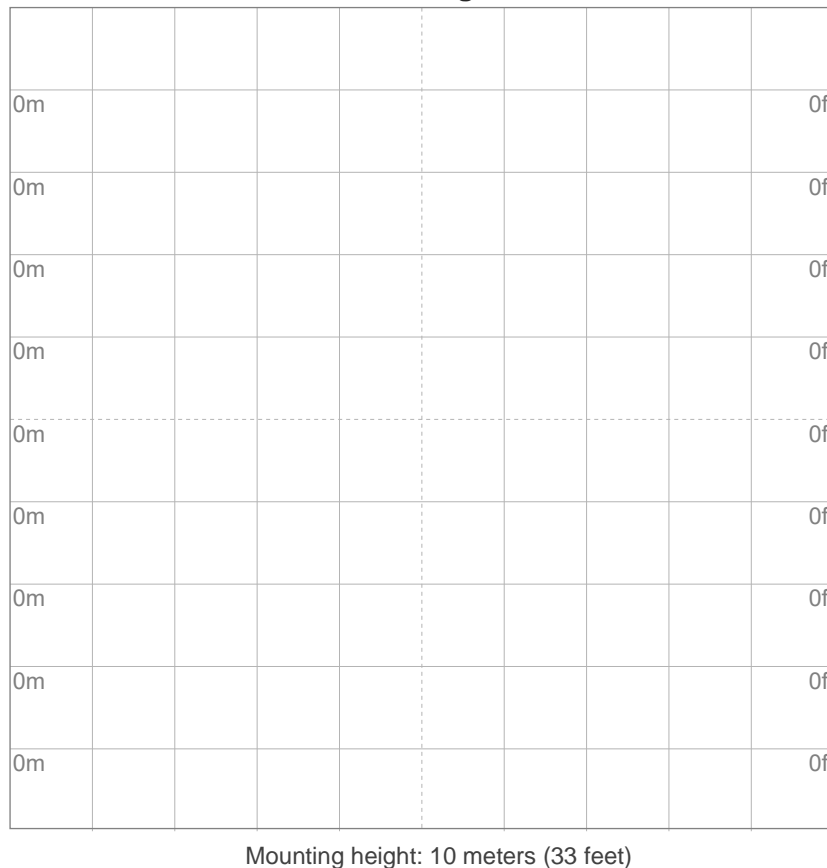

3%	2.33m lx
5%	3.88m lx
10%	7.75m lx
30%	23.3m lx
50%	38.8m lx

Conditions:

Number of c-planes: 24

Lux at center: 77.5m lx

*Lux distribution on a surface when lamp is mounted at 10 meters from the surface.*

**Glare evaluation according to UGR**


p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X      Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	2.4	3.5	3.0	4.1	4.9	0.6	1.7	1.2	2.3	3.1
	3H	4.5	5.6	5.3	6.3	7.0	1.8	2.9	2.5	3.5	4.2
	4H	5.7	6.7	6.4	7.4	8.1	2.2	3.2	2.9	3.9	4.6
	6H	6.8	7.7	7.5	8.4	9.2	2.5	3.4	3.2	4.1	4.9
	8H	7.4	8.3	8.0	9.0	9.8	2.6	3.5	3.3	4.2	5.0
	12H	7.9	8.9	8.6	9.5	10.3	2.6	3.6	3.3	4.2	5.0
4H	2H	2.9	3.9	3.6	4.5	5.3	1.5	2.5	2.2	3.2	3.9
	3H	5.3	6.3	6.0	6.9	7.8	3.0	4.0	3.7	4.6	5.5
	4H	6.6	7.7	7.3	8.2	9.0	3.6	4.7	4.3	5.2	6.1
	6H	7.9	8.7	8.7	9.4	10.2	4.0	4.8	4.8	5.5	6.3
	8H	8.5	9.2	9.3	9.9	10.8	4.2	4.8	4.9	5.6	6.4
	12H	9.2	9.7	9.9	10.5	11.4	4.2	4.8	5.0	5.6	6.4
8H	4H	6.8	7.5	7.6	8.3	9.1	4.4	5.1	5.1	5.8	6.6
	6H	8.4	8.9	9.2	9.7	10.6	5.1	5.7	5.9	6.5	7.4
	8H	9.2	9.7	10.0	10.5	11.5	5.4	5.9	6.2	6.7	7.7
	12H	10.0	10.5	10.9	11.3	12.2	5.6	6.0	6.5	6.9	7.8
12H	4H	6.8	7.4	7.6	8.2	9.1	4.6	5.1	5.3	5.9	6.8
	6H	8.5	8.9	9.3	9.8	10.8	5.5	5.9	6.3	6.8	7.8
	8H	9.4	9.8	10.2	10.6	11.5	5.9	6.3	6.7	7.1	8.1
Variation of the observer position for the luminaire distance S											
S = 1.0H		0.1 / 0.0					0.1 / -0.1				
S = 1.5H		0.1 / -0.1					0.1 / -0.2				
S = 2.0H		0.2 / -0.2					0.2 / -0.5				
CIE 117-1995. Corrected glare indices referring to 40.0 lm total luminous flux											

## Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	113	113	113	113	108	108	108	108	97	97	97	88	88	88	79	79	79	75
1	100	94	89	84	95	89	84	80	80	77	73	72	69	66	65	62	60	56
2	90	80	72	66	85	76	69	63	69	63	58	62	57	53	55	51	48	45
3	81	70	61	54	76	66	58	51	60	53	47	53	48	43	48	43	40	36
4	74	61	52	45	70	58	50	43	52	45	40	47	41	36	42	37	33	30
5	68	54	45	38	64	52	43	36	47	39	34	42	36	31	38	33	29	26
6	62	48	39	33	59	46	38	31	42	35	29	38	32	27	34	29	25	22
7	58	44	35	28	54	42	33	27	38	31	26	34	28	24	31	26	22	19
8	53	40	31	25	50	38	30	24	35	28	23	31	25	21	28	23	19	17
9	50	36	28	22	47	35	27	22	32	25	20	29	23	19	26	21	17	15
10	47	33	25	20	44	32	24	19	29	23	18	27	21	17	24	19	16	14

LAMPS (number of lamps)

## Luminaire budgetary diagram

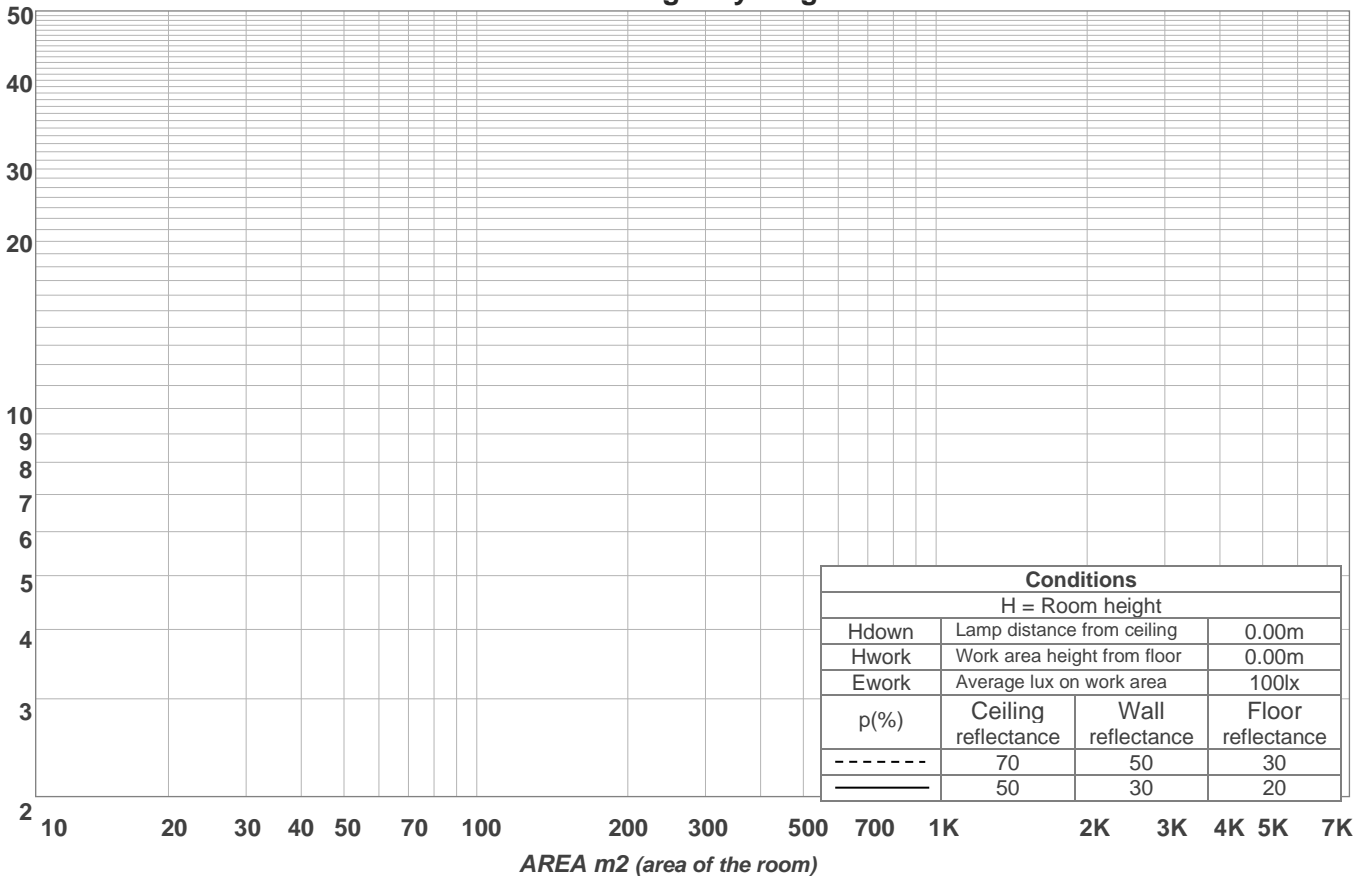

## Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
{LUM0-10}	2.11 lm	3.27 lm	4.09 lm	4.48 lm	4.51 lm	4.18 lm	3.66 lm	3.07 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
2.56 lm	2.09 lm	1.70 lm	1.31 lm	0.963 lm	0.654 lm	0.379 lm	0.179 lm	0.054 lm

LCS table

BUG rating:	B0 U1 G0	
Forward light	Lumens	Lumens %
Low(0-30):	3.1	7.6%
Medium(30-60):	6.5	16.4%
High(60-80):	3.9	9.8%
Very high(80-90):	1.5	3.8%
Back light		
Low(0-30):	3.1	7.6%
Medium(30-60):	6.5	16.4%
High(60-80):	3.9	9.8%
Very high(80-90):	1.5	3.8%
Uplight		
Low(90-100):	2.6	6.4%
High(100-180):	7.3	18.3%

LCS graph

