



# PICCOLO MICRO FIXTURES



RoHS

IP20

Declare.

TM66  
ASSESSED

TITLE 24  
9A8  
COMPLIANT

## Available Color Temperatures



2200K 2400K 2700K 3000K 3500K 4000K

## Housing finishes



Silver Black\* Custom\*

\*Consult factory. Additional fee and MOQ apply.

## Available Lens



Milky Lens  
63% Light Transmission



Piccolo is a family of custom micro fixtures that use a flat milky lens to create tiny, diode-free lines of light in tight spaces such as custom millwork (Piccolo) or small corners (Piccolo 45). Both the Piccolo and the Piccolo 45 are sold in custom sizes ranging from 2.43 in. (61.8 mm) to 6 ft. 6.81 in. (2001.8 mm) long in increments of 0.2 in. (5 mm). The Piccolo family features a special IP20 micro RibbonLyte that provides 90+ CRI in six available CCTs ranging from 2200K to 4000K.

## COMMON FEATURES

- 2.9 W/ft (9.6 W/m)
- Smallest fixture at 2.43 in. (61.8 mm) including end caps
- Sold in 0.2 in. (5 mm) increments up to 6 ft. 6.81 in. (2001.8 mm)
- 61 LEDs/ft (200 LEDs/m)
- 90+ CRI, diode-free
- IP20 rating (for indoor use)

## Piccolo

- 0.2 in. (5 mm) wide by 0.23 in. (5.91 mm) high
- Fixture includes secure VHB tape backing for mounting
- 120° beam angle

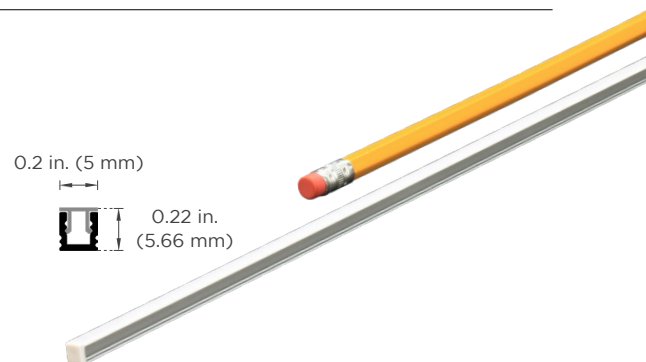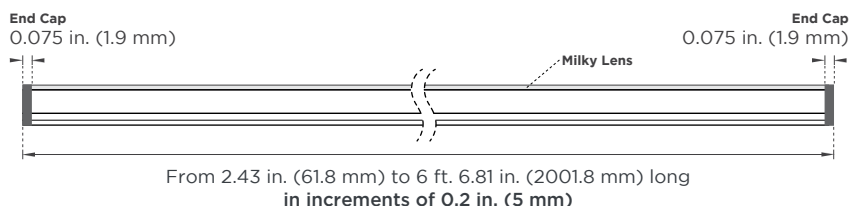

## Piccolo 45

- 0.26 in. (6.6 mm) wide by 0.26 in. (6.6 mm) high
- Mount with Mounting Clips or VHB tape
- 120° beam angle presented at 45°

