

### NEON APEX MINI WITH MOUNTING CLIPS, CHANNEL OR S-TYPE TRACK

**NOTE:** Neon Apex Mini fixtures (top- or side-bending models) have a min. bending radius of 1.18 in. (30 mm).

1. Mark and measure location for mounting clips, mounting channel or S-type track.


2. Drill pilot holes for mounting clips/channel/track and power feed as needed.



3. Affix mounting clips/channel/track with screws.

**NOTE:** Neon Apex Mini has a min. bending radius of 1.18 in. (30 mm). You may need to use extra clips or screws (with S-track) to hold curves in place.

4. Gently push Neon Apex Mini fixtures into mounting clips/channel/track from the top, starting at one end. DO NOT start in the middle. DO NOT try to stretch Neon Apex Mini.

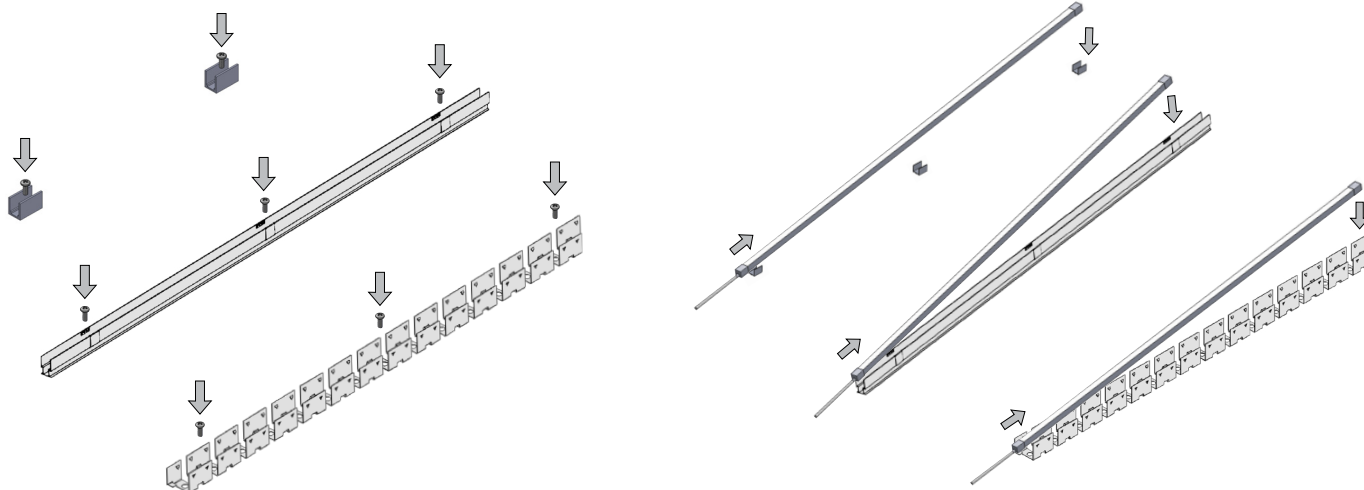

5. Make electrical connections. Installation complete.

