

Light efficiency:



Light quality:



Color temperature:



Output: 94.6 lm

Peak: 311 cd

Power: 6.9 W

PF: 1.0



Tracking number: [n/a](#)

Product name:

**NANOFLEX677.6RGB30ADD25WHB  
,blue**

Item number:

Date and time:


**2025/8/21 13:36:35**

Operator:

**MW**

Description:


**24Vdc,25w/m, RGBW30K,Beam  
angle:25degree, length:1m**

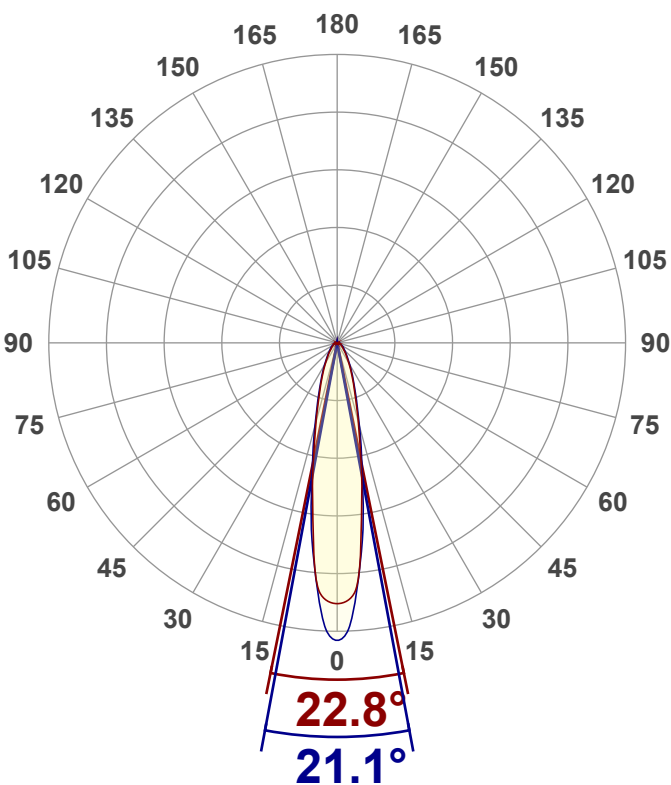


CIE 1931  
x: 0.133  
y: 0.061



**Spectra:** Peak wavelength :465

Dominant wavelength :469

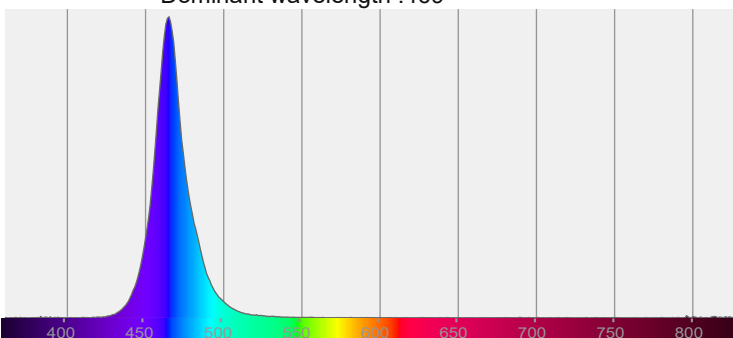


**Power**

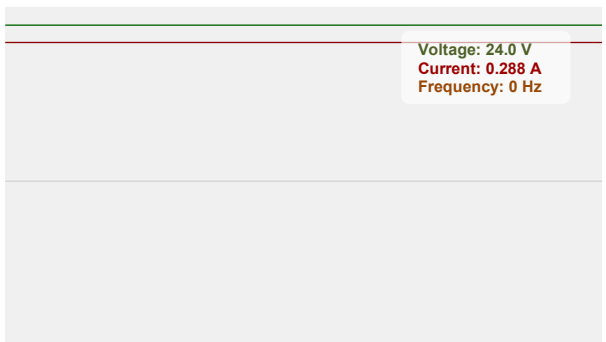


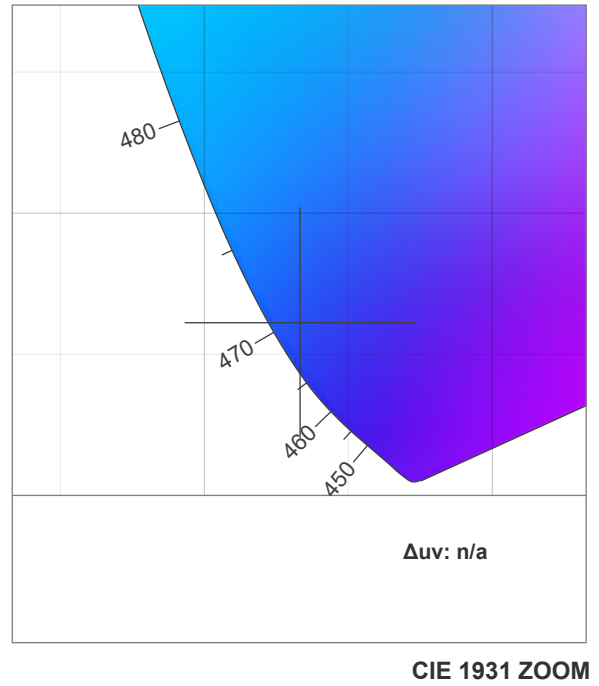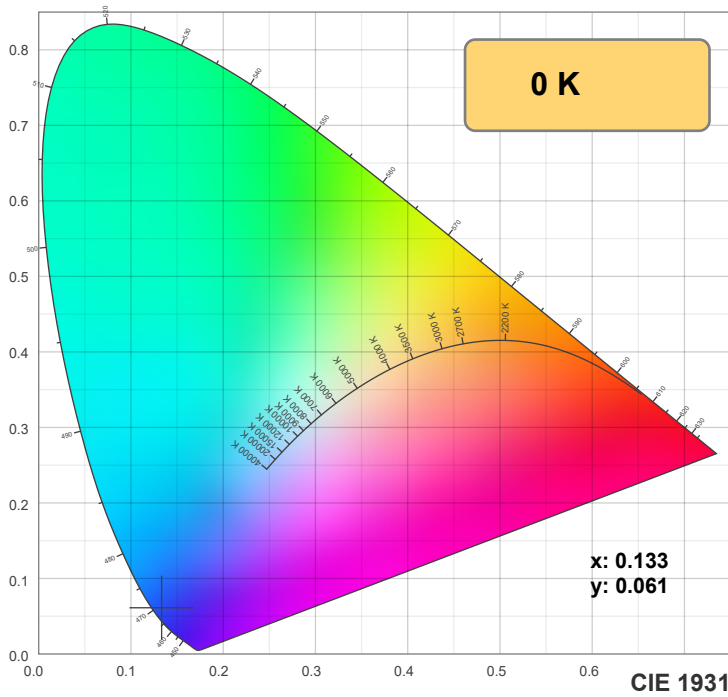

TM-30: 0.0

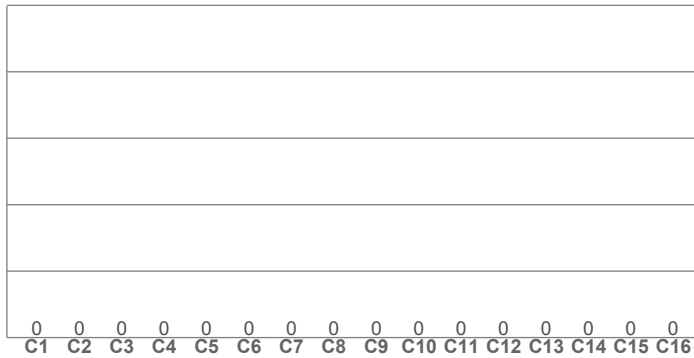

CRI: 0.0 (R1-R8)

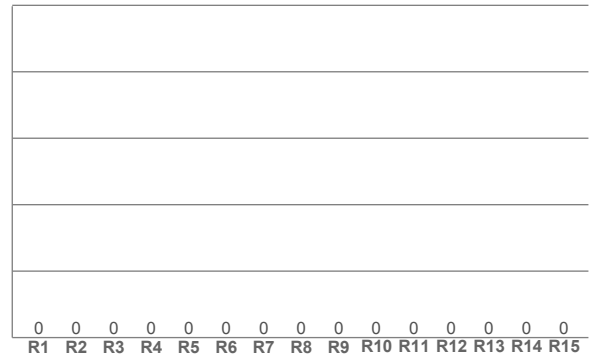

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

CQS: 0.0

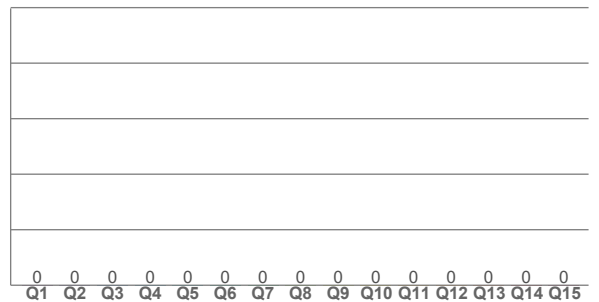

## Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	$\Delta uv$
0 K	0.0	0.0	0.0	0.0	0.0	0.133	0.061	0.154	0.106	n/a






**Rf 0.0**


Fidelity index Rf

**Rg 0.0**

Gamut index Rg

Hue Bin	R <sub>f</sub>	Shifts (%)	
		Chroma	Hue
1	0	0%	0%
2	0	0%	0%
3	0	0%	0%
4	0	0%	0%
5	0	0%	0%
6	0	0%	0%
7	0	0%	0%
8	0	0%	0%
9	0	0%	0%
10	0	0%	0%
11	0	0%	0%
12	0	0%	0%
13	0	0%	0%
14	0	0%	0%
15	0	0%	0%
16	0	0%	0%

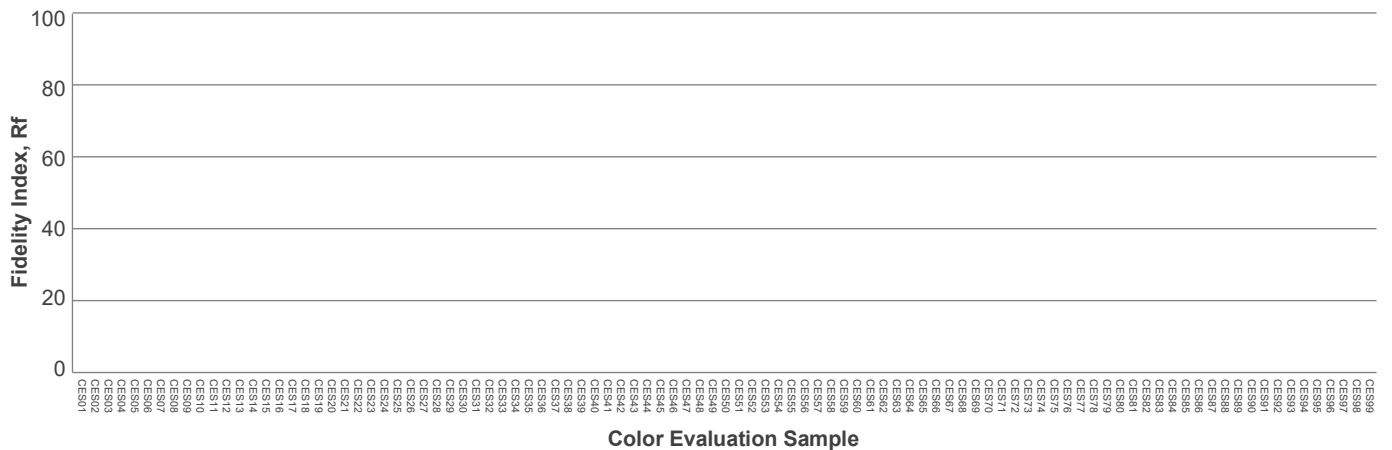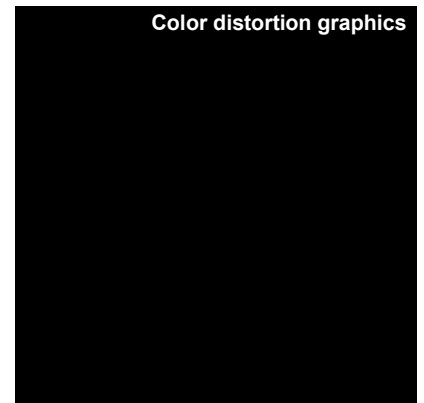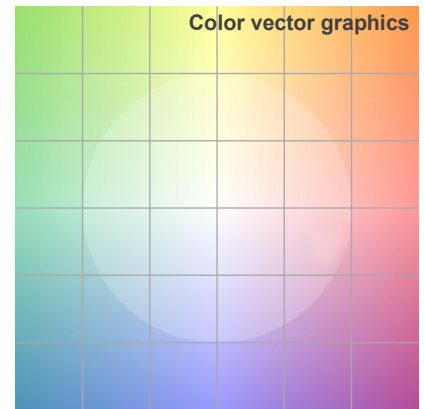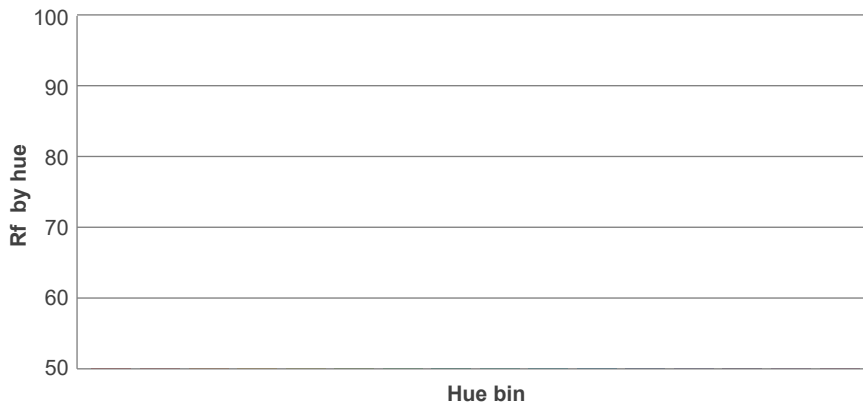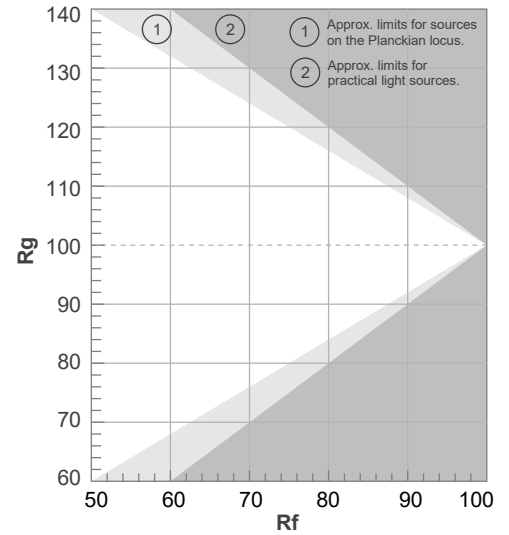

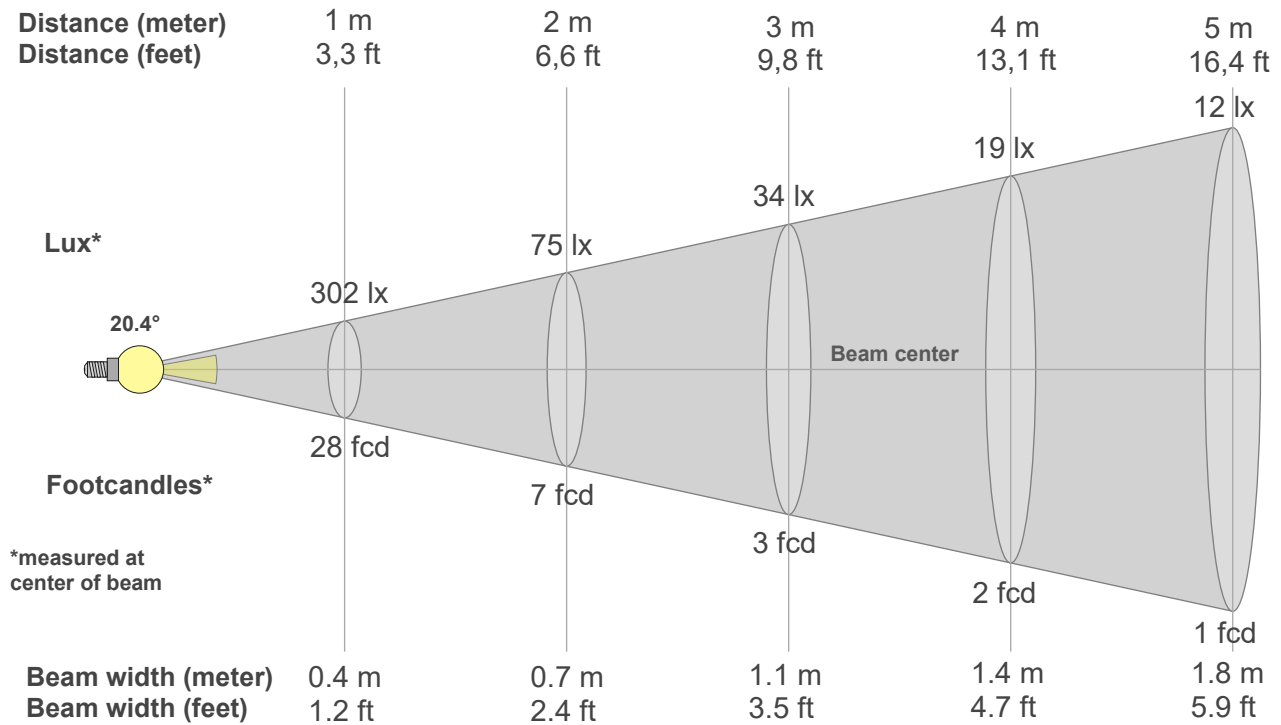

## Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
302lx	75lx	34lx	19lx	12lx	8lx	6lx	5lx	4lx	3lx	2lx	2lx	2lx	2lx	1lx	1lx	1lx	1lx	1lx	1lx
28fcd	7fcd	3.1fcd	1.8fcd	1.1fcd	0.8fcd	0.6fcd	0.4fcd	0.3fcd	0.3fcd	0.2fcd	0.2fcd	0.2fcd	0.1fcd	0.1fcd	0.1fcd	0.1fcd	0.1fcd	0.1fcd	0.1fcd

## Intensities in 0° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
302	266	266	228	188	153	125	96	81	66	55	47	39	34	29	25	22	18	17	15
100%	88%	88%	75%	62%	51%	41%	32%	27%	22%	18%	16%	13%	11%	10%	8%	7%	6%	5%	5%

## Intensities in 90° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
302	305	273	235	199	163	127	105	85	69	59	48	42	36	31	27	23	21	18	16
100%	101%	90%	78%	66%	54%	42%	35%	28%	23%	19%	16%	14%	12%	10%	9%	8%	7%	6%	5%

## Intensities in 180° c-plane


0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
302	266	266	228	188	153	125	96	81	66	55	47	39	34	29	25	22	18	17	15
100%	88%	88%	75%	62%	51%	41%	32%	27%	22%	18%	16%	13%	11%	10%	8%	7%	6%	5%	5%

## Intensities in 270° c-plane

0°	2°	4°	6°	8°	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°
302	305	273	235	199	163	127	105	85	69	59	48	42	36	31	27	23	21	18	16
100%	101%	90%	78%	66%	54%	42%	35%	28%	23%	19%	16%	14%	12%	10%	9%	8%	7%	6%	5%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
20.4°	55.5°	103.5°	92.7%	82.7%

**iso-candela diagram**

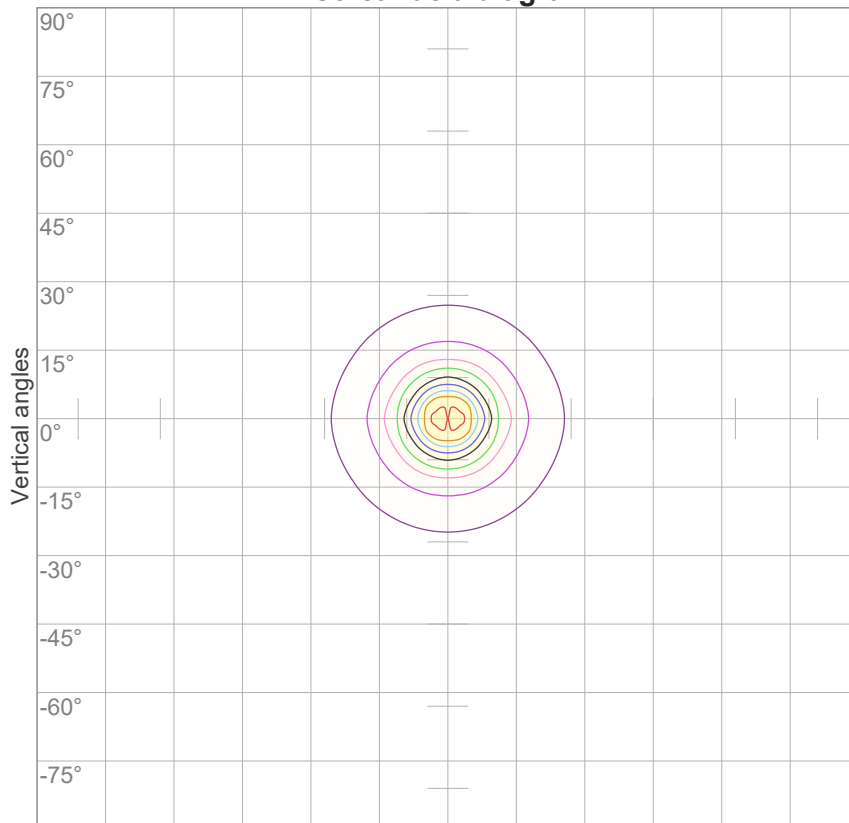


10%	30 cd
20%	60 cd
30%	90 cd
40%	121 cd
50%	151 cd
60%	181 cd
70%	211 cd
80%	241 cd
90%	271 cd

Conditions:

Number of c-planes: 12

Candela at center: 302 cd

**iso-lux diagram**

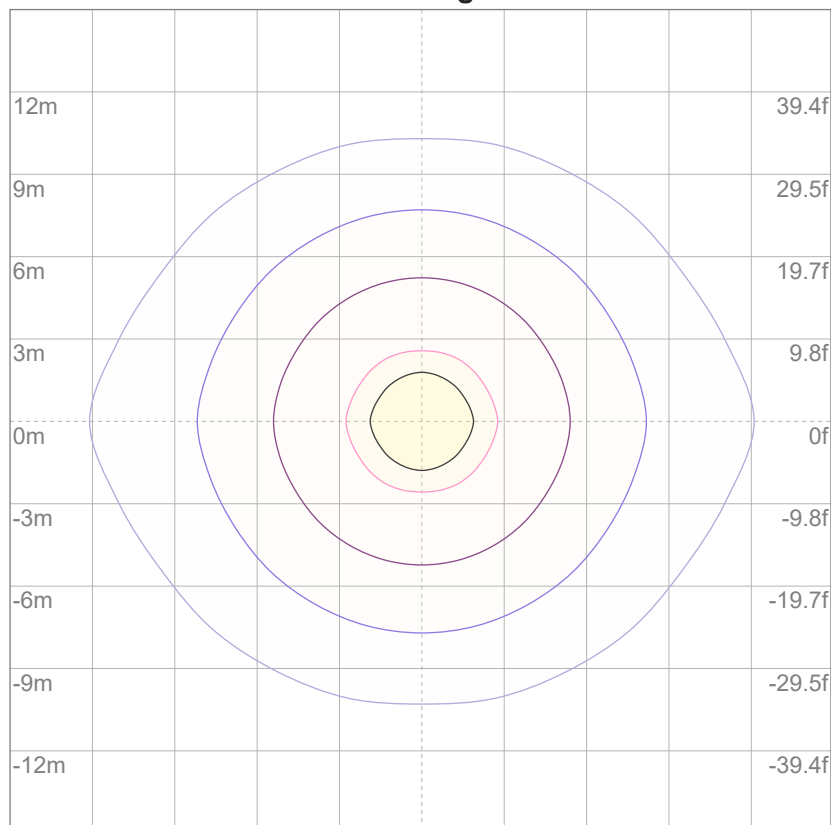

3%	90.5m lx
5%	0.151 lx
10%	0.302 lx
30%	0.905 lx
50%	1.51 lx

Conditions:

Number of c-planes: 12

Lux at center: 3.02 lx

*Lux distribution on a surface  
when lamp is mounted at 10  
meters from the surface.*

Mounting height: 10 meters (33 feet)

**Glare evaluation according to UGR**


p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X      Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	4.0	4.7	4.1	4.9	5.2	6.0	6.7	6.1	6.9	7.2
	3H	4.5	5.4	4.9	5.6	5.8	6.9	7.7	7.3	7.9	8.1
	4H	4.6	5.4	5.0	5.7	5.9	7.3	8.1	7.7	8.4	8.6
	6H	4.8	5.4	5.1	5.8	6.1	7.6	8.3	7.9	8.6	9.0
	8H	4.8	5.4	5.1	5.8	6.2	7.7	8.3	8.0	8.7	9.1
	12H	4.8	5.4	5.1	5.7	6.2	7.6	8.3	8.0	8.6	9.1
4H	2H	4.4	5.1	4.8	5.4	5.6	6.0	6.8	6.4	7.1	7.3
	3H	5.2	5.8	5.5	6.2	6.6	7.2	7.9	7.6	8.2	8.7
	4H	5.3	5.9	5.7	6.3	6.8	7.6	8.2	8.1	8.7	9.2
	6H	5.4	6.0	5.9	6.3	6.7	8.0	8.6	8.5	8.9	9.3
	8H	5.4	6.0	5.9	6.3	6.7	8.0	8.6	8.5	8.9	9.3
	12H	5.4	5.8	5.9	6.2	6.7	8.0	8.4	8.5	8.8	9.3
8H	4H	5.4	5.9	5.9	6.3	6.6	7.6	8.2	8.1	8.5	8.9
	6H	5.5	5.9	6.0	6.4	6.9	8.0	8.4	8.5	8.8	9.4
	8H	5.6	5.9	6.1	6.4	7.1	8.1	8.4	8.6	8.9	9.6
	12H	5.6	5.8	6.2	6.4	7.0	8.1	8.4	8.7	8.9	9.5
12H	4H	5.3	5.8	5.8	6.2	6.7	7.6	8.0	8.1	8.4	8.9
	6H	5.6	5.9	6.1	6.4	7.0	8.0	8.3	8.5	8.8	9.5
	8H	5.6	5.8	6.2	6.4	7.0	8.1	8.3	8.7	8.8	9.4
Variation of the observer position for the luminaire distance S											
S = 1.0H		0.6 / -0.7					0.6 / -0.5				
S = 1.5H		1.6 / -1.1					1.4 / -1.0				
S = 2.0H		2.5 / -2.0					2.2 / -2.0				
CIE 117-1995. Corrected glare indices referring to 94.6 lm total luminous flux											

## Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99
1	113	109	107	104	110	107	105	103	103	101	99	99	98	96	96	94	93	91
2	106	101	97	93	104	99	95	92	96	92	90	93	90	88	90	88	86	84
3	101	94	88	84	99	92	87	83	90	85	82	87	83	81	85	82	79	78
4	96	87	82	77	94	86	81	77	84	79	76	82	78	75	80	77	74	72
5	91	82	76	72	89	81	75	71	79	74	70	77	73	70	76	72	69	68
6	87	77	71	67	85	77	71	67	75	70	66	74	69	66	72	68	65	64
7	83	73	67	63	81	73	67	63	71	66	62	70	65	62	69	65	62	60
8	79	70	64	60	78	69	63	59	68	63	59	67	62	59	66	62	59	57
9	76	66	61	57	75	66	60	57	65	60	56	64	59	56	63	59	56	55
10	73	64	58	54	72	63	58	54	62	57	54	61	57	54	61	57	54	52

LAMPS (number of lamps)

## Luminaire budgetary diagram

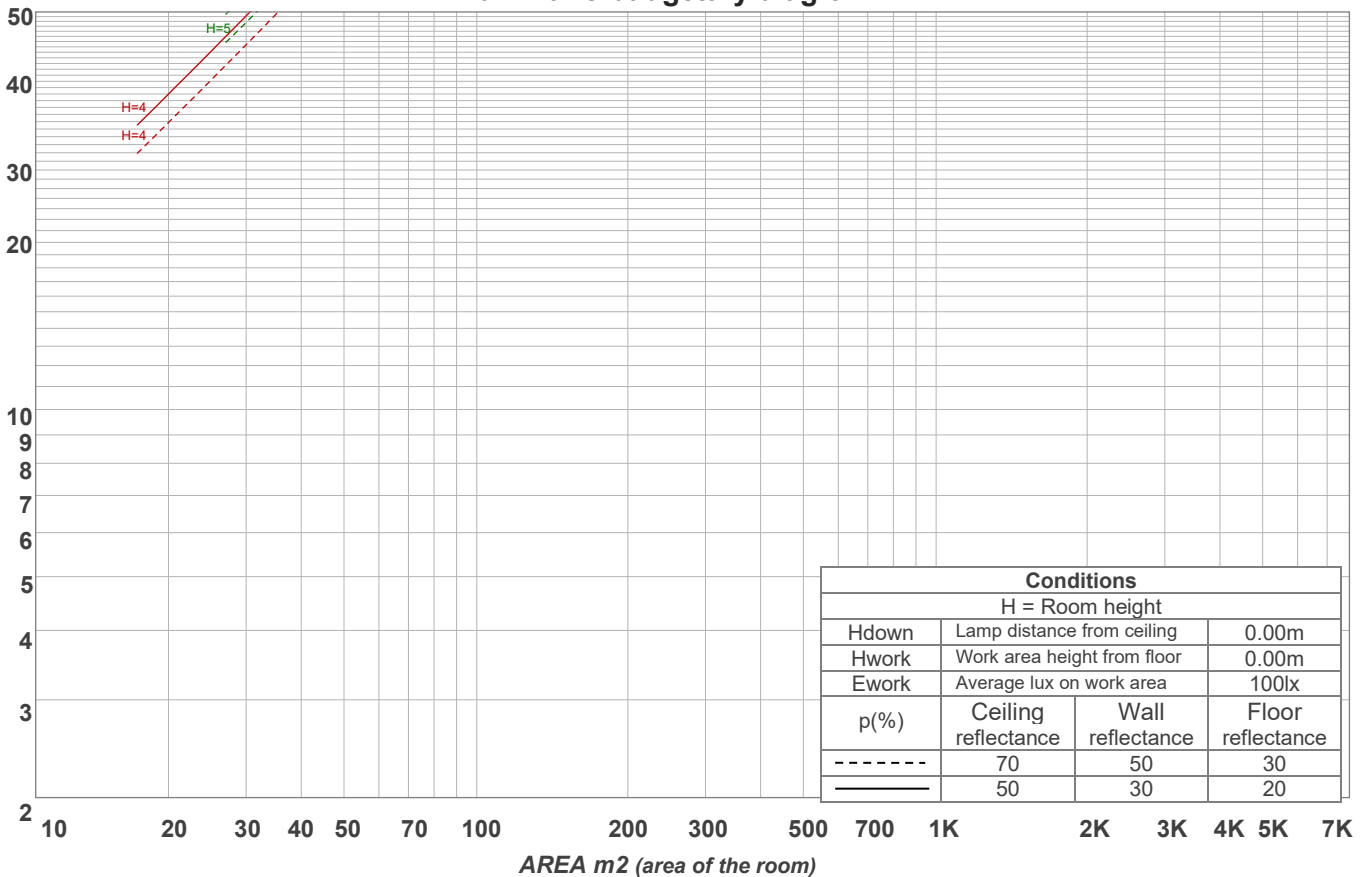


## Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
20.2 lm	25.2 lm	17.1 lm	11.4 lm	7.90 lm	5.87 lm	4.06 lm	1.88 lm	0.346 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
0.094 lm	0.049 lm	0.039 lm	0.086 lm	0.100 lm	0.102 lm	0.068 lm	0.030 lm	0.015 lm

LCS table

BUG rating:	B0 U0 G0	
Forward light	Lumens	Lumens %
Low(0-30):	31.3	33.1%
Medium(30-60):	12.5	13.3%
High(60-80):	3	3.1%
Very high(80-90):	0.2	0.2%
Back light		
Low(0-30):	31.3	33.1%
Medium(30-60):	12.5	13.3%
High(60-80):	3	3.1%
Very high(80-90):	0.2	0.2%
Uplight		
Low(90-100):	0.1	0.1%
High(100-180):	0.5	0.5%

LCS graph

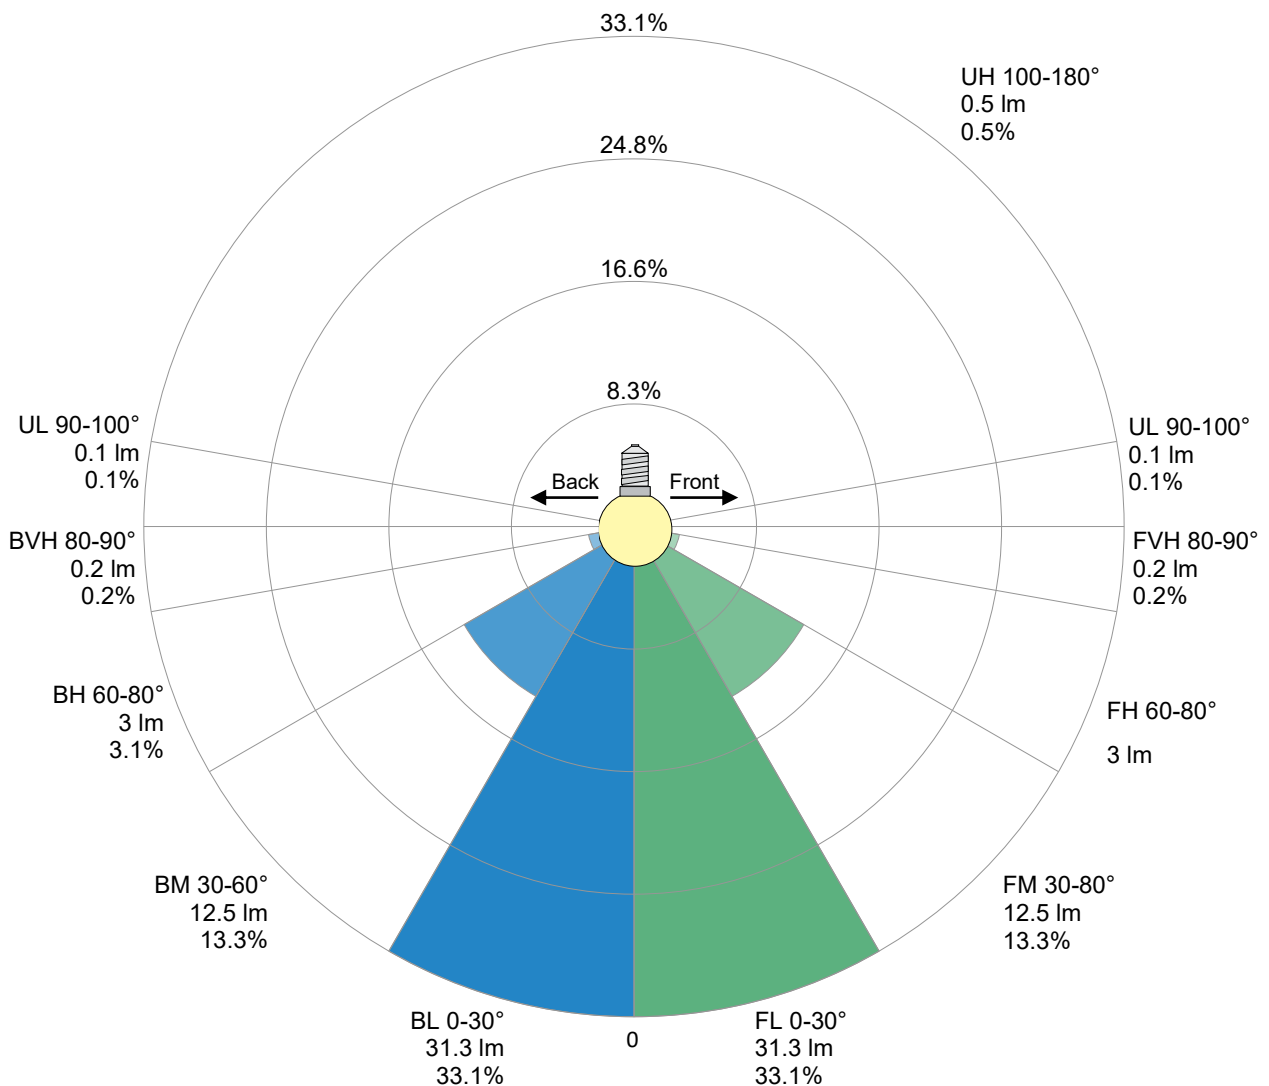





**Flicker curve (complete sampled flicker signal)**



**Flicker frame (frame of one flicker period)**

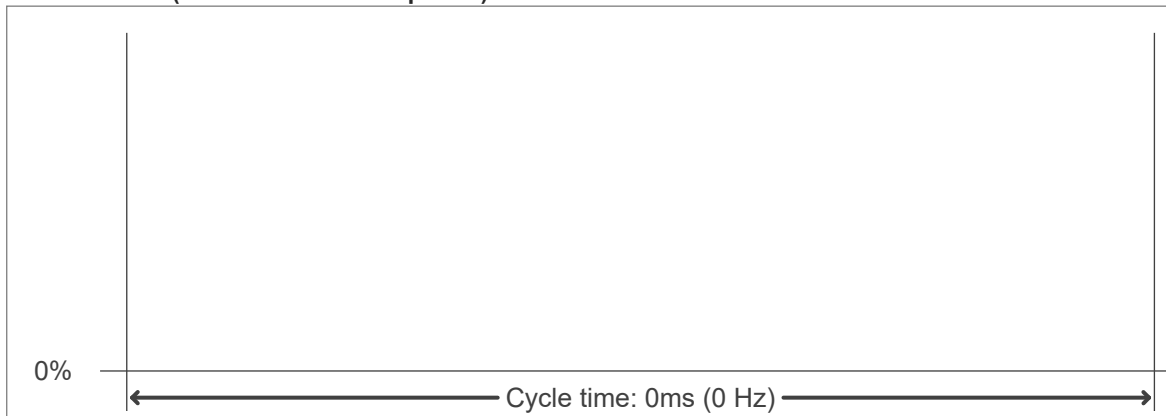

**Flicker FFT (frequency scope of flicker curve)**

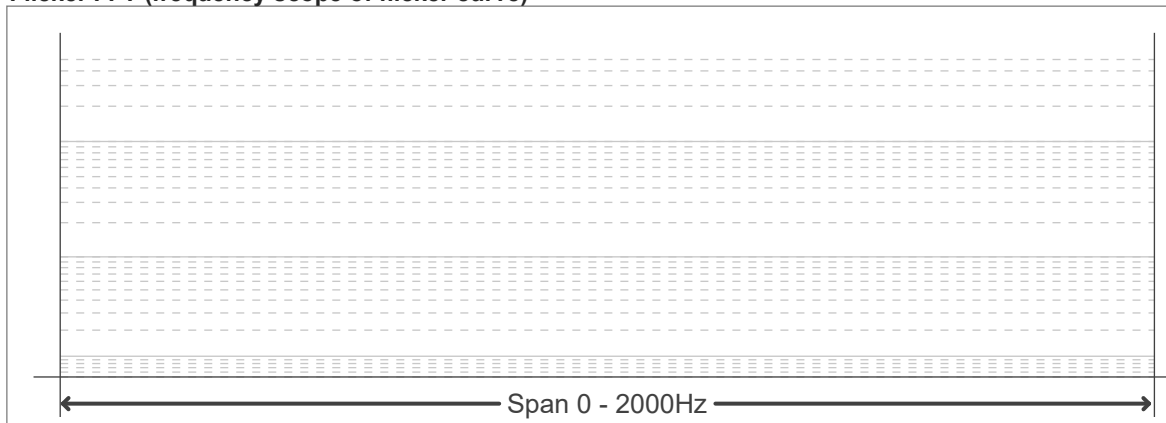

**Flicker results:**

Flicker frequency:		n/a Hz	
Flicker index:	n/a	JA8/10 40Hz	n/a %
Flicker percentage:	n/a %	JA8/10 90Hz	n/a %
SVM: (Visual flicker)	n/a	JA8/10 200Hz	n/a %
PstLM	n/a	JA8/10 400Hz	n/a %
Mp	n/a	JA8/10 1000Hz	n/a %

**Flicker conditions:**

Sample rate:	n/a samples/second
--------------	--------------------