

Test report

Print date 21/01/2026
Light measurement results



Laboratory and Equipment

Test lab
Spectrometer Manufacturer and Model
Measurement date
Operator

Viso LabSpion - serial: 1996407700 sensor serial: 1118720440 - Test lab
LabSpion – Type C, horizontal
27/10/2025
MW

Measurement Conditions

Tested c-planes
Tested gamma resolution
Input Power

12 planes – 30°
0,3°
23,1 W

Tested Light Source

Luminaire
Basic Luminous Shape
Item No.
Manufacturer
Description

NANOFLEX
PANEL
NANOFLEX80677.63010WHBS
Acolyte
Beam Angle: 10 degree, product length : 1m

Main Light Measurement Results

Output – Total Lumen (Up% / Down%)
Efficiency
Peak Intensity
Correlated Color Temperature, CCT
Color Rendering Index
Dominant Wavelength
Peak Wavelength


1991 lm – 0,74% / 99,26%
86 lm/W
34039 cd
2902 K
CRI 82,9
584 nm
605 nm

Lumen per length
Watt per length

1991,42 lm/m 606,98 lm/ft
23,11 W/m 7,04 W/ft


Polar light distribution diagram

Unit: 0-100% of peak intensity

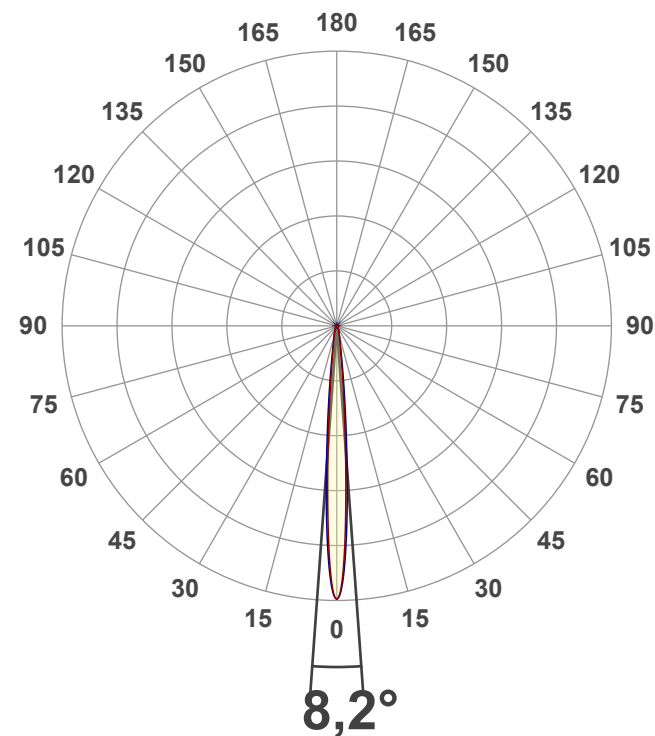

— C0 - C180
— C90 - C270

$\eta = 100.0\%$

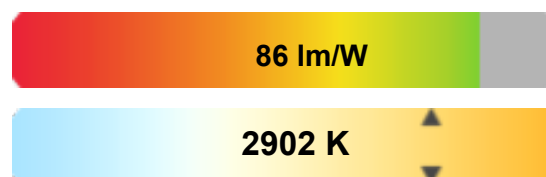

Product photo



Test report

Print date 21/01/2026
Light measurement results



Color Parameters


Correlated Color Temperature, Target
Correlated Color Temperature, Measured
Color Rendering Index
Color Rendering Index, R9 (red)
Color Rendering TM30-18

CCT = 2902 K
CCT = 2902 K
CRI 82,9
R9 = 10,1
Rf 83,7
Rg 92,0


MacAdam Steps
Color deviation from BBL
Color coordinates CIE 1931
Color coordinate CIEs 1960
Color coordinate CIEs 1976
Color Quality Scale

SDCM = n/a
Duv = -0,0006
(x;y) = (0,443;0,405)
(u;v) = (0,254;0,348)
(u';v') = (0,254;0,523)
CQS = 82,3


CIE 1931 Chromaticity diagram

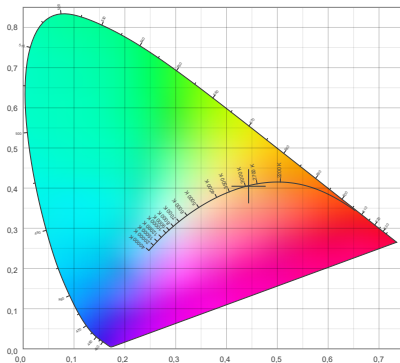


CIE 1931 Chromaticity - zoomed

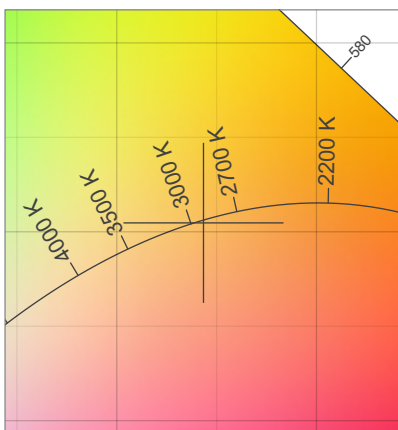


CIE 1931 Chromaticity - SDCM

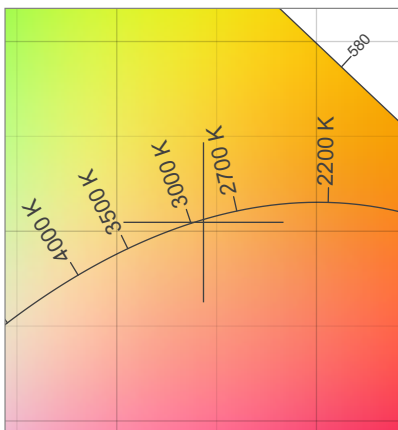

Spectral power distribution

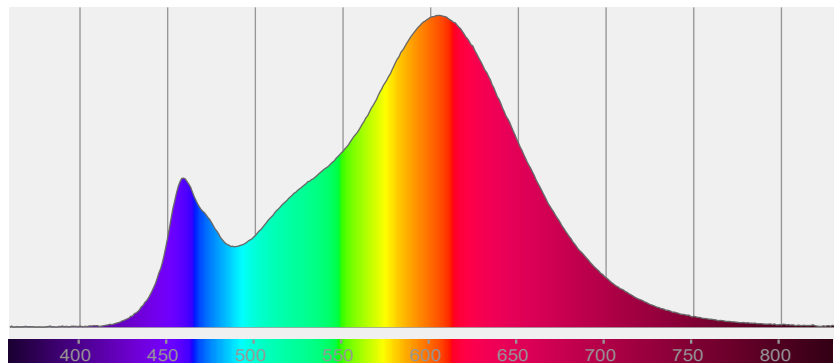


Color Rendering Index per reference color (CIE 1995)

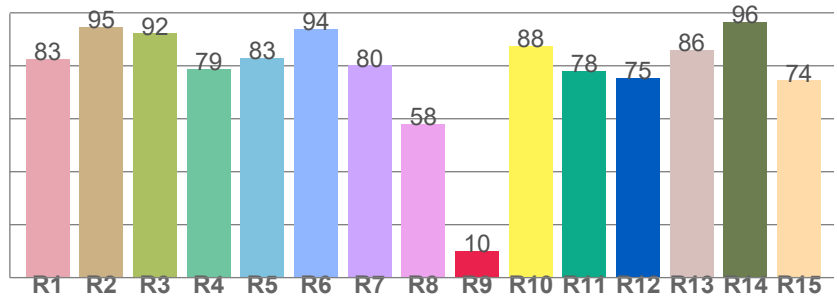

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
82,7	94,7	92,2	78,9	82,8	93,9	80,1	58,0	10,1	87,6	78,0	75,4	86,0	96,5	74,5

TM30-18 Rf-values per hue bin

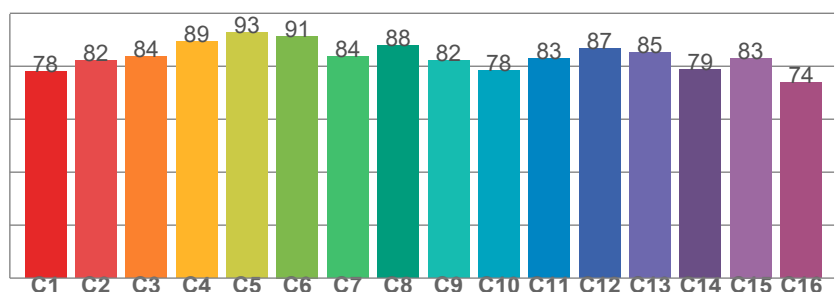

TM30-18 Rf-values per hue bin

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
78,0	82,0	83,6	89,5	92,8	91,4	83,5	88,0	82,2	78,2	83,0	86,8	85,1	78,7	83,1	74,0


Test report

Print date 21/01/2026
Light measurement results



Color details - ANSI/IES TM-30-18 Color Rendition Report

Color Vector Graphic

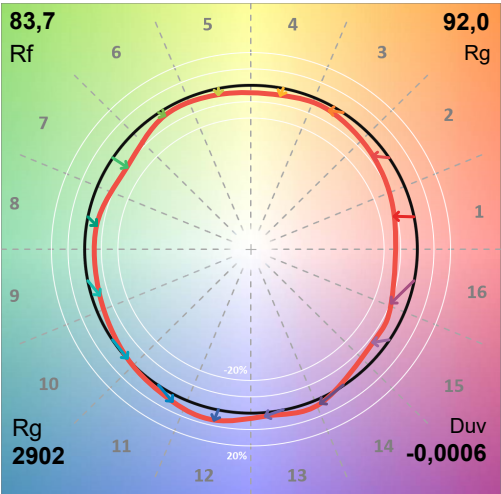

Color Distortion Graphic




CIE x 0,443
CIE y 0,443
CIE u' 0,254
CIE v' 0,523

CIE 13.3-1995

Ra 82,9


R9 10,1

Color Rendition by Color Evaluation Sample (CES)

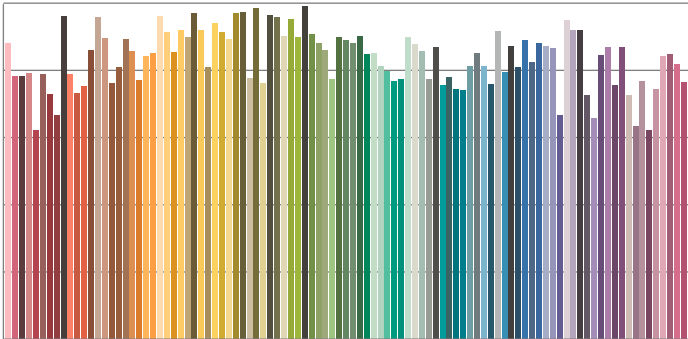


Color evaluation sample CES01 through CES99

Local Color Fidelity (per hue bin)

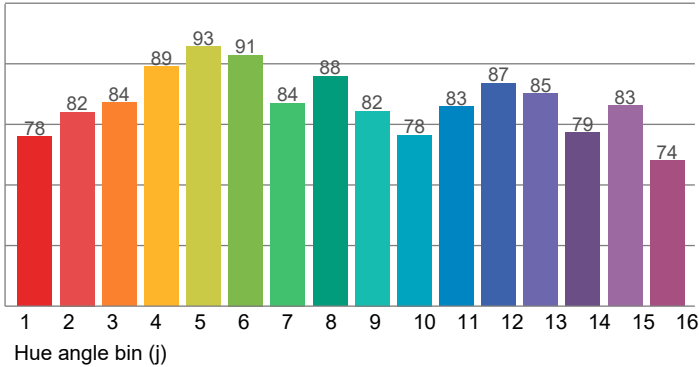

Local Chroma Shift (per hue bin)

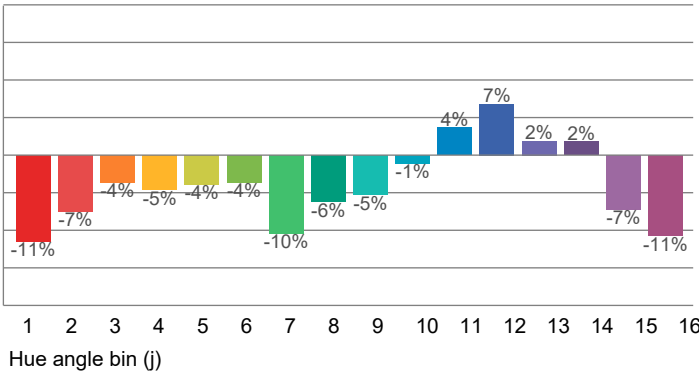


Test report

Print date 21/01/2026
Light measurement results



Color Rendering Index (CQS)

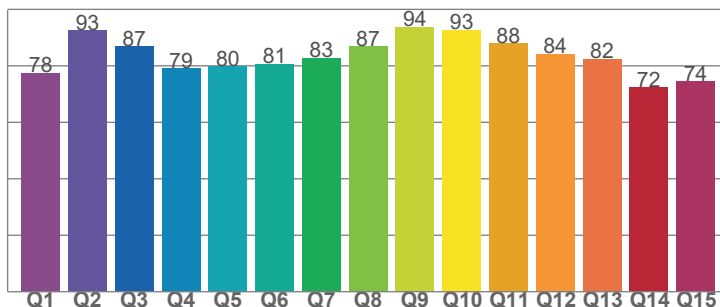

Q1	77,52	Q9	93,82
Q2	92,54	Q10	92,77
Q3	86,85	Q11	87,92
Q4	79,19	Q12	84,27
Q5	79,83	Q13	82,50
Q6	80,74	Q14	72,40
Q7	82,86	Q15	74,41
Q8	86,91	CQS	82,32

Hue Bin	Rf	Shifts (%)	
		Chroma	Hue
1	78	-11%	3%
2	82	-7%	6%
3	84	-4%	8%
4	89	-5%	1%
5	93	-4%	1%
6	91	-4%	-2%
7	84	-10%	0%
8	88	-6%	4%
9	82	-5%	10%
10	78	-1%	14%
11	83	4%	12%
12	87	7%	-1%
13	85	2%	-11%
14	79	2%	-18%
15	83	-7%	-7%
16	74	-11%	-16%

Rg 92,0


Gamut Index Rf

Gamut index

Rf 83,7

Fidelity Index Rf

Gamut Index vs. Fidelity

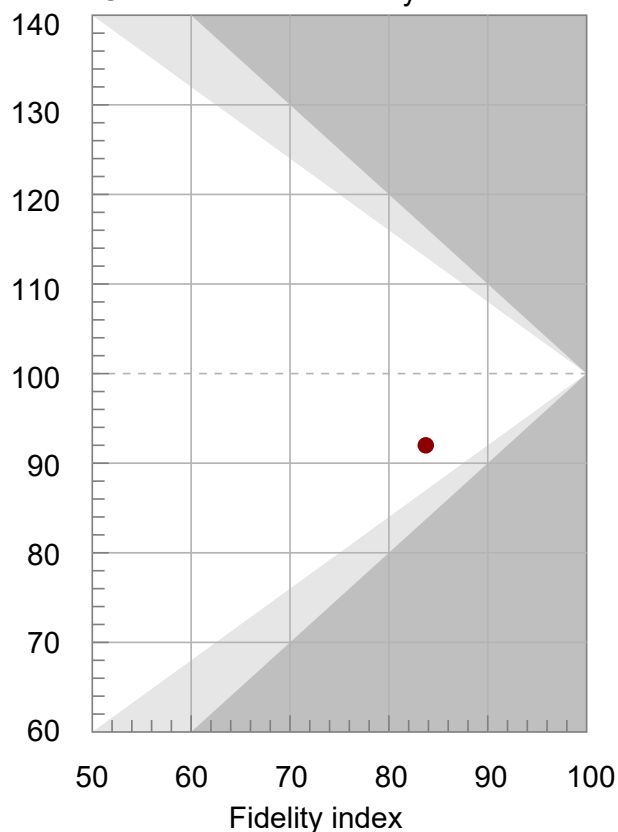


Test report

Print date 21/01/2026
Light measurement results



Luminous Intensity diagram

Unit: 0-100% of peak intensity

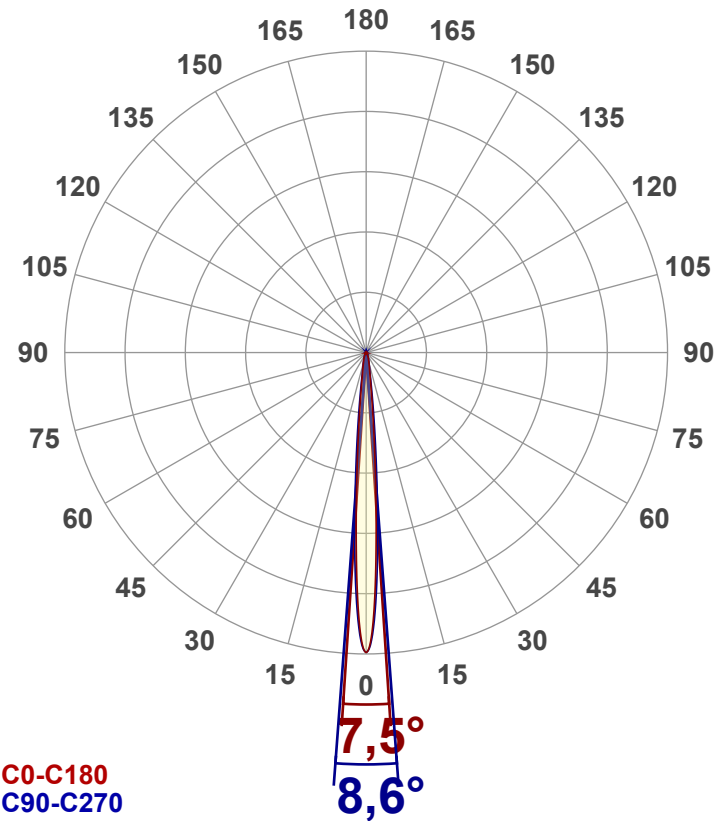

Main Values


Output (total Lumen)	1991 lm
Lumen Up% / Down%	0,74% / 99,26%
Peak Intensity	34039 cd
Beam Angle (50%-FWHM)	8,24°
Field Angle (10%-FWHM)	17,84°
Cutoff Angle (2.5%-FWHM)	{c_ANG/0.00}°

Intensity Ratios

In 120° cone	1991,4
In 90° cone	607,0

Linear distribution diagram


Intensity [cd]

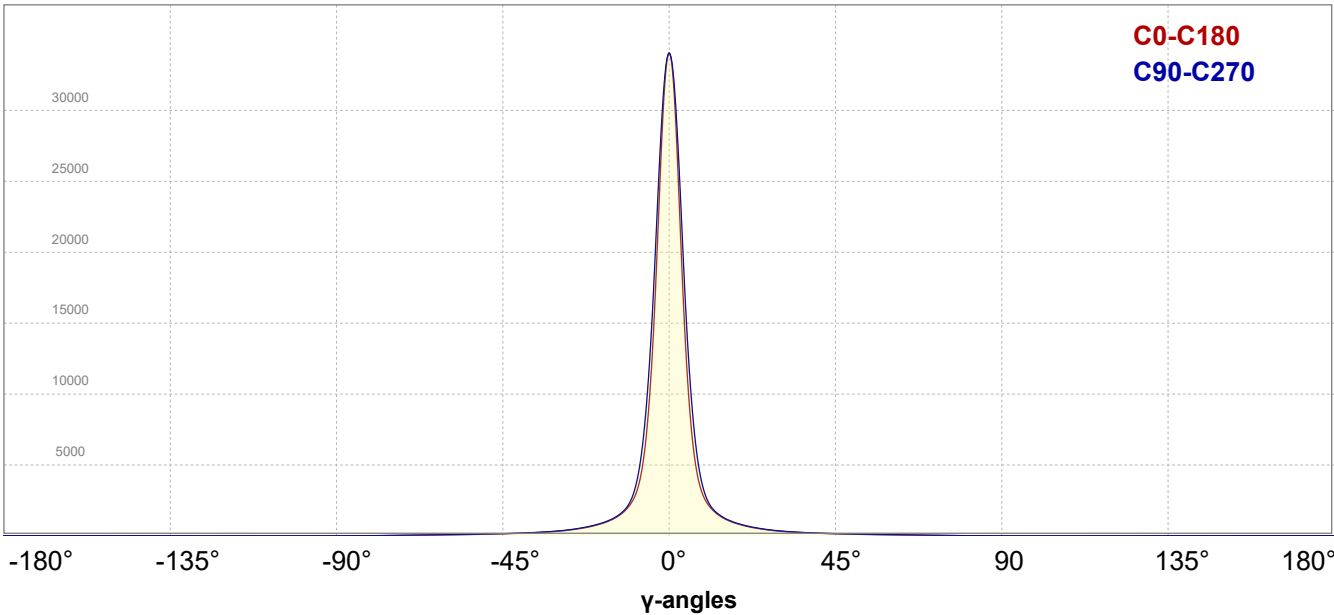


Test report

Print date 21/01/2026
Light measurement results

Iso-intensity Diagram (Iso-candela)

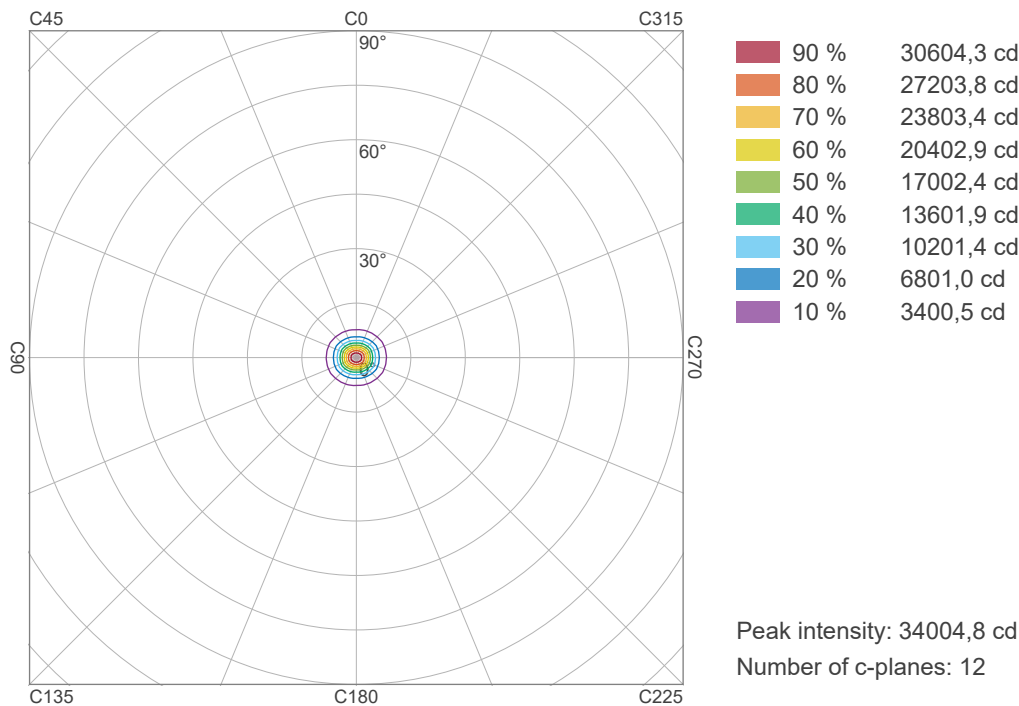

Iso-illuminance Diagram (Iso-lux)

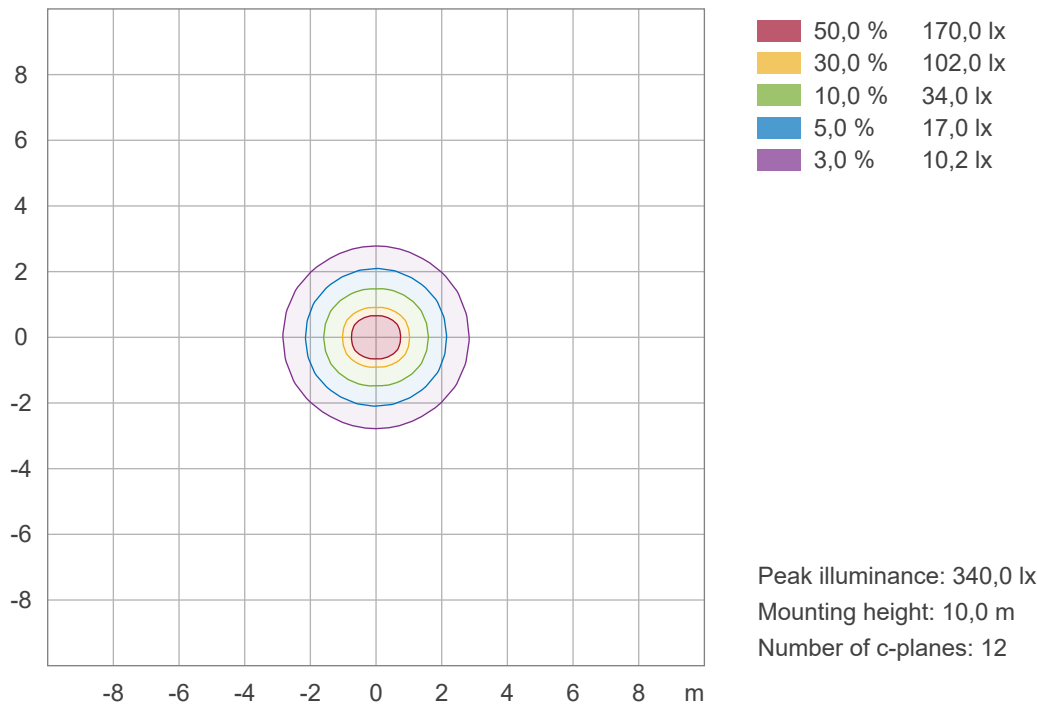


Test report

Print date 21/01/2026
Light measurement results




Beam details

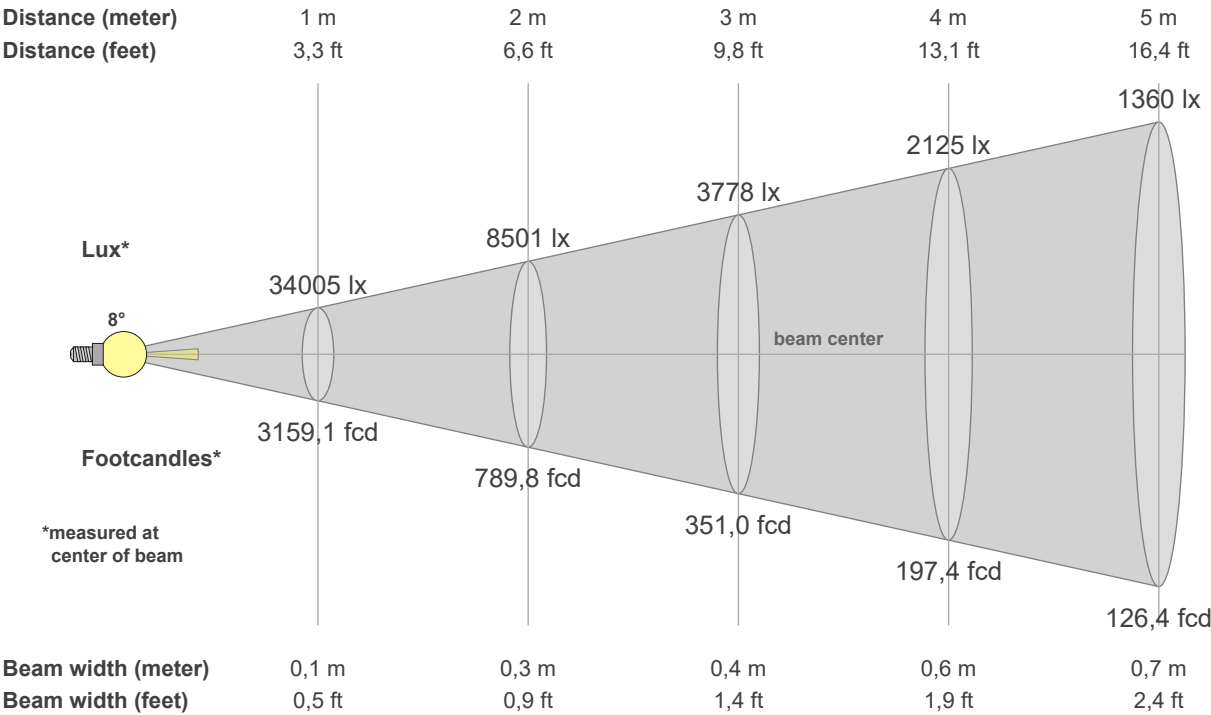

Luminaire budgetary diagram

LAMPS (number of lamps)

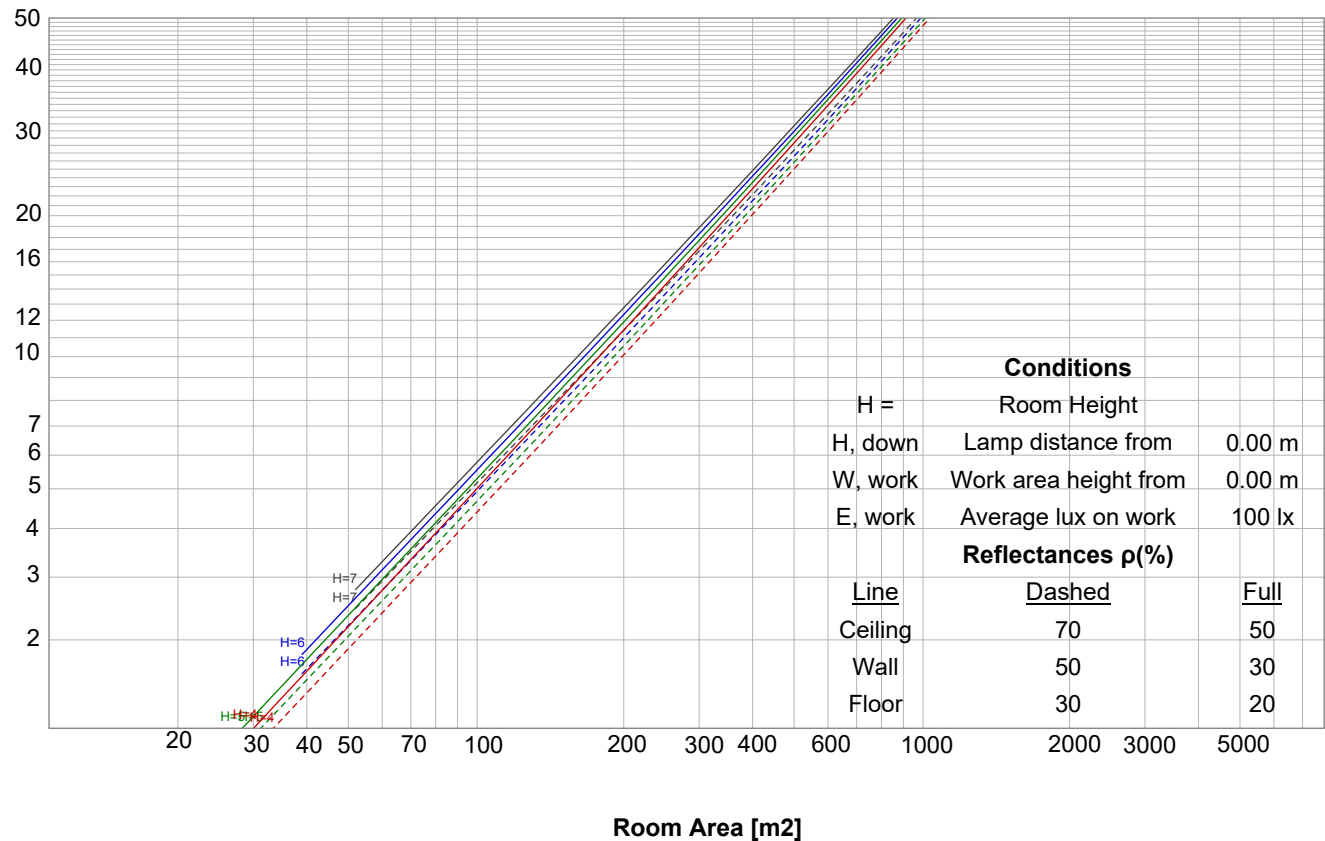

Test report

Print date 21/01/2026
Light measurement results



Intensity details

Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3,3	6,6	9,8	13,1	16,4	19,7	23	26,2	29,5	32,8	36,1	39,4	42,7	45,9	49,2	52,5	55,8	59,1	62,3	65,6	ft
34005	8501	3778	2125	1360	945	694	531	420	340	281	236	201	173	151	133	118	105	94	85	lux
3159,1	789,8	351	197,4	126,4	87,8	64,5	49,4	39	31,6	26,1	21,9	18,7	16,1	14	12,3	10,9	9,8	8,8	7,9	fc

Intensities in 0° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°	γ
34,0k	32,4k	27,9k	21,6k	15,6k	10,9k	7,6k	5,3k	3,9k	3,0k	2,4k	2,0k	1,8k	1,5k	1,4k	1,2k	1,1k	1,0k	0,9k	0,8k	cd
100%	95%	82%	64%	46%	32%	22%	16%	11%	9%	7%	6%	5%	5%	4%	4%	3%	3%	3%	2%	of 0°val

Intensities in 90° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°	γ
34,0k	32,8k	29,3k	24,2k	18,5k	13,5k	9,7k	6,9k	4,9k	3,6k	2,7k	2,2k	1,8k	1,6k	1,4k	1,3k	1,1k	1,0k	0,9k	0,8k	cd
100%	96%	86%	71%	54%	40%	29%	20%	14%	11%	8%	6%	5%	5%	4%	4%	3%	3%	3%	2%	of 0°val

Intensities in 180° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°	γ
34,0k	32,4k	27,9k	21,6k	15,6k	10,9k	7,6k	5,3k	3,9k	3,0k	2,4k	2,0k	1,8k	1,5k	1,4k	1,2k	1,1k	1,0k	0,9k	0,8k	cd
100%	95%	82%	64%	46%	32%	22%	16%	11%	9%	7%	6%	5%	5%	4%	4%	3%	3%	3%	2%	of 0°val

Intensities in 270° c-plane

0°	1°	2°	3°	4°	5°	6°	7°	8°	9°	10°	11°	12°	13°	14°	15°	16°	17°	18°	19°	γ
34,0k	32,8k	29,3k	24,2k	18,5k	13,5k	9,7k	6,9k	4,9k	3,6k	2,7k	2,2k	1,8k	1,6k	1,4k	1,3k	1,1k	1,0k	0,9k	0,8k	cd
100%	96%	86%	71%	54%	40%	29%	20%	14%	11%	8%	6%	5%	5%	4%	4%	3%	3%	3%	2%	of 0°val

Test report

Print date 21/01/2026
Light measurement results

IESNA TM-15-07 LUMINAIARE CLASSIFICATION SYSTEM FOR OUTDOOR

Forward Light

Low (0-30°)	749,3	lm	37,6%
Medium (30-60°)	185,7	lm	9,3%
High (60-80°)	49	lm	2,5%
Very High (80-90°)	4,3	lm	0,2%

Back Light

Low (0-30°)	749,2	lm	37,6%
Medium (30-60°)	185,7	lm	9,3%
High (60-80°)	49	lm	2,5%
Very High (80-90°)	4,3	lm	0,2%


Uplight

Low (90-100°)	0,5	lm	0%
High (100-180°)	14,4	lm	0,7%

Total

Sum	1991,4	lm	100%
------------	--------	----	------

BUG RATING B2 U2 G0

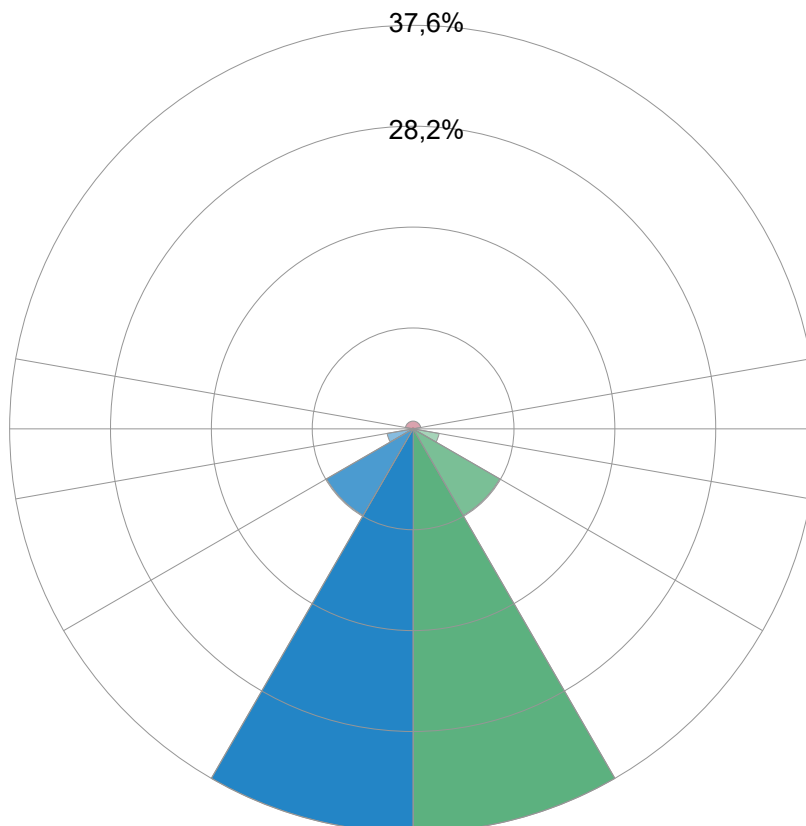

Test report

Print date 21/01/2026
Light measurement results



UGR Table

Corrected, comprehensive UGR table according to 117-1995, S/H ratio=0.25

Reflectances		ρ Ceiling	70	70	50	50	30	70	70	50	50	30
		ρ Walls	50	30	50	30	30	50	30	50	30	30
		ρ Floor	20	20	20	20	20	20	20	20	20	20
Room size			Viewed Crosswise					Viewed Endwise				
H = mounting height above eye level			(Viewing direction orthogonal to lamp length axis)					(Viewing direction parallel to lamp length axis)				
X	Y											
2H	2H	12,5	13,1	12,6	13,3	13,5	14,3	14,8	14,4	15,1	15,3	
	3H	13,1	13,8	13,5	14,1	14,2	15,4	16,1	15,7	16,3	16,5	
	4H	13,4	14,1	13,8	14,3	14,6	15,8	16,5	16,2	16,7	17,0	
	6H	13,6	14,1	13,9	14,5	14,8	16,2	16,7	16,5	17,0	17,4	
	8H	13,6	14,1	13,9	14,5	14,9	16,2	16,8	16,6	17,1	17,5	
	12H	13,5	14,1	13,9	14,4	14,9	16,2	16,8	16,6	17,1	17,6	
4H	2H	12,9	13,6	13,3	13,8	14,1	14,4	15,1	14,8	15,3	15,6	
	3H	13,9	14,4	14,2	14,8	15,2	15,8	16,3	16,2	16,7	17,1	
	4H	14,1	14,6	14,5	15,1	15,6	16,3	16,8	16,7	17,2	17,7	
	6H	14,3	14,8	14,8	15,2	15,5	16,6	17,2	17,1	17,5	17,9	
	8H	14,3	14,8	14,8	15,1	15,5	16,7	17,2	17,2	17,6	17,9	
	12H	14,3	14,7	14,8	15,1	15,5	16,7	17,1	17,2	17,5	18,0	
8H	4H	14,3	14,8	14,8	15,1	15,5	16,3	16,8	16,8	17,1	17,5	
	6H	14,5	14,9	15,0	15,3	15,9	16,7	17,0	17,2	17,5	18,0	
	8H	14,6	14,9	15,1	15,4	16,0	16,9	17,1	17,4	17,7	18,3	
	12H	14,6	14,8	15,2	15,3	15,9	16,9	17,1	17,5	17,7	18,3	
12H	4H	14,2	14,6	14,8	15,0	15,5	16,2	16,6	16,7	17,0	17,5	
	6H	14,6	14,8	15,1	15,4	16,0	16,7	17,0	17,2	17,5	18,1	
	8H	14,6	14,8	15,2	15,4	16,0	16,8	17,1	17,4	17,6	18,2	
Variations with the observer position for the luminaire spacings, S:												
S = 1.0H		0,4 / -0,5					0,3 / -0,3					
S = 1.5H		1,0 / -0,9					0,9 / -0,7					
S = 2.0H		1,6 / -1,7					1,5 / -1,4					

Coefficients of utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20
RCR (Room Cavity Ratio)																		
Room values are expressed as percentage of Lumen delivered to the task surface																		
0	118,9	118,9	118,9	118,9	116,0	116,0	116,0	116,0	110,7	110,7	110,7	105,8	105,8	105,8	101,4	101,4	101,4	99,3
1	113,6	110,9	108,5	106,4	111,1	108,7	106,6	104,6	104,5	102,8	101,3	100,7	99,4	98,1	97,2	96,1	95,2	93,4
2	108,6	104,0	100,3	97,1	106,3	102,3	98,9	96,0	99,0	96,2	93,8	95,9	93,6	91,7	93,1	91,3	89,7	88,0
3	104,1	98,3	93,8	90,2	102,1	96,8	92,7	89,4	94,2	90,7	87,9	91,7	88,8	86,5	89,4	87,1	85,1	83,5
4	100,0	93,4	88,5	84,8	98,3	92,3	87,8	84,3	90,1	86,3	83,2	88,1	84,8	82,2	86,2	83,5	81,2	79,8
5	96,4	89,3	84,3	80,6	94,9	88,3	83,7	80,2	86,6	82,5	79,4	84,9	81,4	78,7	83,3	80,4	78,0	76,7
6	93,2	85,7	80,7	77,1	91,8	85,0	80,3	76,9	83,5	79,4	76,3	82,1	78,5	75,7	80,8	77,7	75,2	74,0
7	90,3	82,7	77,7	74,3	89,1	82,0	77,4	74,1	80,8	76,6	73,6	79,6	76,0	73,2	78,5	75,3	72,8	71,6
8	87,6	80,0	75,2	71,9	86,6	79,4	74,9	71,7	78,4	74,3	71,4	77,4	73,7	71,0	76,5	73,2	70,7	69,6
9	85,3	77,6	72,9	69,8	84,3	77,1	72,7	69,6	76,3	72,2	69,4	75,4	71,8	69,1	74,6	71,3	68,9	67,8
10	83,1	75,5	71,0	68,0	82,2	75,1	70,8	67,9	74,3	70,4	67,7	73,6	70,0	67,5	72,9	69,6	67,3	66,2

Test report

Print date 21/01/2026
Light measurement results




Power details

Input power

Frequency of input power	0 Hz
Power feed to light source	23,1 W
RMS Input voltage feed V,RMS	24,0 V
RMS Input current feed I,RMS	0,963 A
Volt-Amp or apparent power =	23,11 VA
Displacement factor of AC power feed	0,68
Power factor of AC current feed	1,0
Total harmonic distortion of the current	0%
Total harmonic distortion of the voltage	0%

Input power curve



Efficiency

Radiated power efficiency 26,6%

Lumen efficiency 86 lm/W

Stabilization details

Warmup Conditions

Stable period	n/a
Stable change max	n/a%
Minimum time	n/a

Color Temperature Change

CCT start	n/a K
CCT shift	n/a K
CCT end	2902 K


Warmup Result

Total warmup time	n/a
Warmup variation	n/a%

Output Change

Output start	n/a lm
Output change	n/a lm
Output end	1991 lm

Stabilization Curve

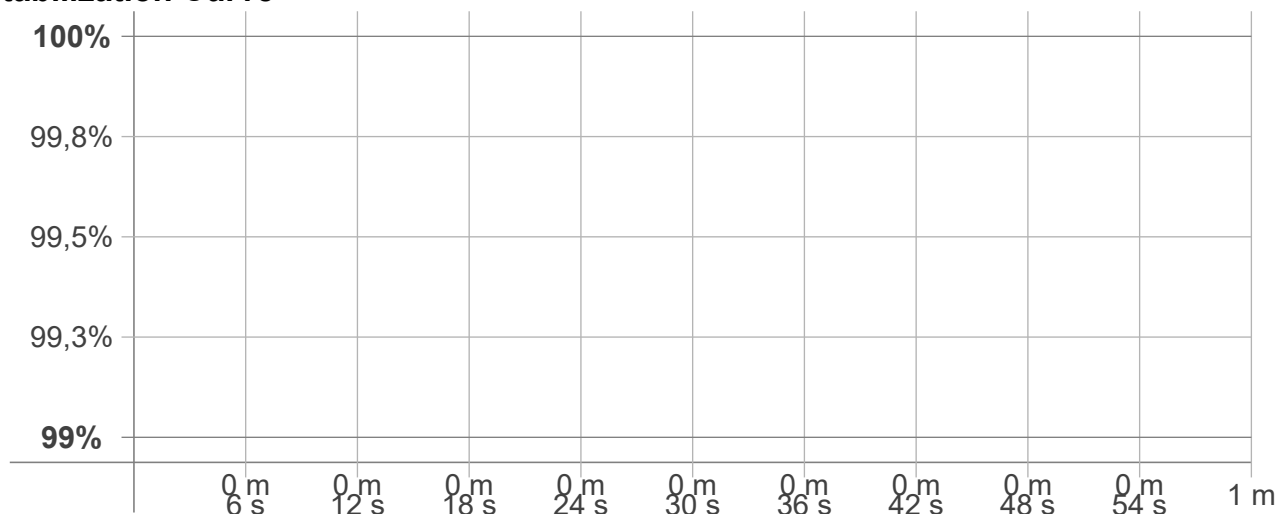

Test report


Print date 21/01/2026
Light measurement results




Flicker TLA details

Flicker Meter Type	Viso Systems LabFlicker	Measurement time	
Frequency of input power	0 Hz	PstLM	180 sec.
Flicker/TLA sample rate	n/a samples/s	All other indices	1,5 sec,
Flicker indices according to Illuminating Engineering Society		Flicker indices according to California Energy Commission (CEC)	
Flicker frequency	n/a Hz	JA8/10 40 Hz	n/a %
Percent Flicker	n/a %	JA8/10 90 Hz	n/a %
Flicker index	n/a	JA8/10 200 Hz	n/a %
		JA8/10 400 Hz	n/a %
		JA8/10 1000 Hz	n/a %
TLA indices (re IEC TR 61547-1, IEC 61000-3-3 and IEC		Flicker indices according to Lighting Research Center (2015)	
PstLM value (F < 80 Hz)	n/a	Perception metric, Assist Mp	n/a
SVM value (80 < F < 2000 Hz)	n/a		

Flicker frame (frame of one flicker period in time domain)

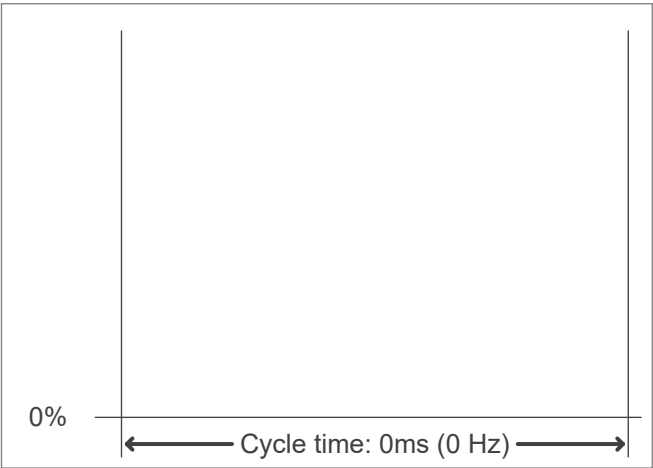

Flicker FFT (flicker curve in frequency domain)

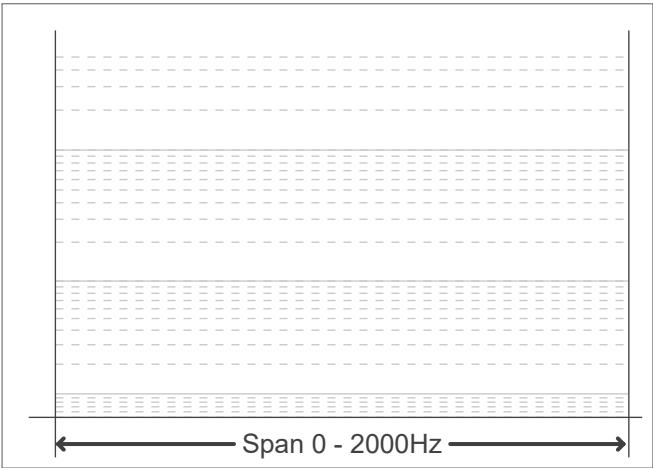

IEEE 1789 Frequency/modulation plot

