


FLEXIBLE BACKLYTE


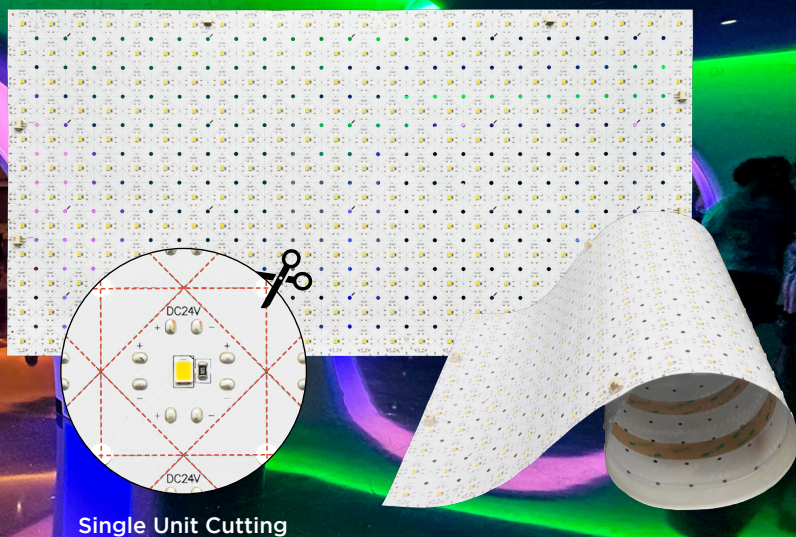


Single Unit Cutting

Flexible BackLyte is engineered to backlight translucent objects such as onyx, stone and resin panels – even in curved applications! Each nominal 1x2 ft (304.8 x 609.6 mm) panel features small cuttable sections that let you create custom shapes. Bend, cut and connect Flexible BackLyte to match the size and shape of your custom project.



STATIC WHITE

- (2700K, 3000K, 3500K, 4000K, 5000K, 6500K)
- 22 W/sheet (11 W/sq ft, 118.4 W/sq m)
- 1650 lm/sq ft (17761 lm/sq m),
- 150 lm/W at 4000K
- 12x24 cuttable grid: 1 in. (25.4 mm) squares
- (Title 24, JA8 compliant from 2700K-4000K)
- Min. bending radius: 1.91 in. (48.5 mm)

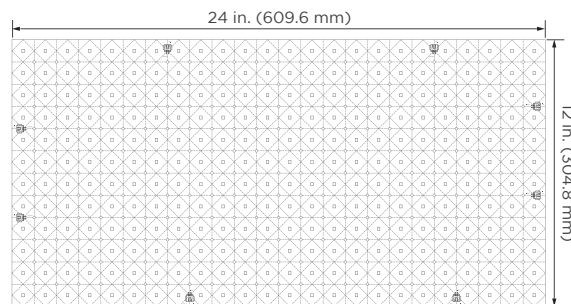



VARIABLE WHITE

- (2700K-6500K)
- 37.2 W/sheet (18.6 W/sq ft, 200.21 W/sq m)
- 2693 lm/sq ft (28987 lm/sq m), 145 lm/W (all on)
- Tune for brightness and CCT
- 11x22 cuttable grid: 1.09 in. (27.7 mm) squares or 0.77 in. (19.6 mm) diamonds
- Min. bending radius: 1.91 in. (48.5 mm)

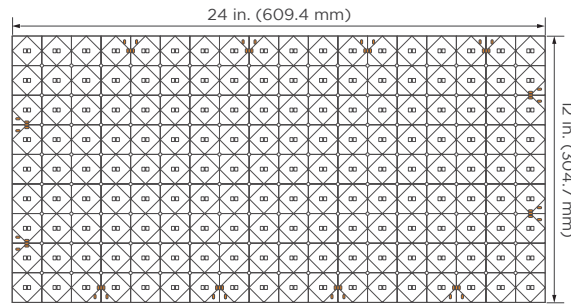

RGBW

- RGBW (3000K, 4000K, 6000K)
- 48 W/sheet (24 W/sq ft, 258.34 W/sq m)
- 1281.5 lm/sq ft (13794 lm/sq m), 53 lm/W (all on)
- 10x20 cuttable grid: 1.2 in. (30.5 mm) square
- Min. bending radius: 1.91 in. (48.5 mm)

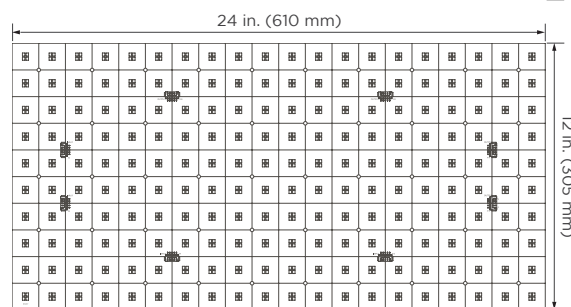

PIXEL RGB

- 128 RGB pixels per sheet spaced at 1.5 in. (38.1 mm)
- Program each individual LED pixel
- Uses SPI controls
- 45 W/sheet (22.5 W/sq ft, 242.2 W/sq m)
- 837.5 lm/sq ft (9014.77 lm/sq m), 38.5 lm/W (all on)
- 10x20 cuttable grid: 3 in. (76.2 mm) square
- Min. bending radius: 3.94 in. (100 mm)

