

Test report

Print date 4/2/2026
Light measurement results



Laboratory and Equipment

Test lab
Spectrometer Manufacturer and Model
Measurement date
Operator

Viso BaseSpion - serial: 2667583511 sensor serial: 0946748350 - Test lab
BaseSpion – Type C, horizontal
4/2/2026
MJV

Measurement Conditions

Tested c-planes
Tested gamma resolution
Input Power

12 planes – 30.00°
5.00°
3.72 W

Tested Light Source

Luminaire
Basic Luminous Shape
Item No.
Manufacturer
Description

ChannelART 30x30 mm MK AcoLyte Static White 3.0 3000K
PANEL
CHAART3030M-RB90SWS2203.030
GENLEDBrands
Channel supplied by ART for test

Main Light Measurement Results

Output – Total Lumen (Up% / Down%)
Efficiency
Peak Intensity
Correlated Color Temperature, CCT
Color Rendering Index
Dominant Wavelength
Peak Wavelength


195.4 lm – 1.573% / 98.43%
52.55 lm/W
66.34 cd
2967 K
CRI 96.1
585 nm
623 nm

Lumen per length
Watt per length

488.62 lm/m 148.93 lm/ft
9.30 W/m 2.83 W/ft


Polar light distribution diagram

Unit: 0-100% of peak intensity

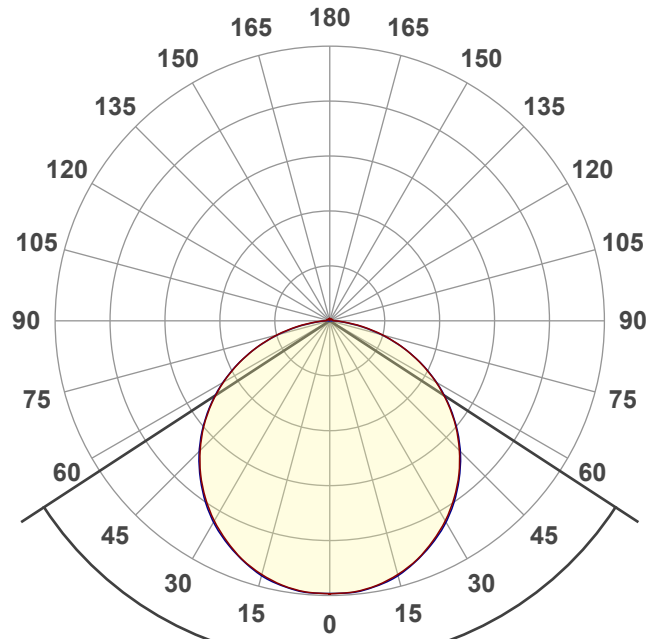

— C0 - C180
— C90 - C270

$\eta = 100\%$

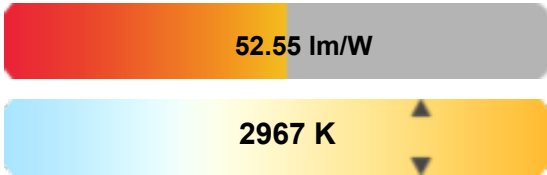

Product photo



Test report

Print date 4/2/2026
Light measurement results



Color Parameters


Correlated Color Temperature, Target
Correlated Color Temperature, Measured
Color Rendering Index
Color Rendering Index, R9 (red)
Color Rendering TM30-18

CCT = 2967 K
CCT = 2967 K
CRI 96.1
R9 = 74.2
Rf 92.0
Rg 101.7


MacAdam Steps
Color deviation from BBL
Color coordinates CIE 1931
Color coordinate CIEs 1960
Color coordinate CIEs 1976
Color Quality Scale

SDCM = NaN
Duv = -0.0028
(x;y) = (0.4353;0.3965)
(u;v) = (0.2529;0.3454)
(u';v') = (0.2529;0.5181)
CQS = 92.3


CIE 1931 Chromaticity diagram

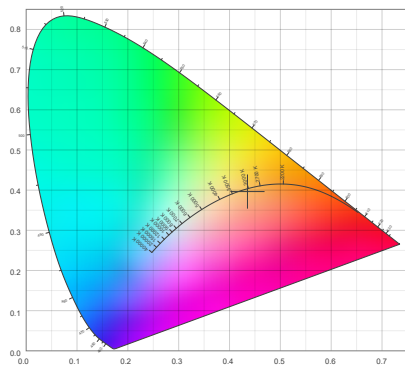


CIE 1931 Chromaticity - zoomed

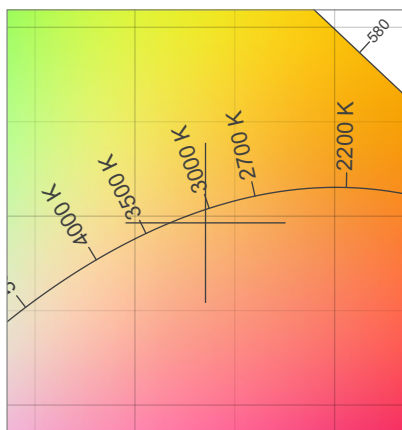


CIE 1931 Chromaticity - SDCM

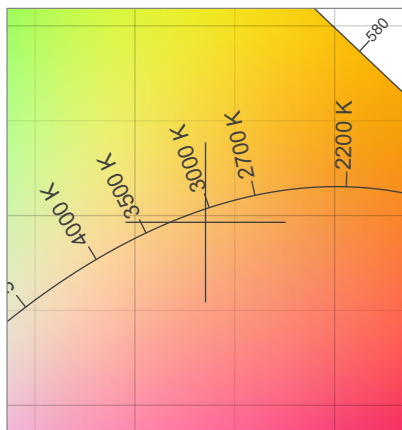

Spectral power distribution

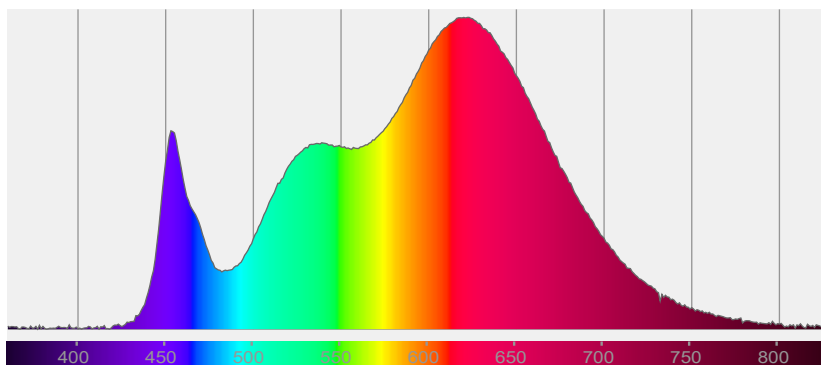


Color Rendering Index per reference color (CIE 1995)

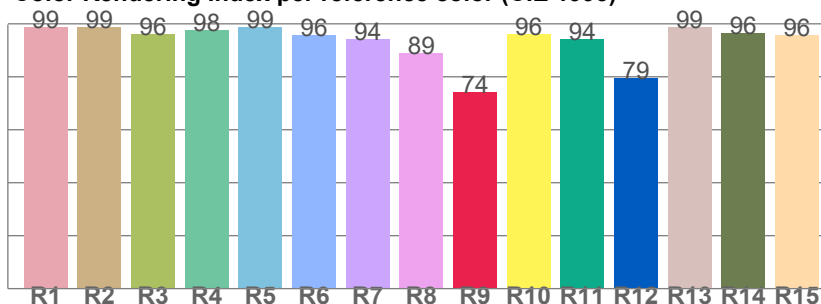

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
98.8	98.9	96.2	97.8	98.8	95.6	94.1	88.9	74.2	96.1	94.2	79.4	98.7	96.4	95.8

TM30-18 Rf-values per hue bin

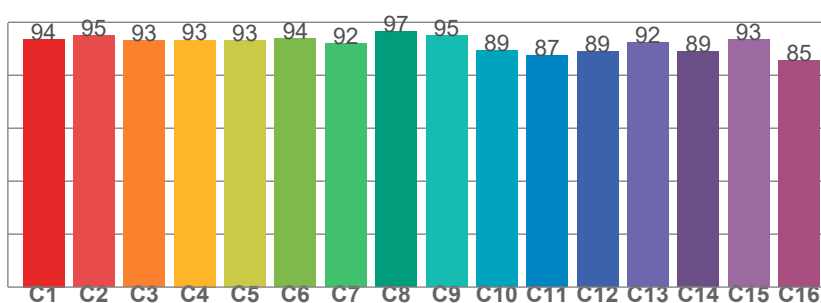

TM30-18 Rf-values per hue bin

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
93.7	95.1	93.0	93.3	93.0	93.8	92.0	96.6	95.1	89.3	87.4	89.1	92.4	88.9	93.5	85.5


Test report

Print date 4/2/2026
Light measurement results



Color details - ANSI/IES TM-30-18 Color Rendition Report

Color Vector Graphic

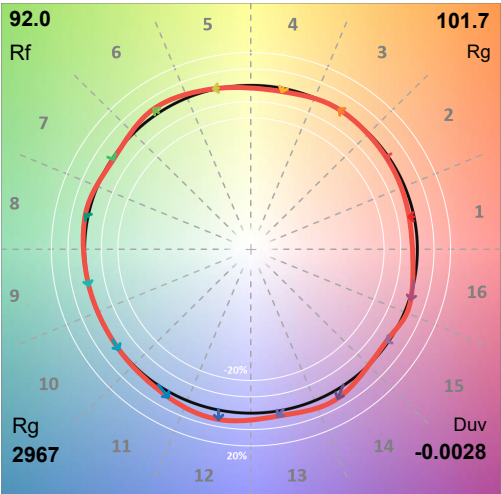

Color Distortion Graphic




CIE x 0.4353
CIE y 0.4353
CIE u' 0.2529
CIE v' 0.5181

CIE 13.3-1995

Ra 96.1


R9 74.2

Color Rendition by Color Evaluation Sample (CES)

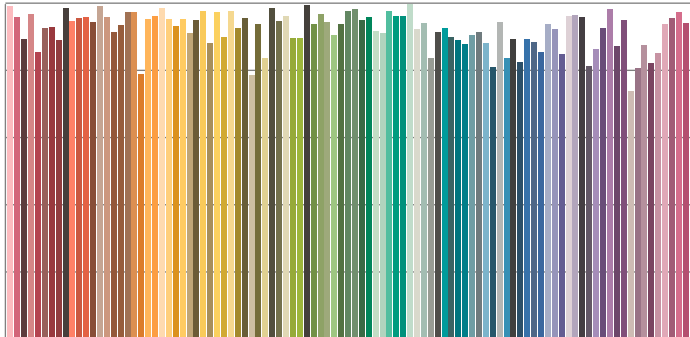


Color evaluation sample CES01 through CES99

Local Color Fidelity (per hue bin)

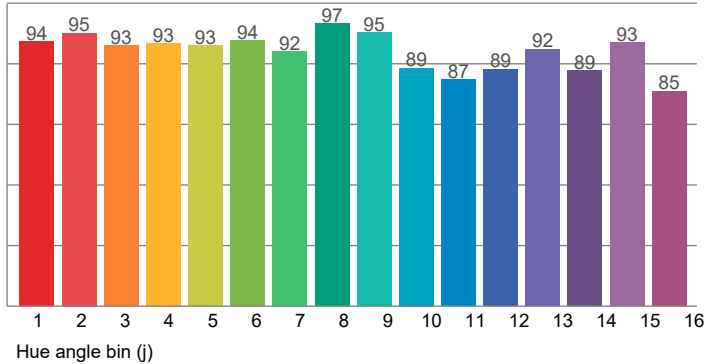

Local Chroma Shift (per hue bin)

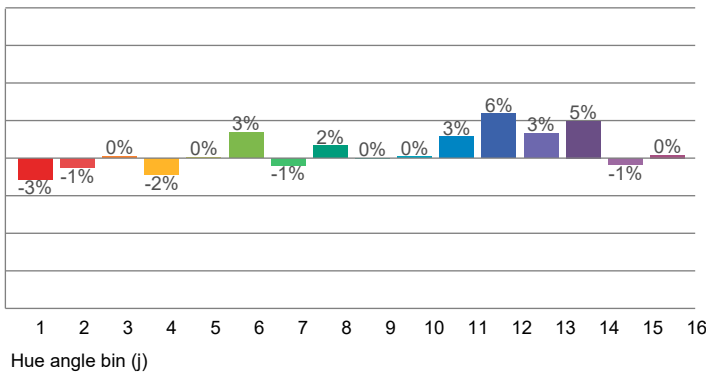


Test report

Print date 4/2/2026
Light measurement results



Color Rendering Index (CQS)

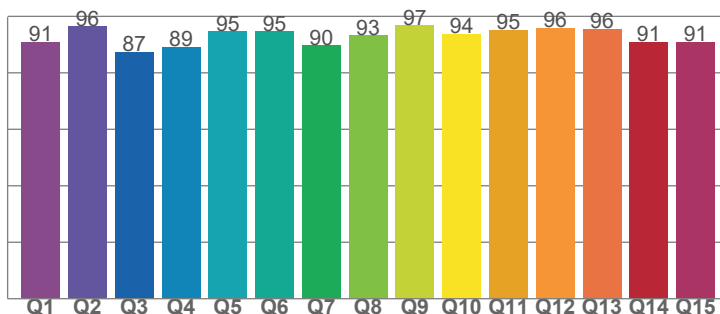

Q1	91.0	Q9	96.8
Q2	96.5	Q10	93.8
Q3	87.4	Q11	95.3
Q4	89.2	Q12	95.9
Q5	94.6	Q13	95.6
Q6	94.7	Q14	91.0
Q7	89.7	Q15	91.0
Q8	93.2	CQS	92.3

Hue Bin	Rf	Shifts (%)	
		Chroma	Hue
1	94	-3%	1%
2	95	-1%	2%
3	93	0%	3%
4	93	-2%	0%
5	93	0%	3%
6	94	3%	1%
7	92	-1%	1%
8	97	2%	-1%
9	95	0%	3%
10	89	0%	7%
11	87	3%	9%
12	89	6%	1%
13	92	3%	-4%
14	89	5%	-7%
15	93	-1%	-2%
16	85	0%	-12%

Rg 101.7


Gamut Index Rf

Gamut index (Rg)

Rf 92.0

Fidelity Index Rf

Gamut Index vs. Fidelity Index

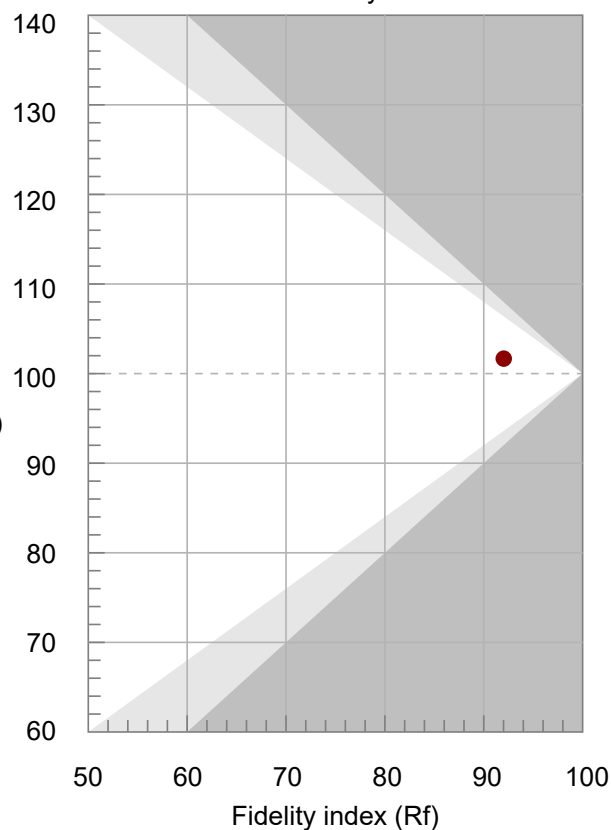


Test report

Print date 4/2/2026
Light measurement results



Luminous Intensity diagram

Unit: 0-100% of peak intensity

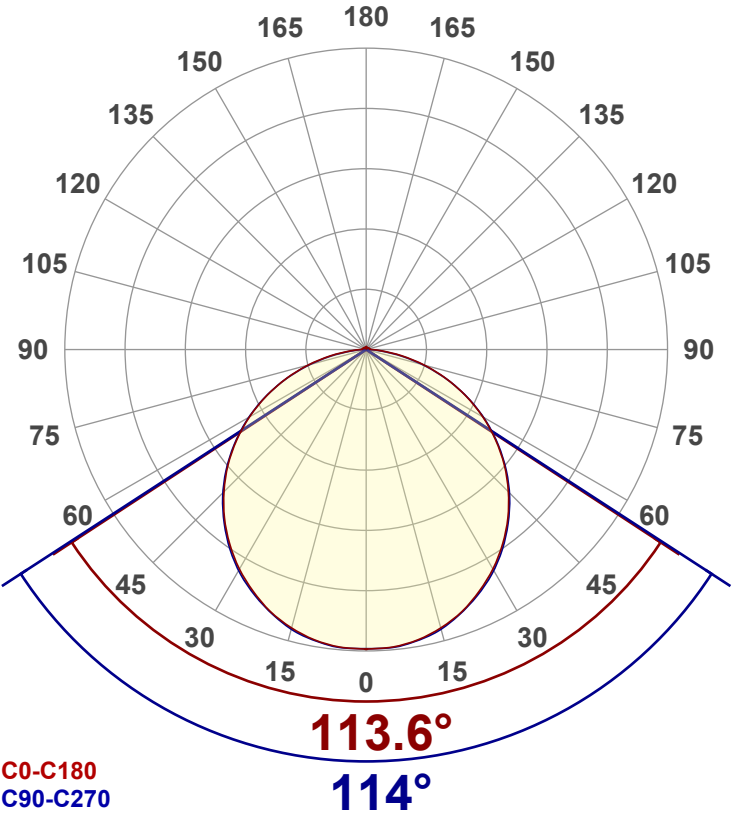

Main Values


Output (total Lumen)	195.4 lm
Lumen Up% / Down%	1.573% / 98.43%
Peak Intensity	66.34 cd
Beam Angle (50%-FWHM)	113.8°
Field Angle (10%-FWHM)	162.5°
Cutoff Angle (2.5%-FWHM)	{c_ANG/0.00}°

Intensity Ratios

In 120° cone	488.6
In 90° cone	148.9

Linear distribution diagram

Intensity [cd]

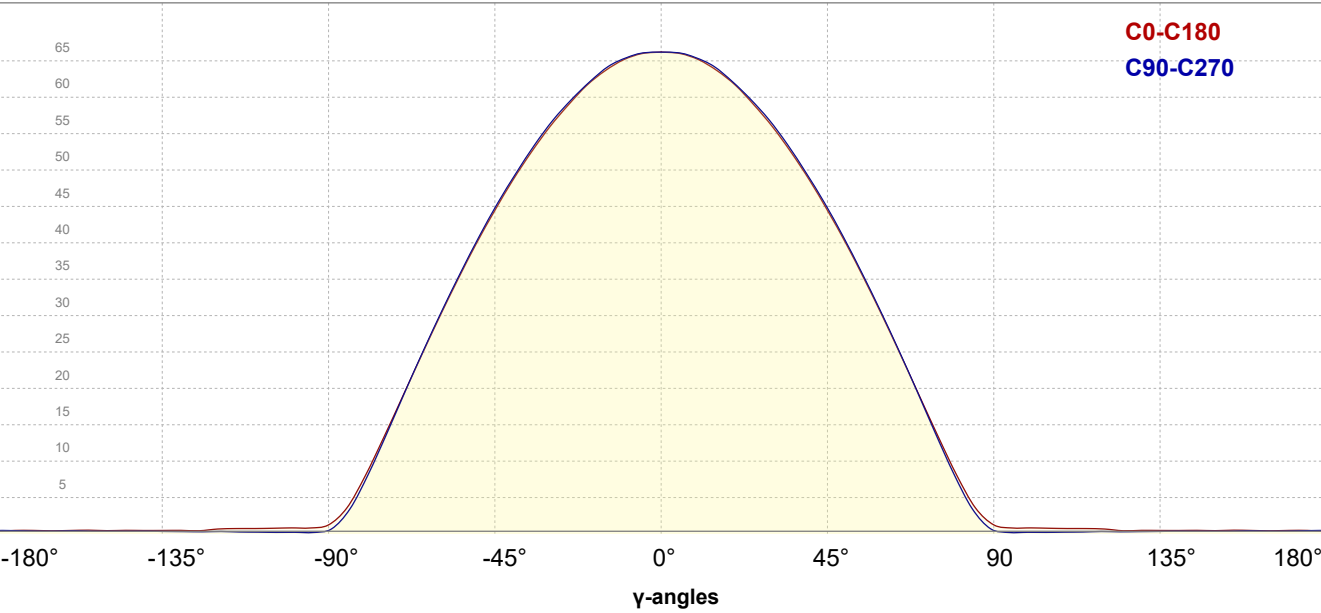


Test report


Print date 4/2/2026
Light measurement results



Iso-intensity Diagram (Iso-candela)

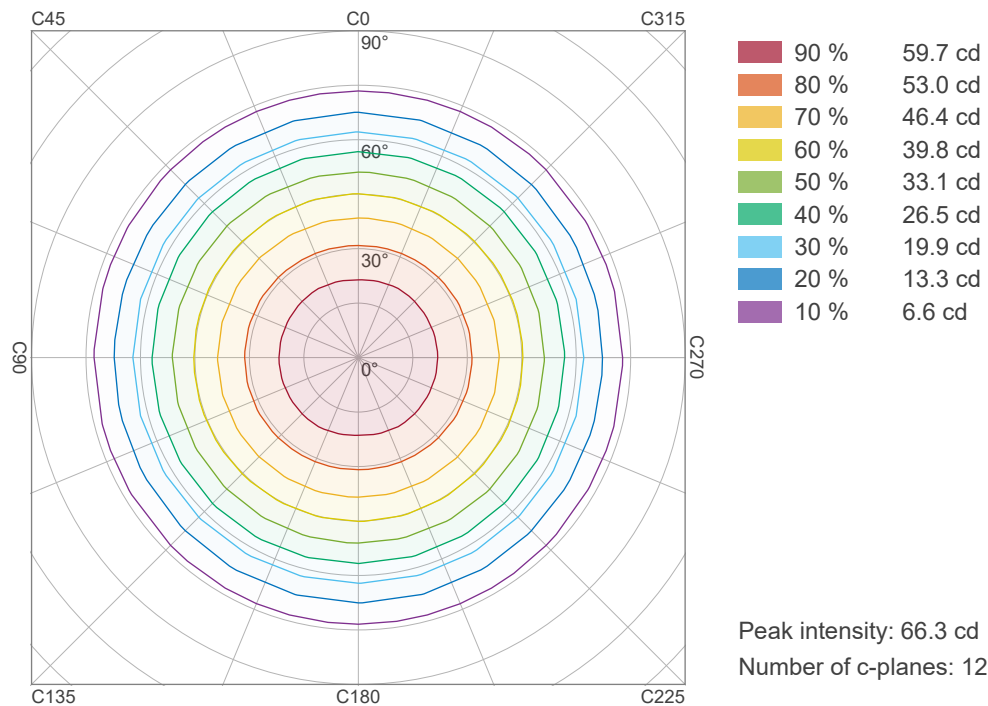

Iso-illuminance Diagram (Iso-lux)

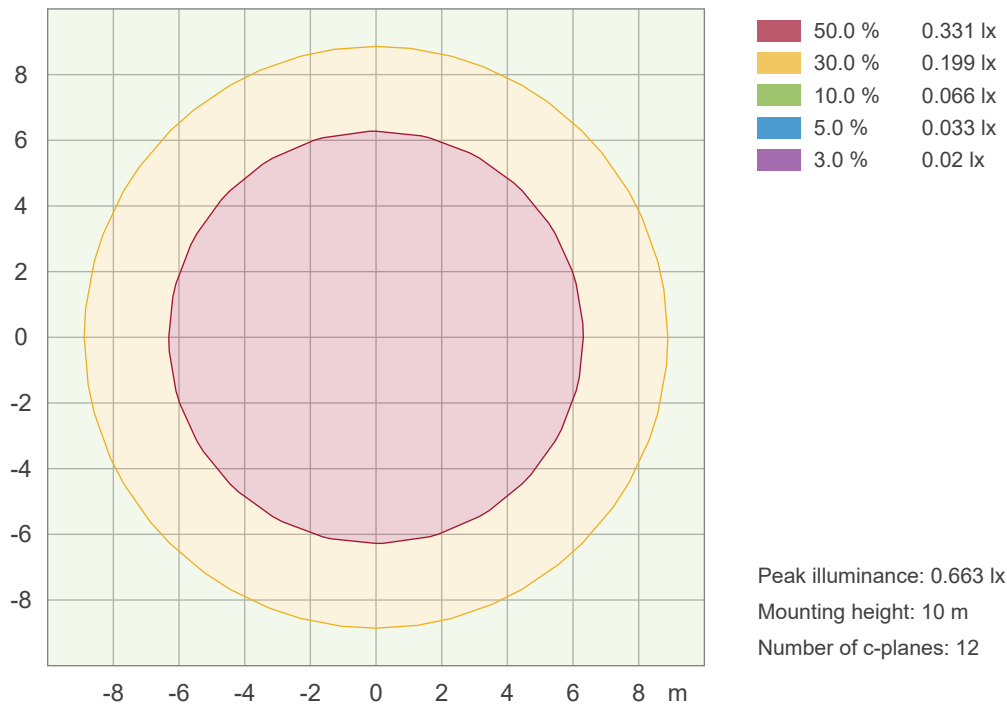


Test report

Print date 4/2/2026
Light measurement results




Beam details

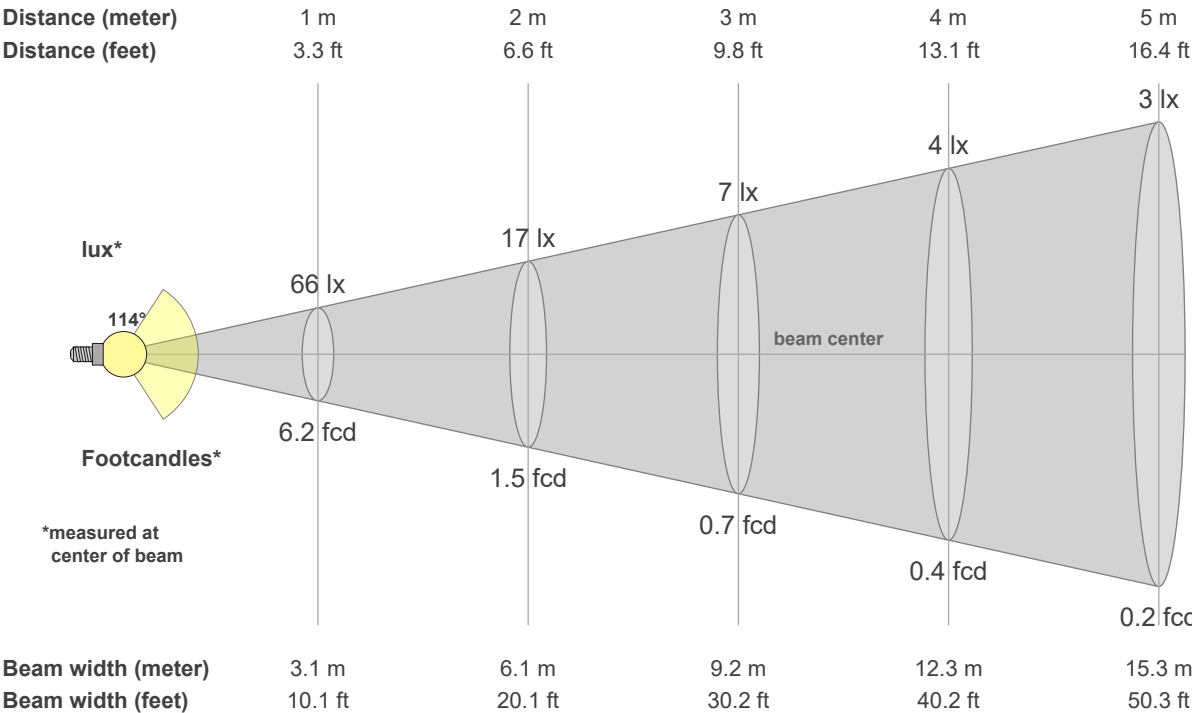

Luminaire budgetary diagram

LAMPS (number of lamps)

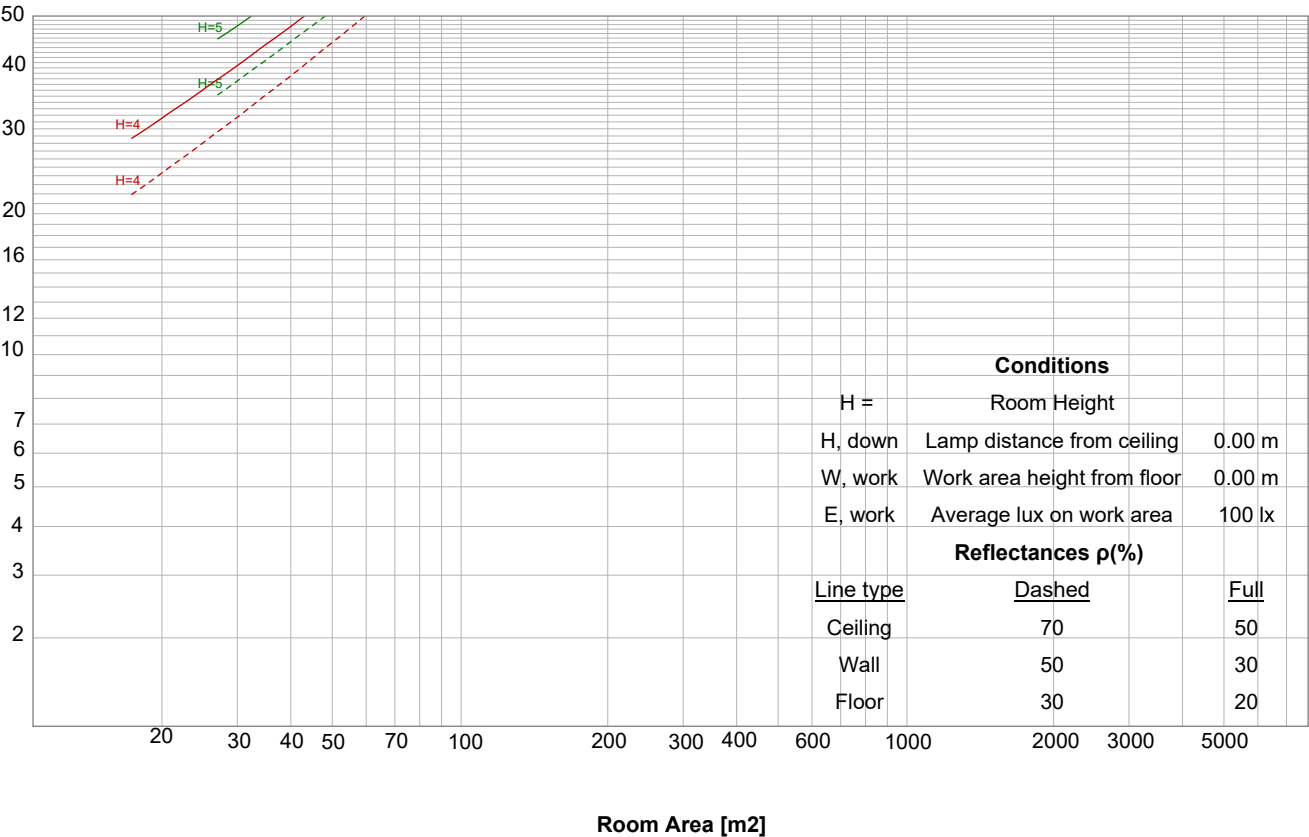

Test report

Print date 4/2/2026
Light measurement results



Intensity details

Beam intensities from 1 – 20 m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6	ft
66	17	7	4	3	2	1	1	1	1	1	0	0	0	0	0	0	0	0	0	lux
6.2	1.5	0.7	0.4	0.2	0.2	0.1	0.1	0.1	0.1	0.1	0	0	0	0	0	0	0	0	0	fc

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
66.3	66.0	65.2	63.7	61.7	59.0	56.0	52.5	48.7	44.4	39.9	35.0	29.8	24.4	18.8	13.3	8.0	3.6	1.2	0.8	cd
100%	100%	98%	96%	93%	89%	85%	79%	73%	67%	60%	53%	45%	37%	28%	20%	12%	5%	2%	1%	of 0°val

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
66.3	66.0	65.3	63.9	61.8	59.3	56.3	52.9	49.0	44.7	40.1	35.1	29.9	24.4	18.7	12.9	7.5	3.0	0.6	0.2	cd
100%	100%	98%	96%	93%	89%	85%	80%	74%	68%	61%	53%	45%	37%	28%	20%	11%	5%	1%	0%	of 0°val

Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
66.3	66.0	65.2	63.7	61.7	59.0	56.0	52.5	48.7	44.4	39.9	35.0	29.8	24.4	18.8	13.3	8.0	3.6	1.2	0.8	cd
100%	100%	98%	96%	93%	89%	85%	79%	73%	67%	60%	53%	45%	37%	28%	20%	12%	5%	2%	1%	of 0°val

Intensities in 270° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°	γ
66.3	66.0	65.3	63.9	61.8	59.3	56.3	52.9	49.0	44.7	40.1	35.1	29.9	24.4	18.7	12.9	7.5	3.0	0.6	0.2	cd
100%	100%	98%	96%	93%	89%	85%	80%	74%	68%	61%	53%	45%	37%	28%	20%	11%	5%	1%	0%	of 0°val

Test report

Print date 4/2/2026
Light measurement results



IESNA TM-15-07 LUMINAIARE CLASSIFICATION SYSTEM FOR OUTDOOR LUMINAIRES

Forward Light

Low (0-30°)	25.8	lm	13.2%
Medium (30-60°)	49.3	lm	25.2%
High (60-80°)	19.0	lm	9.73%
Very High (80-90°)	2.05	lm	1.05%

Back Light

Low (0-30°)	25.8	lm	13.2%
Medium (30-60°)	49.3	lm	25.2%
High (60-80°)	19.0	lm	9.73%
Very High (80-90°)	2.05	lm	1.05%


Uplight

Low (90-100°)	0.697	lm	0.357%
High (100-180°)	2.38	lm	1.22%

Total

Sum	195.4	lm	100%
------------	--------------	-----------	-------------

BUG RATING B0 U1 G0

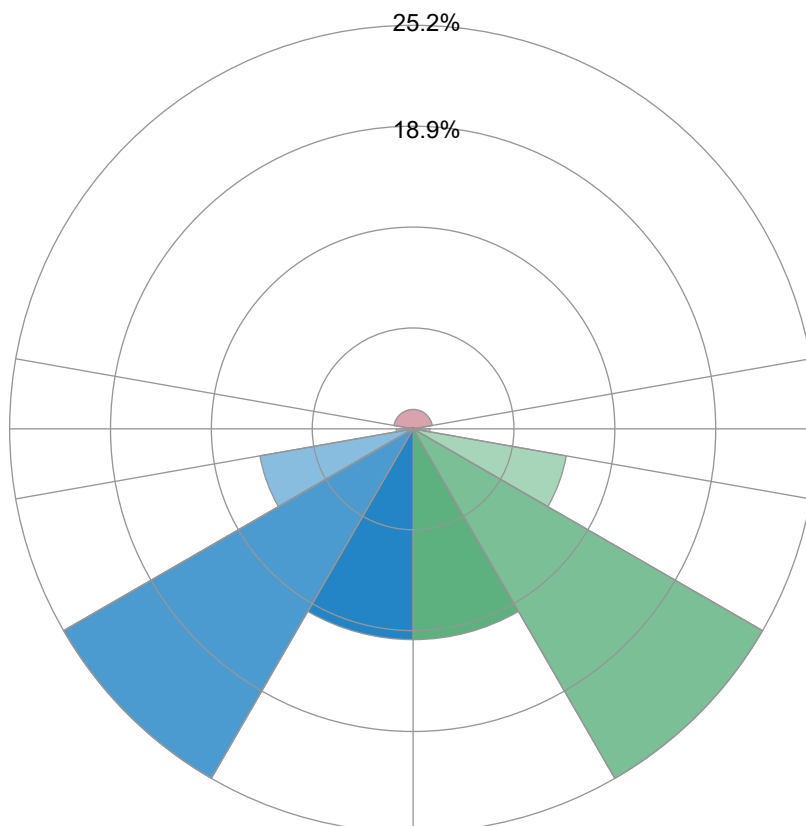

Test report

Print date 4/2/2026
Light measurement results



UGR Table

Corrected, comprehensive UGR table according to 117-1995, S/H ratio=0.25

Reflectances		ρ Ceiling	70	70	50	50	30	70	70	50	50	30
		ρ Walls	50	30	50	30	30	50	30	50	30	30
		ρ Floor	20	20	20	20	20	20	20	20	20	20
Room size		Viewed Crosswise						Viewed Endwise				
H = mounting height above eye level		(Viewing direction orthogonal to lamp length axis)						(Viewing direction parallel to lamp length axis)				
X	Y											
2H	2H	19.0	20.2	19.3	20.6	20.8	21.1	22.3	21.4	22.7	22.9	
	3H	20.0	21.2	20.4	21.6	21.8	22.6	23.8	23.0	24.1	24.4	
	4H	20.3	21.5	20.8	21.8	22.1	23.2	24.4	23.6	24.7	25.0	
	6H	20.6	21.7	20.9	22.0	22.4	23.6	24.7	24.0	25.0	25.4	
	8H	20.6	21.7	21.0	22.0	22.4	23.7	24.8	24.1	25.1	25.5	
	12H	20.6	21.6	21.0	22.0	22.4	23.8	24.8	24.2	25.1	25.6	
4H	2H	19.6	20.8	20.0	21.1	21.4	21.3	22.5	21.7	22.8	23.1	
	3H	20.9	21.9	21.3	22.2	22.7	23.0	24.0	23.4	24.4	24.8	
	4H	21.2	22.2	21.7	22.6	23.2	23.6	24.5	24.1	25.0	25.5	
	6H	21.5	22.4	22.0	22.7	23.1	24.1	25.0	24.6	25.3	25.7	
	8H	21.5	22.3	22.1	22.7	23.1	24.2	25.0	24.8	25.4	25.8	
	12H	21.6	22.2	22.1	22.7	23.2	24.3	25.0	24.8	25.4	25.9	
8H	4H	21.5	22.2	22.0	22.6	23.1	23.7	24.5	24.2	24.9	25.3	
	6H	21.8	22.4	22.3	22.9	23.5	24.2	24.8	24.7	25.3	25.9	
	8H	21.9	22.5	22.5	23.0	23.7	24.4	24.9	24.9	25.5	26.1	
	12H	22.0	22.4	22.6	22.9	23.6	24.5	25.0	25.1	25.5	26.1	
12H	4H	21.4	22.1	22.0	22.6	23.1	23.6	24.3	24.1	24.7	25.2	
	6H	21.9	22.4	22.4	22.9	23.6	24.2	24.8	24.8	25.3	26.0	
	8H	22.0	22.4	22.6	22.9	23.6	24.4	24.9	25.0	25.4	26.0	
Variations with the observer position for the luminaire spacings, S:												
S = 1.0H		0.1 / -0.2						0.2 / -0.2				
S = 1.5H		0.3 / -0.6						0.6 / -0.7				
S = 2.0H		0.7 / -1.1						1.3 / -1.3				

Coefficients of utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20
RCR		(Room Cavity Ratio)				Room values are expressed as percentage of Lumen delivered to the task surface												
0	118.7	118.7	118.7	118.7	115.7	115.7	115.7	115.7	110.2	110.2	110.2	105.2	105.2	105.2	100.6	100.6	100.6	98.4
1	108.2	103.3	98.9	95.0	105.3	100.9	96.9	93.3	96.3	93.1	90.1	92.1	89.5	87.0	88.3	86.2	84.2	82.0
2	98.2	89.8	82.9	77.1	95.4	87.8	81.4	76.0	84.0	78.6	74.0	80.5	76.0	72.1	77.2	73.5	70.3	68.0
3	89.4	78.7	70.5	63.9	86.8	77.0	69.4	63.2	73.8	67.3	61.9	70.8	65.3	60.6	68.1	63.4	59.3	57.1
4	81.8	69.7	60.8	54.0	79.3	68.2	59.9	53.5	65.5	58.3	52.6	63.0	56.7	51.7	60.6	55.3	50.8	48.6
5	75.2	62.2	53.1	46.4	72.9	60.9	52.4	46.0	58.6	51.1	45.4	56.5	49.9	44.7	54.5	48.7	44.1	41.9
6	69.4	55.9	46.9	40.4	67.3	54.9	46.3	40.1	52.9	45.3	39.7	51.0	44.3	39.2	49.3	43.4	38.7	36.6
7	64.3	50.6	41.8	35.6	62.4	49.7	41.4	35.4	48.1	40.5	35.0	46.5	39.7	34.7	45.0	38.9	34.3	32.3
8	59.8	46.2	37.6	31.7	58.1	45.4	37.2	31.6	43.9	36.6	31.3	42.6	35.9	31.0	41.3	35.2	30.7	28.8
9	55.9	42.4	34.1	28.5	54.3	41.7	33.8	28.4	40.4	33.2	28.1	39.2	32.6	27.9	38.1	32.1	27.7	25.8
10	52.3	39.1	31.1	25.8	51.0	38.5	30.9	25.7	37.4	30.4	25.5	36.3	29.9	25.3	35.3	29.4	25.1	23.4

Test report

Print date 4/2/2026
Light measurement results



Power details

Input power

Frequency of input power	0.0 Hz
Power feed to light source	3.72 W
RMS Input voltage feed V,RMS	23.92 V
RMS Input current feed I,RMS	0.16 A
Volt-Amp or apparent power = V,RMS*I,RMS	3.7 VA
Displacement factor of AC power feed	0.00
Power factor of AC current feed	1.00
Total harmonic distortion of the current	0%
Total harmonic distortion of the voltage	0%

Input power curve

Efficiency

Radiated power efficiency

18.4

Lumen efficiency

52.55 lm/W

Stabilization details

Warmup Conditions

Stable period	15 min
Stable change max	2%
Minimum time	15 min

Color Temperature Change

CCT start	2968 K
CCT shift	-1 K
CCT end	2967 K


Warmup Result

Total warmup time	Not completed
Warmup variation	-0.0921%

Output Change

Output start	195.5 lm
Output change	-37.493 lm
Output end	195.4 lm

Stabilization Curve

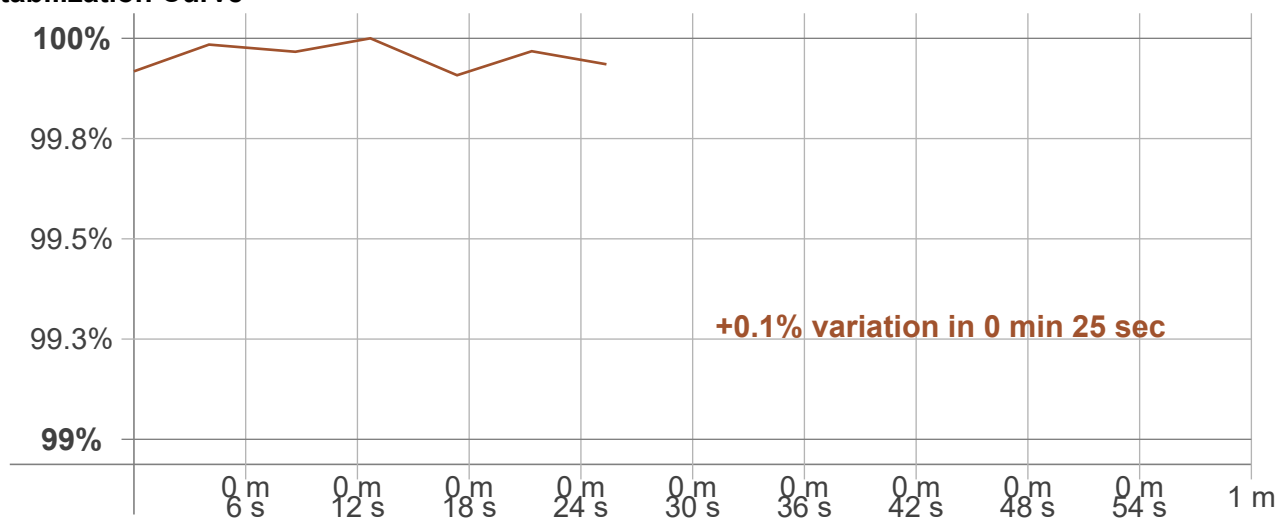

Test report

Print date 4/2/2026
Light measurement results



Flicker TLA details

Flicker Meter Type Viso Systems LabFlicker
Frequency of input power 0.0 Hz
Flicker/TLA sample rate NaN samples/s

Measurement time
PstLM 180 sec.
All other indices 1,5 sec,

Flicker indices according to Illuminating Engineering Society (IES)

Flicker frequency NaN Hz
Percent Flicker NaN %
Flicker index NaN

Flicker indices according to California Energy Commission (CEC) 2016b

JA8/10 40 Hz NaN %
JA8/10 90 Hz NaN %
JA8/10 200 Hz NaN %
JA8/10 400 Hz NaN %
JA8/10 1000 Hz NaN %


TLA indices (re IEC TR 61547-1, IEC 61000-3-3 and IEC 61000-4-15)

PstLM value ($F < 80$ Hz) NaN
SVM value ($80 < F < 2000$ Hz) NaN


Flicker indices according to Lighting Research Center (2015)

Perception metric, Assist Mp NaN

Flicker frame (frame of one flicker period in time domain)

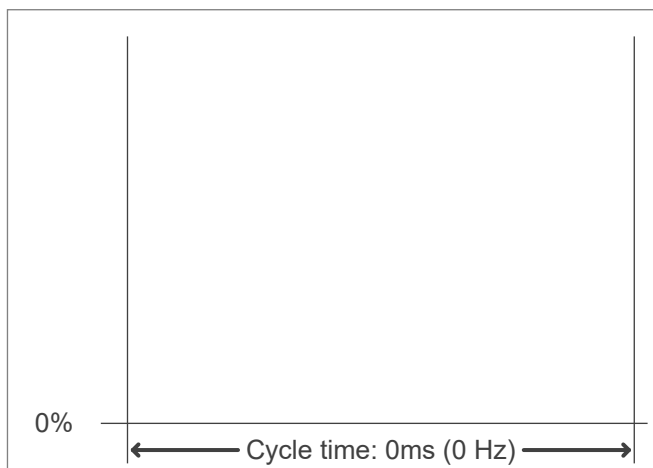

Flicker FFT (flicker curve in frequency domain)

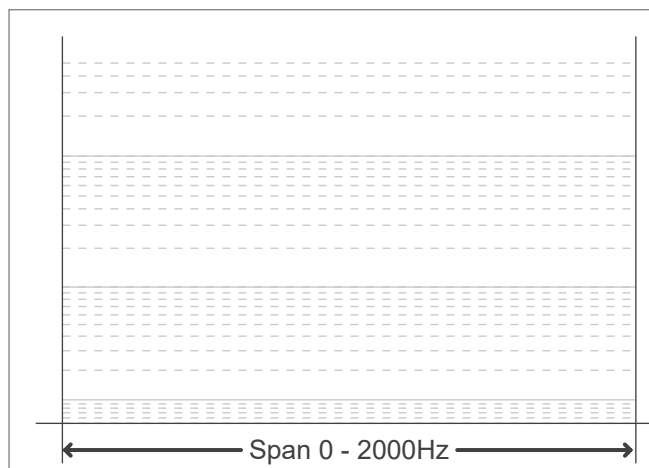

IEEE 1789 Frequency/modulation plot

