




1. Measure and mark the desired location of the mounting clips. Drill pilot holes for mounting clips. Affix mounting clips to the surface with screws.

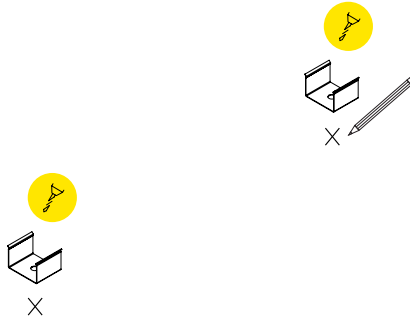


2. Clean the inside surface of the channel of dust and debris with rubbing alcohol. Dry, then apply RibbonLyte. Make all necessary electrical connections. (Note: For end feed, be sure to thread wire through end cap but do not attach end cap to channel yet.)

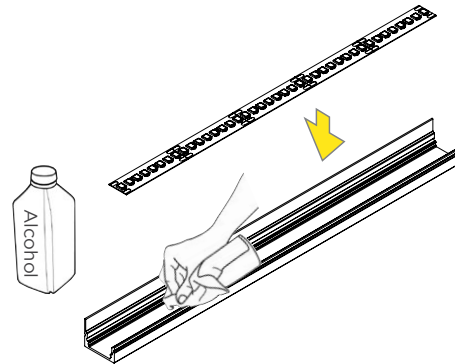

3. Snap lens into place.

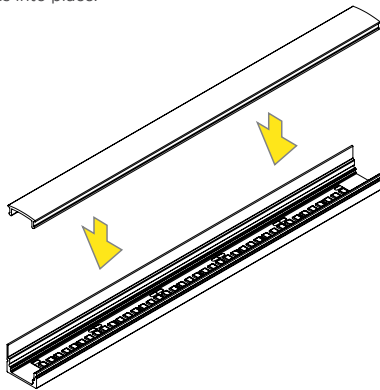


4. Attach end caps.

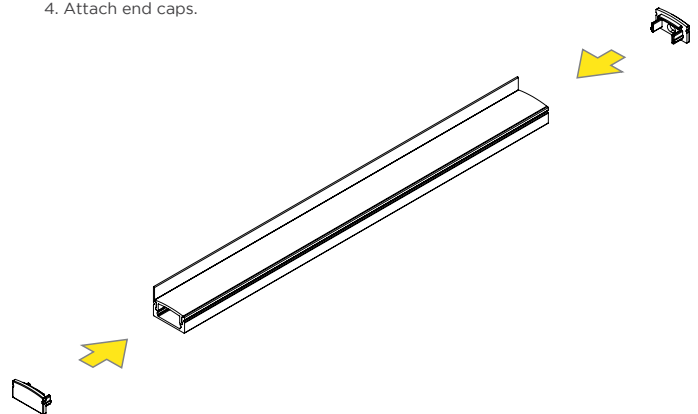

NOTE: If you are installing multiple extrusions to create a longer seamless fixture, carefully measure and cut a single lens to fit. Roll lens (up to 20 m) available upon request.

NOTE: Do not butt end caps against each other when creating longer fixtures. For direct view fixtures of more than 6 ft 6.7 in. (2 m), only attach end caps to final outside ends of connected pieces. Butting interior end caps against each other will cause light gaps or dead spots.

5. Align the channel above the mounting clips and push down to snap into place.

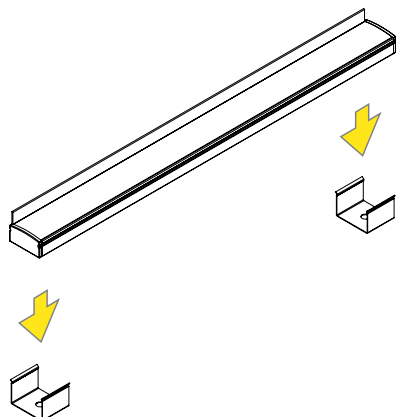

6. AS1GS fixture installation complete.

