




1. Measure and mark the desired location of the mounting clips. Drill pilot holes for mounting clips. Affix the mounting clips to the surface with screws.




2. Clean the inside surface of the channel of dust and debris with rubbing alcohol. Dry.

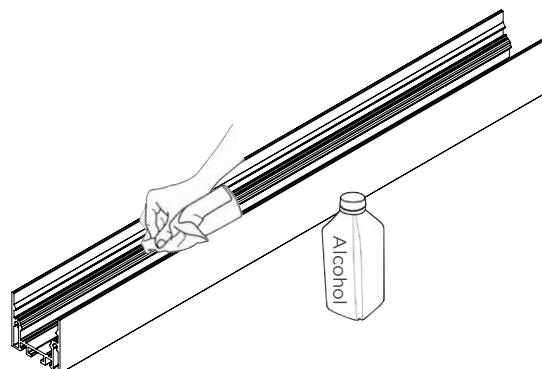


3. Apply RibbonLyte to channel. Make all necessary electrical connections. (Note: For end feed, be sure to thread wire through end cap but do not attach end cap to channel yet.)

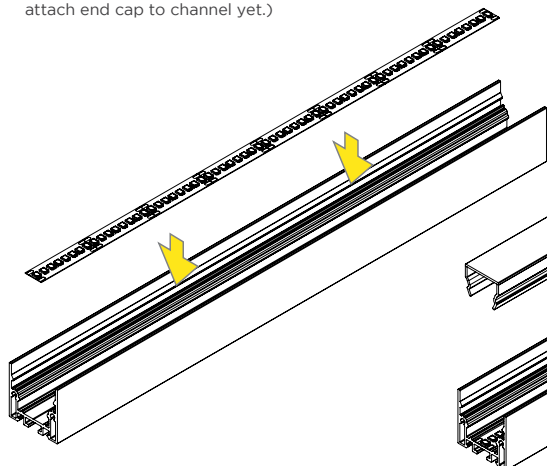


4. Snap lens in place.

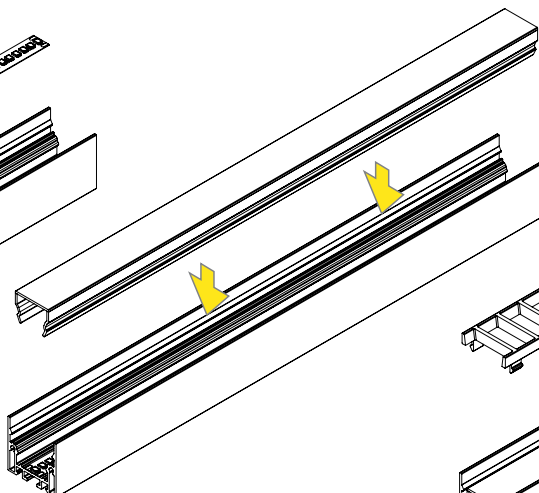


5. Snap louver in place.

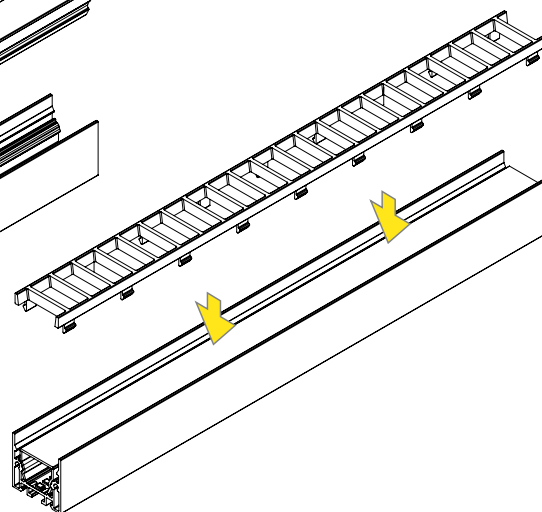

6. Attach end caps with set screws.

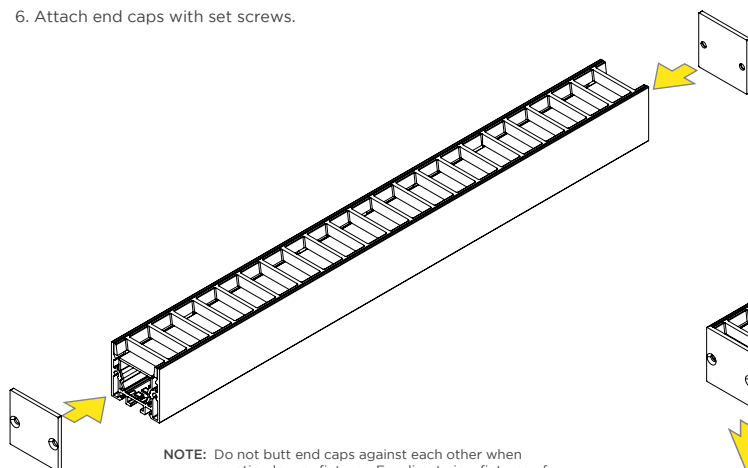

7. Align the channel above the mounting clips and push down to snap into place. AS29L fixture installation complete.

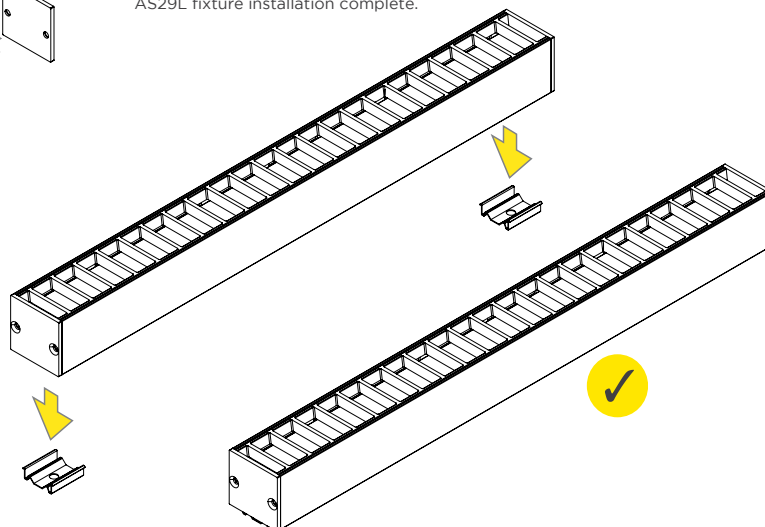

NOTE: Do not butt end caps against each other when creating longer fixtures. For direct view fixtures of more than 6 ft 6.7 in. (2 m), only attach end caps to final outside ends of connected pieces. Butting interior end caps against each other will cause light gaps or dead spots.