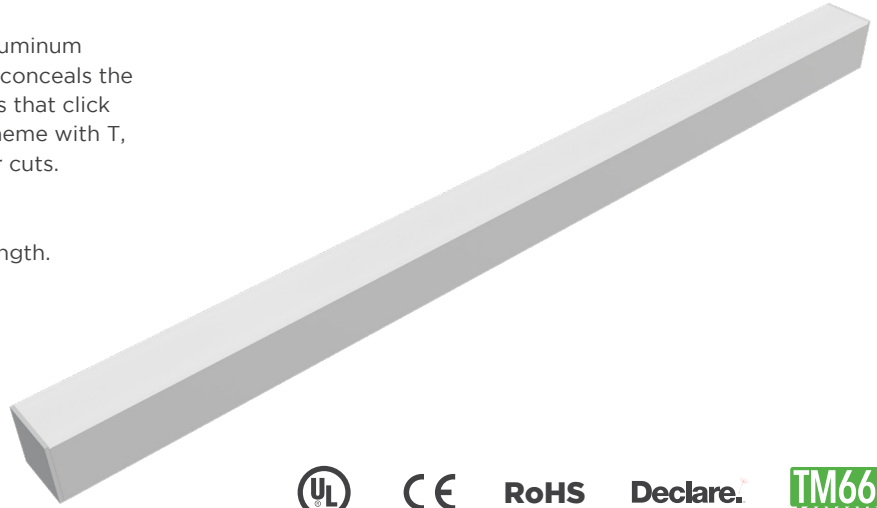


AS21 CHANNEL FIXTURE

AS21 channel is a narrow, square surface mounted aluminum alloy extrusion. The sleek design includes a lens that conceals the profile edges in front view and hidden mounting clips that click into the rear of the channel. Elevate your lighting scheme with T, X and 90° corner connectors that don't require miter cuts.

- Narrow square profile
- Sold by the foot. Factory or field cuttable to any length.
- 112x113° beam angle
- Milky, Black or Clear lens
- T, X, 180° and three 90° corner connectors



HOUSING FINISHES



Silver Black White
Standard



RoHS

Declare.



AVAILABLE LENS FINISHES



Clear Lens (PC)
85% Light Transmission



Milky Lens (PC)
65% Light Transmission



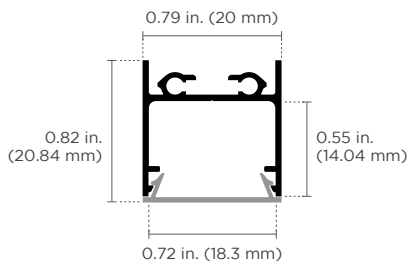
Black Lens (PC)
55% Light Transmission

AVAILABLE COLORS & COLOR TEMPERATURES



DIMENSIONS

AS21 Channel




Width: 0.79 in. (20 mm)
Height: 0.82 in. (20.84 mm)
Internal Width: 0.72 in. (18.3 mm)

Mounting Clip (Part #: CHAS21MC)


Material: stainless steel

Side View




Width: 0.66 in. (16.8 mm)
Height: 0.19 in. (4.95 mm)
Length: 0.55 in. (14 mm)

Top View



Assembled View



SPECIFICATIONS

Beam Angle	112x113°
Lens Type	Clear Lens (PC), Milky Lens (PC), Black Lens (PC)
Length	Channel is sold by the foot and cut to your exact desired length
Operating Voltage	24 V
Dimming	MLV / ELV / 0-10 Volt / DALI / CASAMBI
Operating Temperature	-40 — 158 °F (-40 — 70 °C)
Colors	1800K, 2000K, 2200K, 2400K, 2700K, 3000K, 3500K, 4000K, 6000K, Red, Amber, Green, Blue, Pixel RGB, RGBW, RGBWW, RGBA, Variable White, Warm Dim (1800K, 2000K, 2200K, Pixel RGB only available in IP20)
CRI	90+ CRI (for Static White LEDs only)
Lifetime (L70 reported)	50,000 hours
MacAdam ellipse (SDCM)	1-Step Binning (for Static White LEDs only)
Certifications	UL Listed UL 2108 Issued: 2004/02/27 Ed: 1 Rev: 2014/02/24 Low Voltage Lighting Systems CSA C22.2#9.0 Issued: 1996/06/01 Ed: 1 (R2011) General Requirements for Luminaires; with Gen. Inst. 1: 1997, Gen Inst. 2: 1998. ROHS compliant

STATIC WHITE SERIES 2 RIBBONLYTE SPECIFICATIONS, COMPATIBILITY & DELIVERED LUMEN OUTPUT

RibbonLyte Type	Wattage	CCT	Incremental Length	LED Pitch	Max. Length (IP20)	A Delivered Lumen at 3000K with Milky Lens		Compatibility with AS21 Channel				Diode Visibility Visible = Y Not Visible = N
Static White Series 2	3.0 W/ft	3000K	1.97 in. (50 mm)	48 LEDs/ft (160 LEDs/m)	36 ft (11 m)	lm/ft	lm/m	IP20	IP65	IP68	IP69	N
						141	462	✓	✓	✓	✓	

Lumen Multiplier by CCT (Static White Series 2 RibbonLyte)

CCT (3.0 W/ft)	1800K	2000K	2200K	2400K	2700K	3000K	3500K	4000K	6000K
B Multiplier	0.67	0.79	0.85	0.91	0.97	1.00	1.03	1.00	1.08


























Lumen Multiplier by Wattage (Static White Series 2 RibbonLyte)

Wattage	0.75 w/ft	1.5 w/ft	2.2 w/ft	3.0 w/ft	4.4 w/ft	5.0 w/ft	6.0 w/ft
C Multiplier	0.26	0.51	0.73	1.00	1.45	1.60	1.96

$$\mathbf{A} \times \mathbf{B} \times \mathbf{C} = \text{Lumen Output}$$

Acolyte does not warrant or represent that the information is free from errors or omission. The information may change without notice and Acolyte is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

ACCESSORIES

End Cap Material: PETG	T Connector Material: PETG	X Connector Material: PETG	Magnetic Mount Material: PETG
End View  0.82 in. (20.84 mm) 0.79 in. (20 mm) Side View  0.16 in. (4 mm) Top View   Part #s: CHAS21TCNTSV (Silver) CHAS21TCNTBK (Black) CHAS21TCNTWH (White)	End View  0.79 in. (20 mm) 0.79 in. (20 mm) Top View  2.44 in. (61.88 mm) 1.26 in. (31.88 mm) 1.61 in. (40.94 mm) 0.79 in. (20 mm)  Part #s: CHAS21XCNTSV (Silver) CHAS21XCNTBK (Black) CHAS21XCNTWH (White)	End View  0.79 in. (20 mm) 0.79 in. (20 mm) Top View  0.79 in. (20 mm) 0.23 in. (5.94 mm)  Part #s: CHAS21XCNTSV (Silver) CHAS21XCNTBK (Black) CHAS21XCNTWH (White)	End View  0.32 in. (8.05 mm) 0.71 in. (18 mm) Top View  1.38 in. (35 mm)   Part #s: CHAS21MMSV (Silver) CHAS21MMBK (Black) CHAS21MMWH (White)
90° Corner Connector Material: PETG	90° Vertical Inner Corner Connector Material: PETG	90° Vertical Outer Corner Connector Material: PETG	180° Connector Material: PETG
End View  0.79 in. (20 mm) Top View  1.61 in. (40.94 mm) 1.02 in. (25.94 mm)  Part #s: CHAS2190CCNTSV (Silver) CHAS2190CCNTBK (Black) CHAS2190CCNTWH (White)	End View  1.54 in. (39.04 mm) 0.79 in. (20 mm) Side View  1.54 in. (39.04 mm) 0.79 in. (20.04 mm)  Part #s: CHAS2190ICNTSV (Silver) CHAS2190ICNTBK (Black) CHAS2190ICNTWH (White)	End View  1.58 in. (40.04 mm) 0.79 in. (20 mm) Side View  0.99 in. (25.04 mm) 1.58 in. (40.04 mm) 0.79 in. (20 mm) 1.58 in. (40.04 mm)  Part #s: CHAS2190OCCNTSV (Silver) CHAS2190OCCNTBK (Black) CHAS2190OCCNTWH (White)	End View  0.19 in. (4.95 mm) 0.71 in. (18 mm) Top View  1.97 in. (50 mm) 0.71 in. (18 mm)   Part #s: CHAS21180CNTSV (Silver)

ORDERING GUIDE

STEP 1 Complete Channel Part Number

CHANNEL	LENS	HOUSING COLOR
CHAS21		
CHAS21 - AS21 Channel	C - Clear Lens BK - Black Lens M - Milky Lens	SV - Silver (default) BK - Black WH - White

STEP 2 Complete RibbonLyte Part Number

CATEGORY	CRI	RIBBON TYPE & IP RATING
RB		
RB - RibbonLyte	0 - Static Color, Color Changing 90 - 90+ CRI Static White	SWS220 - Static White Series 2 IP20 SWS265 - Static White Series 2 IP65 SWS268 - Static White Series 2 IP68 SWS269 - Static White Series 2 IP69 SCS220 - Static Color Series 2 IP20 SCS265 - Static Color Series 2 IP65 SCS268 - Static Color Series 2 IP68 SCS269 - Static Color Series 2 IP69 LINEA20 - Linea RibbonLyte IP20 RGBWW20 - RGBWW 5-in-1 IP20 RGBWS220 - RGBW Series 2 IP20 RGBWS265 - RGBW Series 2 IP65 RGBWS268 - RGBW Series 2 IP68 RGBWS269 - RGBW Series 2 IP69 VWS220 - VW Series 2 IP20 VWS265 - VW Series 2 IP65 VWS268 - VW Series 2 IP68 VWS269 - VW Series 2 IP69 RGBWADD - Addressable RGBW IP67 RGBADD - Pixel RGB IP20 WD20 - Warm Dim IP20 WD65 - Warm Dim IP65 WD68 - Warm Dim IP68 WD69 - Warm Dim IP69 XACTA20 - Xacta RibbonLyte IP20

NOTE: To ensure waterproofing standards are met, IP65/IP68/IP69 RibbonLyte can NOT be cut in the field.

WATTAGE

0.75 - 0.75 W/ft (2.46 W/m - Static White, Static Color)
1.0 - 1.0 W/ft (3.3 W/m - Variable White)
1.5 - 1.5 W/ft (4.9 W/m - Static White, Static Color)
2.2 - 2.2 W/ft (7.2 W/m - Static White, Static Color)
2.4 - 2.4 W/ft (8 W/m - Static White Linea)
3.0 - 3.0 W/ft (9.8 W/m - Static White, Static Color, Variable White)
4.3 - 4.3 W/ft (14 W/m - Static White Linea)
4.4 - 4.4 W/ft (14.4 W/m - Static White, Static Color, RGBW, RGBWW, RGBA)
5.2 - 5.2 W/ft (17.1 W/m - Warm Dim)
5.0 - 5.0 W/ft (16.4 W/m - Static White, Static Color)
5.5 - 5.5 W/ft (18.0 W/m - RGBW, RGBA)
6.0 - 6.0 W/ft (19.7 W/m - Static White, Static Color, Variable White, Addressable RGBW)
6.1 - 6.1 W/ft (20 W/m - Variable White Linea, Pixel RGB)
8.8 - 8.8 W/ft (28.86 W/m - RGBW, RGBWW)

COLOR


18 - 1800K
20 - 2000K
22 - 2200K
24 - 2400K
27 - 2700K
30 - 3000K
35 - 3500K
40 - 4000K
60 - 6000K
R - Red
A - Amber
G - Green
B - Blue

VW - Variable White 2000K-6500K
VW1833 - Variable White 1800K-3300K (IP20)
RGB27 - Red, Green, Blue + 2700K
RGB30 - Red, Green, Blue + 3000K
RGB40 - Red, Green, Blue + 4000K
RGB2465 - Red, Green, Blue + 2400K + 6500K
RGBA - Red, Green, Blue + Amber
RGBW30 - RGB + 3000K Addressable
RGBW40 - RGB + 4000K Addressable
RGBW60 - RGB + 6000K Addressable
RGBS - Pixel RGB (SPI)
2920 - Warm Dim 2900K-2000K (IP20)
1830 - Warm Dim 3000K-1800K (IP20)
2721 - Warm Dim 2700K-2100K (IP65/IP68/IP69)
Z - Undecided (For quotes only. Must be chosen before final order.)

CONNECTION OPTIONS (See diagrams on the right)

Custom Length (ft.)


- | | |
|------------------------------------|-------------------------------------|
| 1 - End Feed Bare Wire Connection | 4 - End Feed with IP67 Male Coupler |
| 2 - Back Feed Bare Wire Connection | 5 - Soldered Daisy Chain |
| 3 - Side Feed Bare Wire Connection | 6 - Daisy Chain With IP67 Couplers |

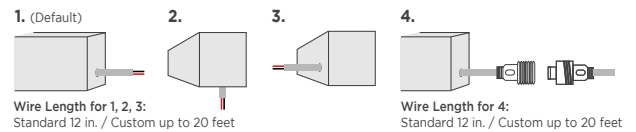

STEP 3 Complete Assembly Option & Length


ASSEMBLY OPTION LENGTH (Standard factory assembled length up to 6 ft 6.7 in. / 2 m)

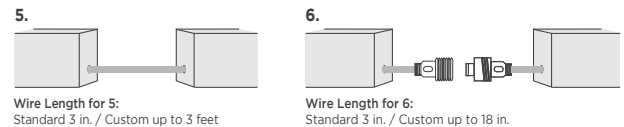- FI - Field Assembly
FA - Factory Assembly** (not recommended for exterior applications)
** Factory assembled runs exceeding 6 ft 6.7 in. (2 m) will be split into multiple daisy chained fixtures.



DO NOT BUTT END CAPS AGAINST EACH OTHER WHEN CREATING LONGER FIXTURES

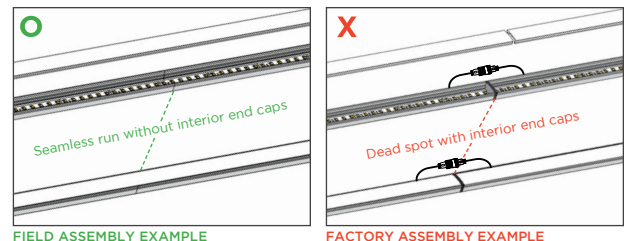Acolyte STRONGLY SUGGESTS field assembly (without using interior end caps) for direct-view fixtures of more than 6 ft 6.7 in. (2 m) in length. Field assembly without interior end caps will eliminate gaps or dead spots that can be caused by butting interior end caps against each other.



STEP 4 Add Accessories

180° Connector:
CHAS21180CNTSV (Silver)

T Connector:
CHAS21TICNTSV (Silver)
CHAS21TICNTBK (Black)
CHAS21TICNTWH (White)

X Connector:
CHAS21XCNTSV (Silver)
CHAS21XCNTBK (Black)
CHAS21XCNTWH (White)

Square 90° Corner Connector:
CHAS2190CCNTSV (Silver)
CHAS2190CCNTBK (Black)
CHAS2190CCNTWH (White)

Square 90° Vertical Inner Corner Connector:
CHAS2190VICNTSV (Silver)
CHAS2190VICNTBK (Black)
CHAS2190VICNTWH (White)

Square 90° Vertical Outer Corner Connector:
CHAS2190OCCNTSV (Silver)
CHAS2190OCCNTBK (Black)
CHAS2190OCCNTWH (White)

Magnetic Mount:
CHAS21MMSV (Silver)
CHAS21MMBK (Black)
CHAS21MMWH (White)

AVAILABLE DRIVERS / CONTROLLERS AND DIMMING OPTIONS / WIRE GAUGE CHART

0-10V/ELV/MLV 3-IN-1	ELV	0-10V VW/WD	COMPACT
			
60W, 96W, 288W 0-10V/ELV/MLV 3-in-1 Dimmable Drivers Part No.: • DRVW2460TRI010 (60 W) • DRVW2496TRI010 (96 W) • DRVW24288TRI010 (288 W) 24 VDC 120-277 VAC IP65, dry/damp/wet locations UL Listed	60W Dimmable Driver Part No.: • DRVW2460ELV 24 VDC 100-130 VAC Fits in single-gang switch boxes IP20, dry locations UL Recognized	0-10V Dimmable 90W VW/WD Driver Part No.: • DRVRFWDVW2490120 24 VDC 100-277 VAC IP23, dry/damp locations UL Listed	60W, 96W Non-Dimming Compact Drivers Part No.: • DRV2460C (60 W) • DRV2496C (96 W) 24 VDC 120-277 VAC IP20, dry locations UL Class P
ATHENA WIRELESS COMPATIBLE	CASAMBI COMPATIBLE DRIVERS	DIMMABLE DALI-2 DRIVERS	DIMMABLE DALI-2 DRIVERS
			
94W Athena Wireless Compatible Drivers Part No.: • DRVW2494ATH1CH (1 channel) • DRVW2494ATH2CH (2 channel) 24 VDC 100-277 VAC Dry locations UL Listed	100W & 200W Casambi Compatible 4 Channel Drivers Part No.: • DRVW24100CAS4CH (100 W) • DRVW24200CAS4CH (200 W) 24 VDC 100-277 VAC IP66, dry/damp/wet locations UL Listed, CE, RoHS, Bluetooth, CASAMBI	96W DIMMABLE DALI-2 DT6 D4I & DALI-2 DT8 D4I DRIVERS Part No.: • DRVW2496DALI1CH (1 channel) • DRVW2496DALI2CH (2 channel) 24-26 VDC 120-277 VAC IP67, dry/damp/wet locations UL Listed	75W, 150W, 240W DALI-2 Dimmable Drivers Part No.: • DRVW2475DALI1CH (75 W, 1 channel) • DRVW24150DALI1CH (150 W, 1 channel) • DRVW24240DALI1CH (240 W, 1 channel) • DRV24150DALI2CH (150 W, 2 channels) • DRV24150DALI4CH (150 W, 4 channels) 24 VDC 120-277 VAC IP67, damp/wet locations (1-channel drivers only) IP20, dry location (2-channel & 4-channel drivers only) CE, RoHS, SELV

DMX CONTROLLERS, VARIABLE WHITE DIMMER, WARM DIM DIMMER - FOR COLOR CHANGING FIXTURES


				
GLASS TOUCH WALL CONTROLLERS Part No.: • AWCRCBWWBK • AWCVWBK	1 ZONE WALL CONTROLLER Part No.: DMXCTRLG	5 ZONE WALL CONTROLLER Part No.: DMXCTRL	10 ZONE WALL CONTROLLER Part No.: DMXCTRLD	6 UNIVERSE DMX CONTROLLER Part No.: DMXCTRLDR6U
				
VARIABLE WHITE DIMMER Part No.: • RFDIMVWWH (White) • RFDIMVWBK (Black)	WARM DIM DIMMER Part No.: • RFDIMVDWH (White) • RFDIMVDBK (Black)	4 CHANNEL WATERPROOF DMX INTERFACE Part No.: DMXINFWLC4D	5 CHANNEL DMX DECODER Part No.: DMXINF5	DMX OPTO SPLITTER Part No.: DMXOS8

DRIVER AND RIBBONLYTE AT FULL LOAD


Wattages	30		60		96		150		200		240		300		320	
Wire Gauge	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters	Feet	Meters
24 AWG / 0.25 mm ²	14	4.27	9	2.74	5.5	1.68	3.75	1.14	2.75	0.84	2.25	0.69	1.75	0.53	1.75	0.53
22 AWG / 0.34 mm ²	22	6.71	14	4.27	9	2.74	5.75	1.75	4.5	1.37	3.5	1.07	2.75	0.84	2.75	0.84
20 AWG / 0.5 mm ²	35	10.67	23	7.01	14	4.27	9	2.74	7	2.13	5.75	1.75	4.5	1.37	4.25	1.30
18 AWG / 0.75 mm ²	56	17.07	37	11.28	23	7.01	15	4.57	11	3.35	9	2.74	7.5	2.29	7	2.13
16 AWG / 1.5 mm ²	90	27.44	60	18.29	37	11.28	24	7.32	18	5.49	15	4.57	12	3.66	11	3.35
14 AWG / 2.5 mm ²	142	43.29	95	28.96	59	17.99	38	11.59	28	8.54	23	7.01	19	5.79	17	5.18
12 AWG / 4 mm ²	226	68.90	151	46.04	94	28.66	60	18.29	45	13.72	37	11.28	30	9.15	28	8.54
10 AWG / 6 mm ²	360	109.76	240	73.17	150	45.73	96	29.27	72	21.95	60	18.29	48	14.63	45	13.72
8 AWG / 10 mm ²	574	175.00	381	116.16	239	72.87	153	46.65	115	35.06	95	28.96	76	23.17	71	21.65

WIRING DIAGRAMS - STATIC WHITE / STATIC COLOR / RGBW / RGBA / RGBWW

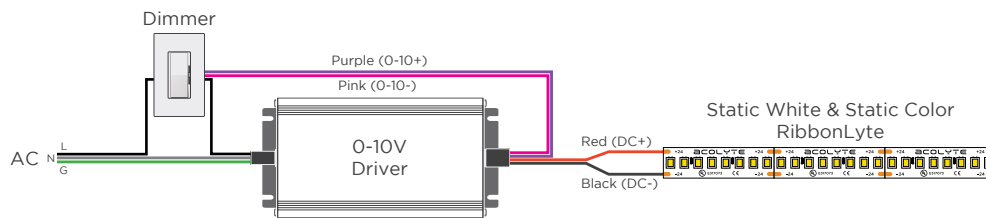
0-10 V




MLV / ELV

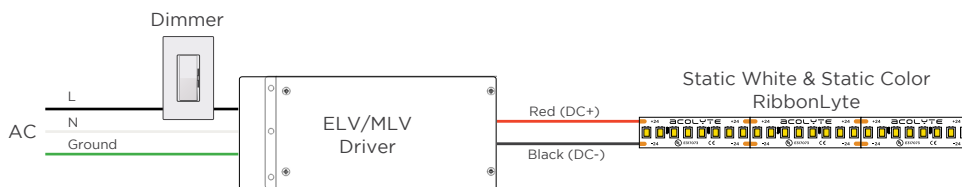

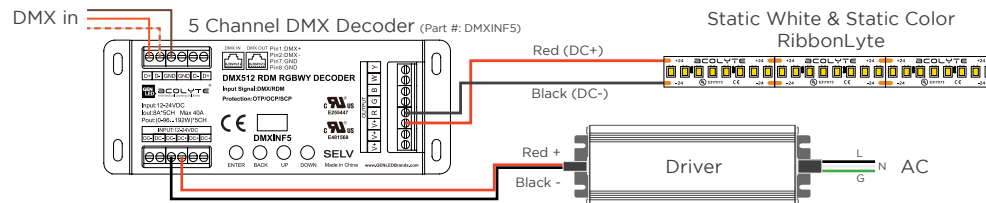
DMX WIRING WITH STATIC WHITE & STATIC COLOR RIBBONLYTE



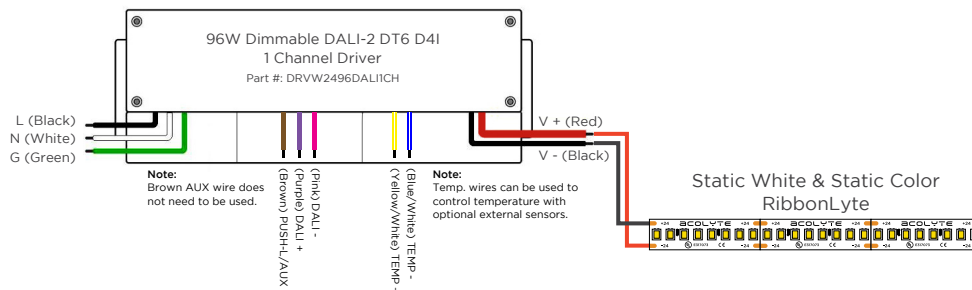
DALI-2 WIRING WITH STATIC WHITE & STATIC COLOR RIBBONLYTE



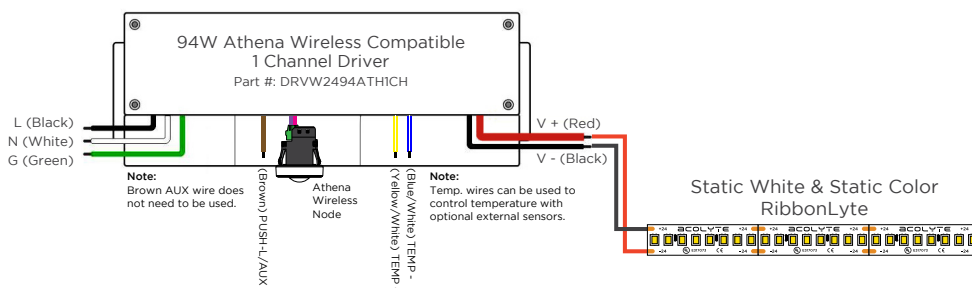STATIC WHITE & STATIC COLOR RIBBONLYTE WIRING WITH ATHENA WIRELESS COMPATIBLE DRIVER



DMX WITH RGBWW 5-IN-1 RIBBONLYTE

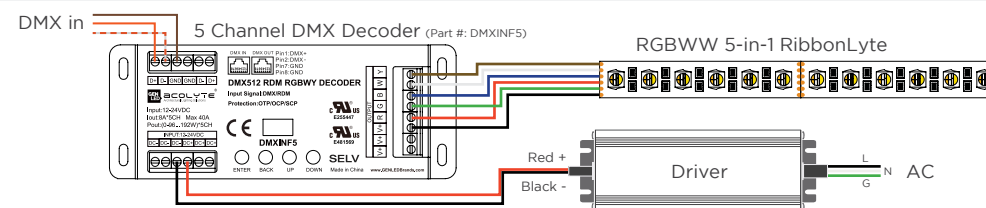

WIRE COLORS PER RIBBONLYTE COLOR

STATIC WHITE + STATIC COLOR

Red Wire (+) Positive
Black Wire (-) Negative

RGBW + RGBA

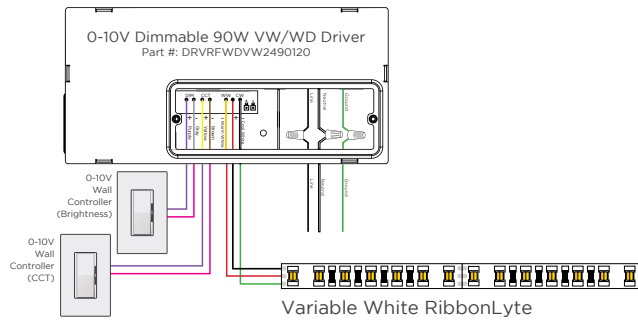
Red Wire (+) Positive
Green Wire (-) goes to Green Channel
Red Wire (-) goes to Red Channel
Blue Wire (-) goes to Blue Channel
White Wire (-) goes to White Channel

RGBWW

Black (+) Positive
Green Wire (-) goes to Green Channel
Red Wire (-) goes to Red Channel
Blue Wire (-) goes to Blue Channel
White Wire (-) goes to White Channel 1
Brown Wire (-) goes to White Channel 2

WIRING DIAGRAMS - VARIABLE WHITE

2-CHANNEL VARIABLE WHITE DIMMING




WIRE COLORS PER RIBBONLYTE COLOR


VARIABLE WHITE

Black Wire (+) Positive
Red Wire (-) goes to Warm White Channel
Green Wire (-) goes to Cool White Channel

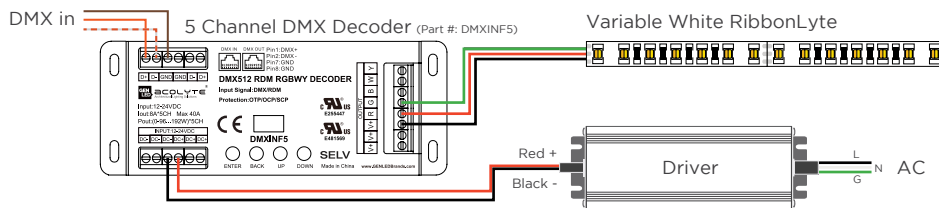
DMX WIRING WITH VARIABLE WHITE RIBBONLYTE



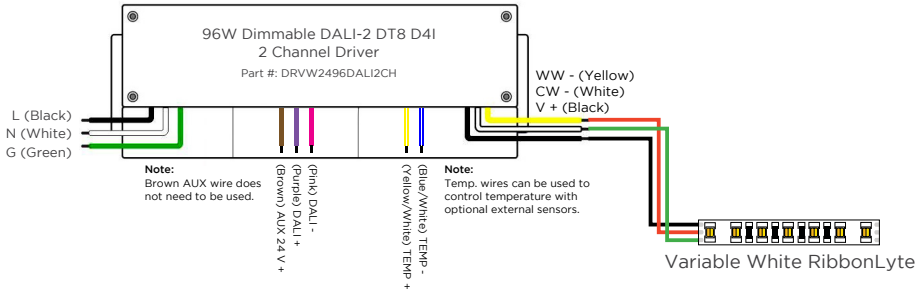DALI-2 WIRING WITH VARIABLE WHITE RIBBONLYTE



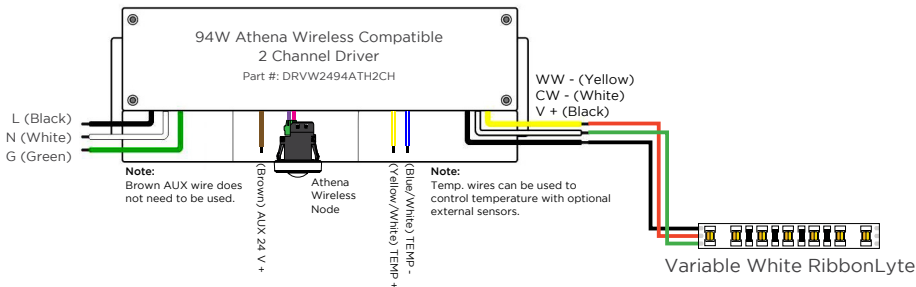VARIABLE WHITE RIBBONLYTE WIRING WITH ATHENA WIRELESS COMPATIBLE DRIVER




WIRING DIAGRAMS WITH RGBW ADDRESSABLE RIBBONLYTE

One DMX Universe consists of 128 addresses and 512 channels (42 ft / 12.8 m of RibbonLyte).

Any single run of RibbonLyte that is less than 16 ft, 4 in. can be wired directly to the controller.

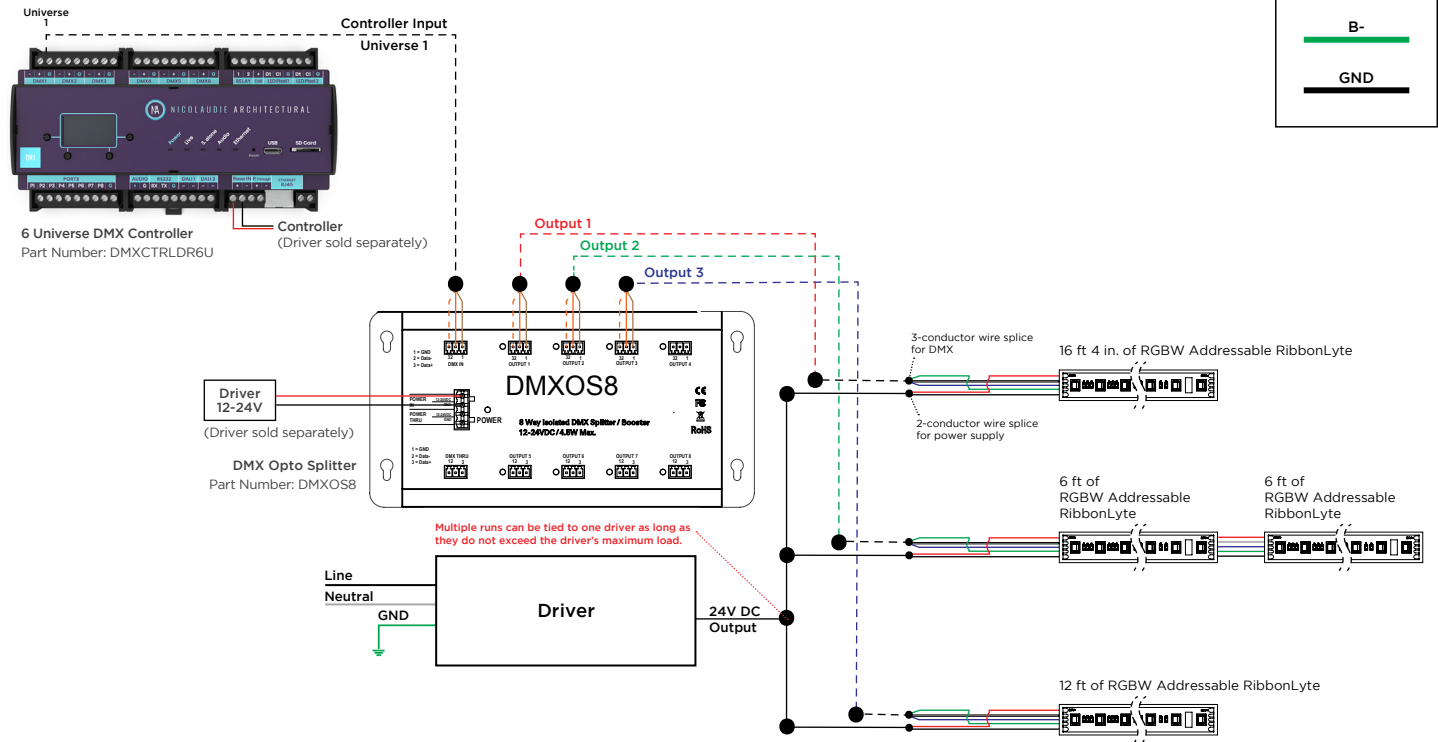For additional runs, Opto Splitter must be used. Each individual run will need its own Opto Splitter output.



REV.31AUG2026

GLOBAL HQ

320 Murray Hill Pkwy
East Rutherford, NJ 07073
U.S.
T: (+1) 212 629 6830
E: Sales-US@GENLEDBrands.com

EUROPEAN HQ

Hogeweyselaan 119
1382 JK Weesp
Netherlands
T: (+31) 346 235 000
E: SalesEurope@GENLEDBrands.com

MEINA HQ

PO Box 371378, #823, Building 4EA
Dubai Airport Free Zone
Dubai, UAE
T: (+971) 4 701 7901
E: SalesMEINA@genledbrands.com

ASIA-PACIFIC HQ

Room 402, Building D
Shenshi Tongchuang Science and Technology Park
No. 16 Hongyin Road
Xingqiang Community, Xinhua Street
Guangming District, Shenzhen, China 518107
T: (+86) 755 8529 0710
E: Sales-Pacific@GENLEDBrands.com