



## AS22L CHANNEL FIXTURE

AS22L is a surface mounted aluminum channel extrusion with a choice between milky and prismatic lenses or specialty focused lenses that provide 30° or 60° wall washing and grazing angles. An optional grille louver or honeycomb louver offers added glare control. Pair AS22L with our RibbonLyte to create complete custom fixtures.


- Surface mounted profile
- Sold by the foot. Factory or field cuttable to any length
- Milky lens with 90x115° beam angle, Prismatic lens, 30° grazer or 60° grazer lens
- Grille or Honeycomb louvers available
- UGR (Grille louver with Milky lens): <16.4  
UGR (Honeycomb louver with Milky lens): <13.3  
UGR (Honeycomb louver with Prismatic lens): <13.9  
UGR (Grille louver with 30° lens): <18.6  
UGR (Honeycomb louver with 30° lens): <15.5  
UGR (Grille louver with 60° lens): <18.5  
UGR (Honeycomb louver with 60° lens): <15.6  
(see chart for beam angle with louvers)
- Mount with Mounting Clips, Tilttable Stands or Magnetic Mounts
- For interior applications only

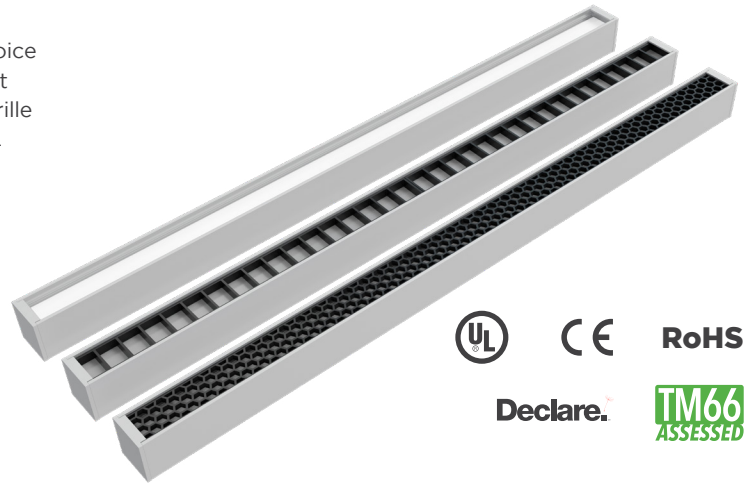


## LENS OPTIONS (can pair with louver options)

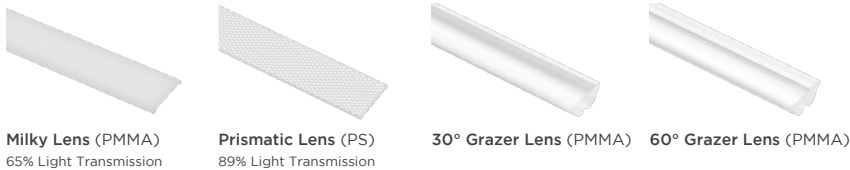


## LOUVER OPTIONS

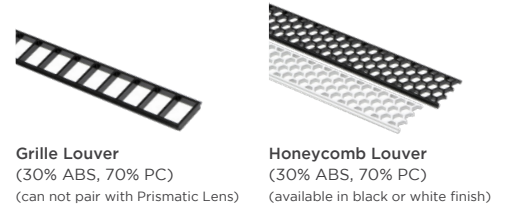

## HOUSING FINISHES




## AVAILABLE COLORS & COLOR TEMPERATURES




## DIMENSIONS

### AS22L Channel

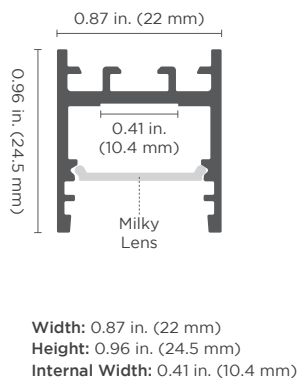

### Pair lenses with louvers for glare reduction



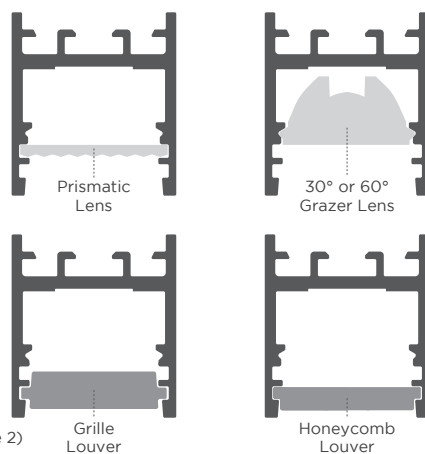


### Note:

1. Magnetic mounting option available (see page 2)
2. This channel is for interior applications only

### Mounting Clip (included accessory)

Material: stainless steel






**Width:** 0.59 in. (15 mm)  
**Length:** 0.65 in. (16.4 mm)  
**Height:** 0.22 in. (5.5 mm)

## SPECIFICATIONS

|                         |                                                                                                                                                                                                                                                                                                                                                                                                                            |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Beam Angle              | Milky Lens: 90x115°, Prismatic Lens: 60x91°, 30° Grazer Lens: 38x84°, 60° Grazer Lens: 69x101°<br>Grille Louver with Milky Lens: 89x82°, Grille Louver with 30° Grazer Lens: 38x69°, Grille Louver with 60° Grazer Lens: 65x76°<br>Honeycomb Louver with Milky Lens: 66x74°, Honeycomb Louver with Prismatic Lens: 51x71°,<br>Honeycomb Louver with 30° Grazer Lens: 34x63°, Honeycomb Louver with 30° Grazer Lens: 62x71° |
| Lens Type               | Milky Lens (PMMA), Prismatic Lens (PS), 30° Grazer Lens (PMMA), 60° Grazer Lens (PMMA)                                                                                                                                                                                                                                                                                                                                     |
| Louver Type             | Grille Louver (not compatible with Prismatic Lens), Honeycomb Louver                                                                                                                                                                                                                                                                                                                                                       |
| Length                  | Channel is sold by the foot and cut to your exact desired length. Required amount of mounting clips included.                                                                                                                                                                                                                                                                                                              |
| Operating Voltage       | 24 V                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Dimming                 | MLV / 0-10 Volt / ELV / DALI / DMX / CASAMBI                                                                                                                                                                                                                                                                                                                                                                               |
| Operating Temperature   | -40 — 158 °F (-40 — 70 °C)                                                                                                                                                                                                                                                                                                                                                                                                 |
| Colors                  | 1800K, 2000K, 2200K, 2400K, 2700K, 3000K, 3500K, 4000K, 6000K, Red, Amber, Green, Blue, Pixel RGB, VW, Warm Dim (1800K, 2000K, 2200K, Pixel RGB only available in IP20)                                                                                                                                                                                                                                                    |
| CRI                     | 90+ CRI (for Static White LEDs only)                                                                                                                                                                                                                                                                                                                                                                                       |
| Lifetime (L70 reported) | 50,000 hours                                                                                                                                                                                                                                                                                                                                                                                                               |
| MacAdam ellipse (SDCM)  | 1-Step Binning (for Static White LEDs only)                                                                                                                                                                                                                                                                                                                                                                                |
| Certifications          | UL Listed UL 2108 Issued: 2004/02/27 Ed: 1 Rev: 2014/02/24 Low Voltage Lighting Systems CSA C22.2#9.0 Issued: 1996/06/01 Ed: 1 (R2011) General Requirements for Luminaires; with Gen. Inst. 1: 1997, Gen Inst. 2: 1998. ROHS compliant                                                                                                                                                                                     |

## ACCESSORIES
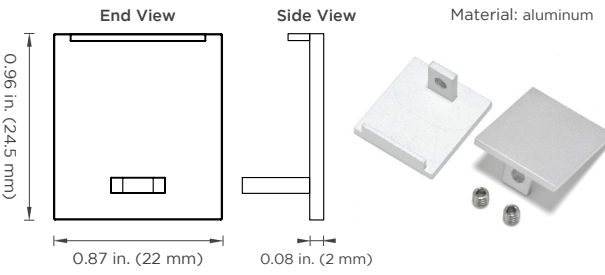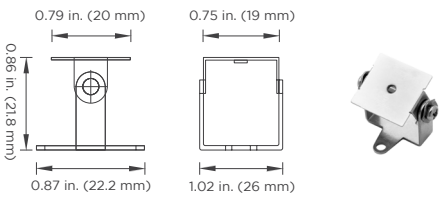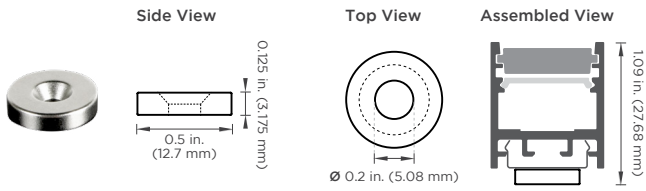
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                            |                                                                                                                                             |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| <b>End Cap</b><br>(included accessory)<br><br>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | <b>180° Coupler</b><br>(Part #: CHAS22LCOUP180)<br><br> | <b>Tiltable Stand</b><br>(Part #: TILTSTANDST)<br><br> |
| <b>Magnetic Mount</b> (Part #: CHMAG0.5)<br><br> <p><b>Features:</b></p> <ul style="list-style-type: none"> <li>- High-energy neodymium magnets come attached to mounting clips with countersink hex nuts</li> <li>- Create easy-mount magnetic channels with minimal surface gaps; no tools or drilling necessary</li> <li>- Magnets rated for 8 lbs. of pull force with static load</li> </ul> <p><b>Applications:</b></p> <ul style="list-style-type: none"> <li>- Industrial lighting retrofits for troffers and other metal fixtures</li> <li>- Metal retail shelf lighting</li> <li>- Temporary light fixture installations</li> </ul> |                                                                                                                                            |                                                                                                                                             |

## STATIC WHITE SERIES 2 RIBBONLYTE SPECIFICATIONS, COMPATIBILITY & DELIVERED LUMEN OUTPUT

| RibbonLyte Type       | Wattage  | CCT   | Incremental Length | LED Pitch               | Max. Length (IP20) | Delivered Lumen at 3000K with Milky Lens |      | Compatibility with AS22L Channel |      |      |      | Diode Visibility<br>Visible = Y<br>Not Visible = N |
|-----------------------|----------|-------|--------------------|-------------------------|--------------------|------------------------------------------|------|----------------------------------|------|------|------|----------------------------------------------------|
|                       |          |       |                    |                         |                    | lm/ft                                    | lm/m | IP20                             | IP65 | IP68 | IP69 |                                                    |
| Static White Series 2 | 3.0 W/ft | 3000K | 1.97 in. (50 mm)   | 48 LEDs/ft (160 LEDs/m) | 36 ft (11 m)       | 175                                      | 575  | ✓                                | ✓    |      |      | N                                                  |

Lumen Multiplier by CCT (Static White Series 2 RibbonLyte)

| CCT (3.0 W/ft)      | 1800K | 2000K | 2200K | 2400K | 2700K | 3000K | 3500K | 4000K | 6000K |
|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| <b>B</b> Multiplier | 0.67  | 0.79  | 0.85  | 0.91  | 0.97  | 1.00  | 1.03  | 1.00  | 1.08  |

**A** x **B** x **C** = Lumen Output

Lumen Multiplier by Wattage (Static White Series 2 RibbonLyte)

| Wattage             | 0.75 w/ft | 1.5 w/ft | 2.2 w/ft | 3.0 w/ft | 4.4 w/ft | 5.0 w/ft | 6.0 w/ft |
|---------------------|-----------|----------|----------|----------|----------|----------|----------|
| <b>C</b> Multiplier | 0.26      | 0.51     | 0.73     | 1.00     | 1.45     | 1.60     | 1.96     |

ORDERING GUIDE

**STEP 1** Complete Channel Part Number

| CHANNEL                 | LENS                                                                                                                                                         | LOUVER                                                                                                                      | HOUSING COLOR                                                                                                                                |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CHAS22L</b>          |                                                                                                                                                              |                                                                                                                             |                                                                                                                                              |
| CHAS22L - AS22L Channel | <b>M</b> - Milky Lens<br><b>P</b> - Prismatic Lens<br><b>30</b> - 30° Grazer Lens*<br><b>60</b> - 60° Grazer Lens*<br>* Only compatible with IP20 RibbonLyte | <b>O</b> - Without a louver<br><b>G</b> - Grille Louver (not compatible with Prismatic Lens)<br><b>H</b> - Honeycomb Louver | <b>SV</b> - Silver (default)<br><b>BK</b> - Black**<br><b>WH</b> - White**<br>** Additional fee applies<br>Consult factory for custom colors |

**STEP 2** Complete RibbonLyte Part Number

| CATEGORY        | CRI                                                                         | RIBBON TYPE & IP RATING                                                                                                                                                              |                                                                                                                                    |                                                                                                                    |
|-----------------|-----------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|
| <b>RB</b>       |                                                                             |                                                                                                                                                                                      |                                                                                                                                    |                                                                                                                    |
| RB - RibbonLyte | <b>0</b> - Static Color, Color Changing<br><b>90</b> - 90+ CRI Static White | <b>SWS220</b> - Static White Series 2 IP20<br><b>SWS265</b> - Static White Series 2 IP65<br><b>SCS220</b> - Static Color Series 2 IP20<br><b>SCS265</b> - Static Color Series 2 IP65 | <b>VWS220</b> - VW Series 2 IP20<br><b>VWS265</b> - VW Series 2 IP65<br><b>WD20</b> - Warm Dim IP20<br><b>WD65</b> - Warm Dim IP65 | <b>LINEA20</b> - Linea RibbonLyte IP20<br><b>XACTA20</b> - Xacta RibbonLyte IP20<br><b>RGBADD</b> - Pixel RGB IP20 |

**NOTE:** To ensure waterproofing standards are met, IP65 RibbonLyte can NOT be cut in the field.

WATTAGE

**0.75** - 0.75 W/ft (2.46 W/m - Static White, Static Color)  
**1.0** - 1.0 W/ft (3.3 W/m - Variable White)  
**1.5** - 1.5 W/ft (4.9 W/m - Static White, Static Color, Variable White)  
**2.2** - 2.2 W/ft (7.2 W/m - Static White, Static Color)  
**2.4** - 2.4 W/ft (8 W/m - Static White Linea)  
**3.0** - 3.0 W/ft (9.8 W/m - Static White, Static Color, Variable White)  
**4.3** - 4.3 W/ft (14 W/m - Static White Linea)  
**4.4** - 4.4 W/ft (14.4 W/m - Static White, Static Color)  
**4.5** - 4.5 W/ft (14.8 W/m - Static White, Variable White)  
**5.0** - 5.0 W/ft (16.4 W/m - Static White, Static Color)  
**5.2** - 5.2 W/ft (17.1 W/m - Warm Dim)  
**6.0** - 6.0 W/ft (19.7 W/m - Static White, Static Color, Variable White)  
**6.1** - 6.1 W/ft (20 W/m - Variable White Linea, Pixel RGB)


COLOR

**18** - 1800K  
**20** - 2000K  
**22** - 2200K  
**24** - 2400K  
**27** - 2700K  
**30** - 3000K  
**35** - 3500K  
**40** - 4000K  
**60** - 6000K  
**R** - Red  
**A** - Amber  
**G** - Green  
**B** - Blue  
**RGBS** - Pixel RGB (SPI)  
**VW** - Variable White 2000K-6500K  
**VW1833** - Variable White 1800K-3300K (IP20)  
**2920** - Warm Dim 2900K-2000K (IP20)  
**1830** - Warm Dim 3000K-1800K (IP20)  
**2721** - Warm Dim 2700K-2100K (IP65)  
**Z** - Undecided (For quotes only. Must be chosen before final order.)

CONNECTION OPTIONS (See diagrams on the right)

- |                                    |                                     |
|------------------------------------|-------------------------------------|
| 1 - End Feed Bare Wire Connection  | 4 - End Feed with IP67 Male Coupler |
| 2 - Back Feed Bare Wire Connection | 5 - Soldered Daisy Chain            |
| 3 - Side Feed Bare Wire Connection | 6 - Daisy Chain With IP67 Couplers  |

Custom Length (ft.)

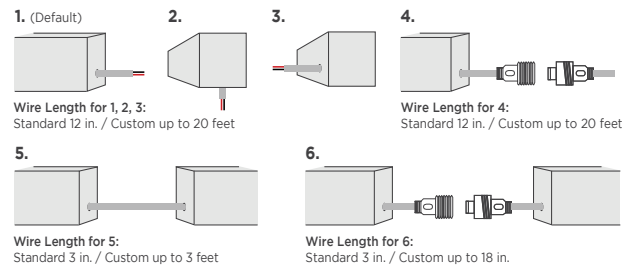

**STEP 3** Complete Assembly Option & Length

| ASSEMBLY OPTION | LENGTH (Standard factory assembled length up to 6 ft 6.7 in. / 2 m) |
|-----------------|---------------------------------------------------------------------|
|-----------------|---------------------------------------------------------------------|

- FI** - Field Assembly  
**FA** - Factory Assembly\*\*\* (not recommended for exterior applications)


\*\*\* Factory assembled runs exceeding 6 ft 6.7 in. (2 m) will be split into multiple daisy chained fixtures.

**STEP 4** Add Accessories

ACCESSORIES

- TILTSTANDST** - Tilttable Stand  
**CHMAGO.5** - Magnetic Mount  
**CHAS22LCOUP180** - 180° Coupler

**DO NOT BUTT END CAPS AGAINST EACH OTHER WHEN CREATING LONGER FIXTURES**  
 Acolyte STRONGLY SUGGESTS field assembly (without using interior end caps) for direct-view fixtures of more than 6 ft 6.7 in. (2 m) in length. Field assembly without interior end caps will eliminate gaps or dead spots that can be caused by butting interior end caps against each other.

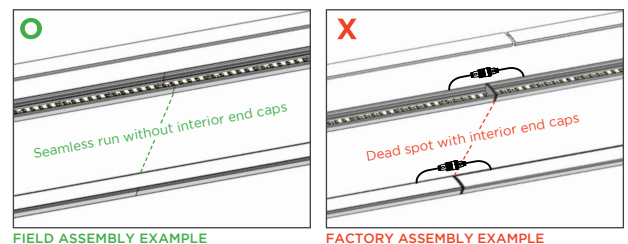

AVAILABLE DRIVERS / CONTROLLERS AND DIMMING OPTIONS / WIRE GAUGE CHART

| 0-10V/ELV/MLV 3-IN-1                                                                                                                                                                                                                      | ELV                                                                                                                                                                                                                                            | 0-10V VW/WD                                                                                                                                                                                                                     | COMPACT                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                                                                           |                                                                                                                                                               |                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                        |
| <b>60W, 96W, 288W 0-10V/ELV/MLV 3-in-1 Dimmable Drivers</b><br><br>Part No.:<br>• DRVW2460TRI010 (60 W)<br>• DRVW2496TRI010 (96 W)<br>• DRVW24288TRI010 (288 W)<br><br>24 VDC<br>120-277 VAC<br>IP65, dry/damp/wet locations<br>UL Listed | <b>60W Dimmable Driver</b><br><br>Part No.:<br>• DRVW2460ELV<br><br>24 VDC<br>100-130 VAC<br>Fits in single-gang switch boxes<br>IP20, dry locations<br>UL Recognized                                                                          | <b>0-10V Dimmable 90W VW/WD Driver</b><br><br>Part No.:<br>• DRVRFWDVW2490120<br><br>24 VDC<br>100-277 VAC<br>IP23, dry/damp locations<br>UL Listed                                                                             | <b>60W, 96W Non-Dimming Compact Drivers</b><br><br>Part No.:<br>• DRV2460C (60 W)<br>• DRV2496C (96 W)<br><br>24 VDC<br>120-277 VAC<br>IP20, dry locations<br>UL Class P                                                                                                                                                                                                                                                                  |
| ATHENA WIRELESS COMPATIBLE                                                                                                                                                                                                                | CASAMBI COMPATIBLE DRIVERS                                                                                                                                                                                                                     | DIMMABLE DALI-2 DRIVERS                                                                                                                                                                                                         | DIMMABLE DALI-2 DRIVERS                                                                                                                                                                                                                                                                                                                                                                                                                   |
|                                                                                                                                                           |                                                                                                                                                               |                                                                                                                                                |                                                                                                                                                                                                                                                                                                                                                        |
| <b>94W Athena Wireless Compatible Drivers</b><br><br>Part No.:<br>• DRVW2494ATH1CH (1 channel)<br>• DRVW2494ATH2CH (2 channel)<br><br>24 VDC<br>100-277 VAC<br>Dry locations<br>UL Listed                                                 | <b>100W &amp; 200W Casambi Compatible 4 Channel Drivers</b><br><br>Part No.:<br>• DRVW24100CAS4CH (100 W)<br>• DRVW24200CAS4CH (200 W)<br><br>24 VDC<br>100-277 VAC<br>IP66, dry/damp/wet locations<br>UL Listed, CE, RoHS, Bluetooth, CASAMBI | <b>96W DIMMABLE DALI-2 DT6 D4I &amp; DALI-2 DT8 D4I DRIVERS</b><br><br>Part No.:<br>• DRVW2496DALI1CH (1 channel)<br>• DRVW2496DALI2CH (2 channel)<br><br>24-26 VDC<br>120-277 VAC<br>IP67, dry/damp/wet locations<br>UL Listed | <b>75W, 150W, 240W DALI-2 Dimmable Drivers</b><br><br>Part No.:<br>• DRVW2475DALI1CH (75 W, 1 channel)<br>• DRVW24150DALI1CH (150 W, 1 channel)<br>• DRVW24240DALI1CH (240 W, 1 channel)<br>• DRV24150DALI2CH (150 W, 2 channels)<br>• DRV24150DALI4CH (150 W, 4 channels)<br><br>24 VDC<br>120-277 VAC<br>IP67, damp/wet locations (1-channel drivers only)<br>IP20, dry location (2-channel & 4-channel drivers only)<br>CE, RoHS, SELV |

DMX CONTROLLERS, VARIABLE WHITE DIMMER, WARM DIM DIMMER - FOR COLOR CHANGING FIXTURES


|                                                                                         |                                                                                     |                                                                                     |                                                                                      |                                                                                       |
|-----------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|      |  |  |  |  |
| <b>GLASS TOUCH WALL CONTROLLERS</b><br>Part No.:<br>• AWCRCBWWBK<br>• AWCWBK            | <b>1 ZONE WALL CONTROLLER</b><br>Part No.: DMXCTRLG                                 | <b>5 ZONE WALL CONTROLLER</b><br>Part No.: DMXCTRL                                  | <b>10 ZONE WALL CONTROLLER</b><br>Part No.: DMXCTRLD                                 | <b>6 UNIVERSE DMX CONTROLLER</b><br>Part No.: DMXCTRLDR6U                             |
|       |  |  |  |  |
| <b>VARIABLE WHITE DIMMER</b><br>Part No.:<br>• RFDIMVWWH (White)<br>• RFDIMVWBK (Black) | <b>WARM DIM DIMMER</b><br>Part No.:<br>• RFDIMVDWH (White)<br>• RFDIMWDBK (Black)   | <b>4 CHANNEL WATERPROOF DMX INTERFACE</b><br>Part No.: DMXINFWLC4D                  | <b>5 CHANNEL DMX DECODER</b><br>Part No.: DMXINF5                                    | <b>DMX OPTO SPLITTER</b><br>Part No.: DMXOS8                                          |

DRIVER AND RIBBONLYTE AT FULL LOAD


| Wattages                      | 30   |        | 60   |        | 96   |        | 150  |        | 200  |        | 240  |        | 300  |        | 320  |        |
|-------------------------------|------|--------|------|--------|------|--------|------|--------|------|--------|------|--------|------|--------|------|--------|
| Wire Gauge                    | Feet | Meters | Feet | Meters | Feet | Meters | Feet | Meters | Feet | Meters | Feet | Meters | Feet | Meters | Feet | Meters |
| 24 AWG / 0.25 mm <sup>2</sup> | 14   | 4.27   | 9    | 2.74   | 5.5  | 1.68   | 3.75 | 1.14   | 2.75 | 0.84   | 2.25 | 0.69   | 1.75 | 0.53   | 1.75 | 0.53   |
| 22 AWG / 0.34 mm <sup>2</sup> | 22   | 6.71   | 14   | 4.27   | 9    | 2.74   | 5.75 | 1.75   | 4.5  | 1.37   | 3.5  | 1.07   | 2.75 | 0.84   | 2.75 | 0.84   |
| 20 AWG / 0.5 mm <sup>2</sup>  | 35   | 10.67  | 23   | 7.01   | 14   | 4.27   | 9    | 2.74   | 7    | 2.13   | 5.75 | 1.75   | 4.5  | 1.37   | 4.25 | 1.30   |
| 18 AWG / 0.75 mm <sup>2</sup> | 56   | 17.07  | 37   | 11.28  | 23   | 7.01   | 15   | 4.57   | 11   | 3.35   | 9    | 2.74   | 7.5  | 2.29   | 7    | 2.13   |
| 16 AWG / 1.5 mm <sup>2</sup>  | 90   | 27.44  | 60   | 18.29  | 37   | 11.28  | 24   | 7.32   | 18   | 5.49   | 15   | 4.57   | 12   | 3.66   | 11   | 3.35   |
| 14 AWG / 2.5 mm <sup>2</sup>  | 142  | 43.29  | 95   | 28.96  | 59   | 17.99  | 38   | 11.59  | 28   | 8.54   | 23   | 7.01   | 19   | 5.79   | 17   | 5.18   |
| 12 AWG / 4 mm <sup>2</sup>    | 226  | 68.90  | 151  | 46.04  | 94   | 28.66  | 60   | 18.29  | 45   | 13.72  | 37   | 11.28  | 30   | 9.15   | 28   | 8.54   |
| 10 AWG / 6 mm <sup>2</sup>    | 360  | 109.76 | 240  | 73.17  | 150  | 45.73  | 96   | 29.27  | 72   | 21.95  | 60   | 18.29  | 48   | 14.63  | 45   | 13.72  |
| 8 AWG / 10 mm <sup>2</sup>    | 574  | 175.00 | 381  | 116.16 | 239  | 72.87  | 153  | 46.65  | 115  | 35.06  | 95   | 28.96  | 76   | 23.17  | 71   | 21.65  |

## WIRING DIAGRAMS - STATIC WHITE / STATIC COLOR


### 0-10 V

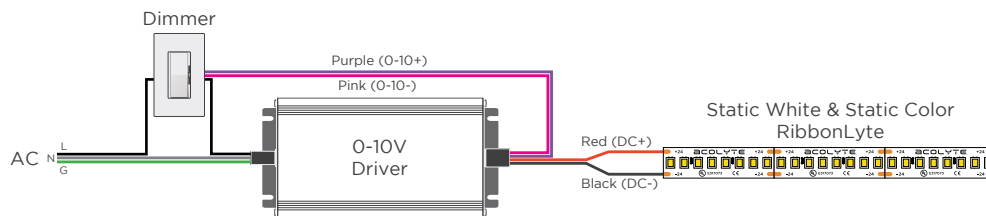


### MLV / ELV

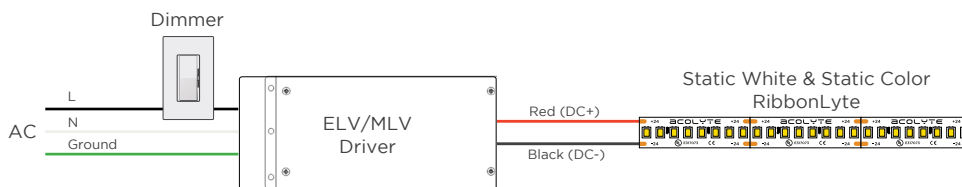


### DMX WIRING WITH STATIC WHITE & STATIC COLOR RIBBONLYTE

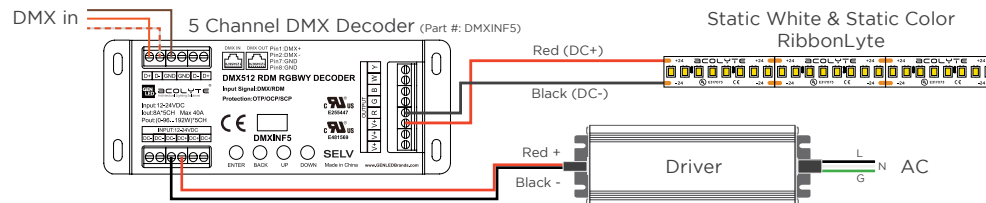


### DALI-2 WIRING WITH STATIC WHITE & STATIC COLOR RIBBONLYTE

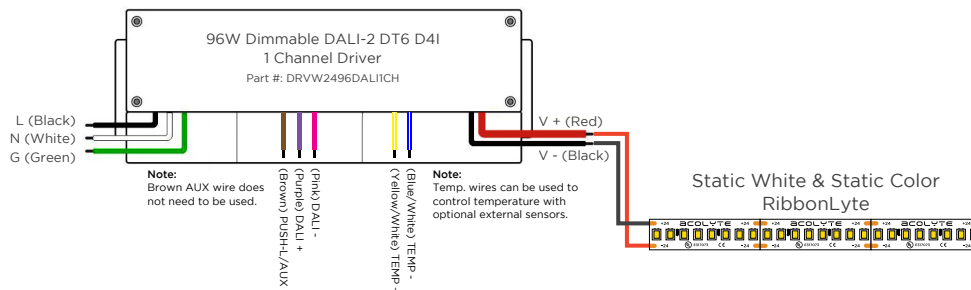

### STATIC WHITE & STATIC COLOR RIBBONLYTE WIRING WITH ATHENA WIRELESS COMPATIBLE DRIVER

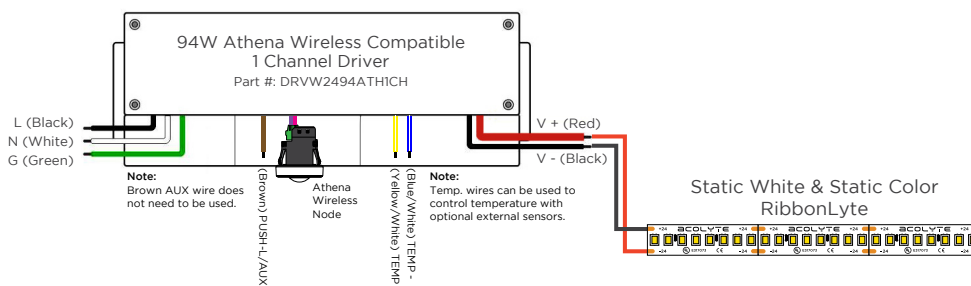

### DMX WITH STATIC WHITE & STATIC COLOR RIBBONLYTE

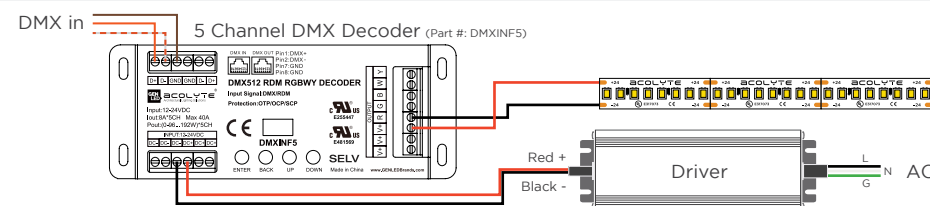


### WIRE COLORS PER RIBBONLYTE COLOR

**STATIC WHITE + STATIC COLOR**  
Red Wire (+) Positive  
Black Wire (-) Negative

## WIRING DIAGRAMS - VARIABLE WHITE

### 2-CHANNEL VARIABLE WHITE DIMMING

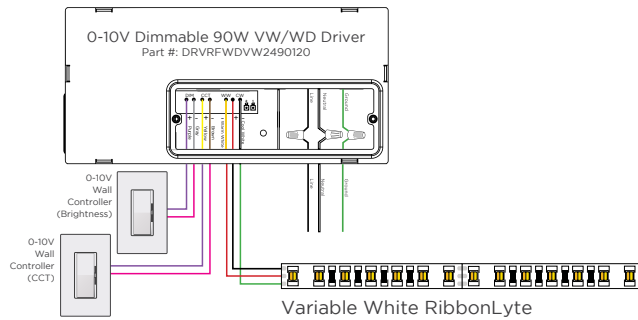


### WIRE COLORS PER RIBBONLYTE COLOR


#### VARIABLE WHITE

Black Wire (+) Positive  
Red Wire (-) goes to Warm White Channel  
Green Wire (-) goes to Cool White Channel


### DMX WIRING WITH VARIABLE WHITE RIBBONLYTE

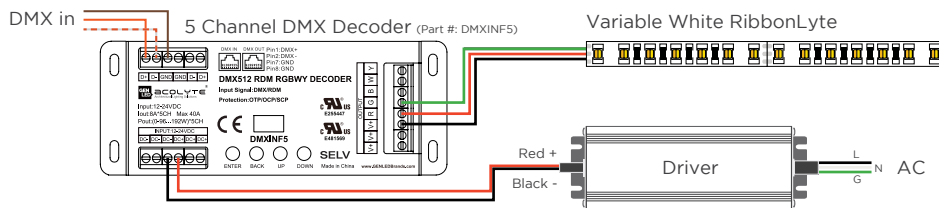

### DALI-2 WIRING WITH VARIABLE WHITE RIBBONLYTE

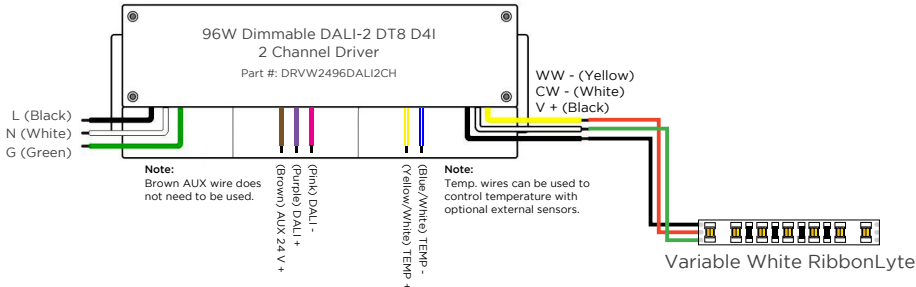

### VARIABLE WHITE RIBBONLYTE WIRING WITH ATHENA WIRELESS COMPATIBLE DRIVER

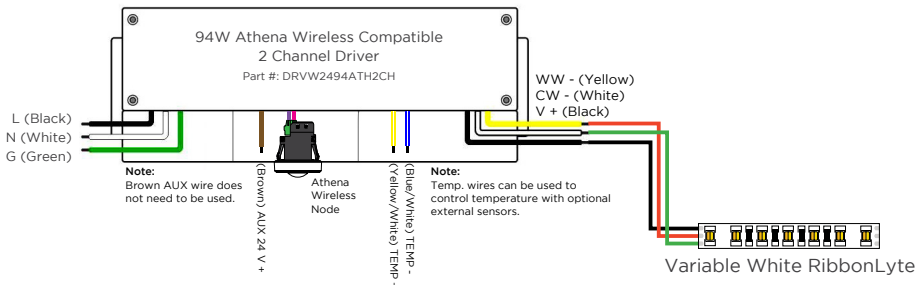

REV.16JUL2026

#### GLOBAL HQ

320 Murray Hill Pkwy  
East Rutherford, NJ 07073  
U.S.  
T: (+1) 212 629 6830  
E: Sales-US@GENLEDBrands.com

#### EUROPEAN HQ

Hogeweyselaan 119  
1382 JK Weesp  
Netherlands  
T: (+31) 346 235 000  
E: SalesEurope@GENLEDBrands.com

#### MEINA HQ

PO Box 371378, #823, Building 4EA  
Dubai Airport Free Zone  
Dubai, UAE  
T: (+971) 4 701 7901  
E: SalesMEINA@genledbrands.com

#### ASIA-PACIFIC HQ

Room 402, Building D  
Shenshi Tongchuang Science and Technology Park  
No. 16 Hongyin Road  
Xingqiang Community, Xinhua Street  
Guangming District, Shenzhen, China 518107  
T: (+86) 755 8529 0710  
E: Sales-Pacific@GENLEDBrands.com