



Date \_\_\_\_\_ Project \_\_\_\_\_

Notes \_\_\_\_\_

**PC3 LINEARLYTE PENDANT FIXTURE**

Create a beautifully lit space with one of our nine pendant fixture profiles. PC3 linear fixture is sold in 1 foot increments, with 5 different color temperature options.

- Sold in 1 foot (304.8 mm) or 1/2 meter increments
- UV Resistant lenses
- 0-10 V or DALI Dimmable
- Standard powdercoating in Silver, Black, and White (Custom colors available)
- Assembled in USA

**Applications:**

- |               |               |             |
|---------------|---------------|-------------|
| Commercial    | Hospitality   | Residential |
| Entertainment | Museums       | Retail      |
| Healthcare    | Public Spaces |             |




**RoHS** **IP20**

**ORDERING GUIDE**


Category	Output	Fixture Length		Color Temp	Surface Finish	
PC3						
PC3	LO - Low	2 - 2 ft	6 - 6 ft	0.5m - 0.5 m	27 - 2700K	AL - Aluminum
	SO - Standard	3 - 3 ft	7 - 7 ft	1m - 1 m	30 - 3000K	W - White
	HO - High	4 - 4 ft	8 - 8 ft	1.5m - 1.5 m	35 - 3500K	K - Black
		5 - 5 ft		2m - 2 m	40 - 4000K	C - Custom
				2.4m - 2.4 m	50 - 5000K	*Custom RAL # available.

**AVAILABLE COLOR TEMPERATURES**



SPECIFICATIONS / LUMEN DATA / SUGGESTED SUSPENSION WIRE SEPARATED DISTANCES

SPECIFICATIONS




Beam Angle	105°
Lens Type	Milky
Length	Sold in 1 foot (304.8 mm) or 1/2 meter increments
Operating Voltage	27-54 V
Dimming	0-10V, DALI
Colors	2700K, 3000K, 3500K, 4000K, 5000K
Certifications	RoHS, ETL
Weight	1.30 lbs/ft (1.94 kg/m)
Diameter	4.76 in (120.9 mm)

LUMEN DATA / FIXTURE TESTED AT 3500K



	W/ft	lm/ft	W/2 ft	lm/2 ft	W/4 ft	lm/4 ft	W/8 ft	lm/8 ft	lm/W
LO	6.9	709.0	13.8	1418.0	27.6	2836.0	55.2	5672.0	102.0
SO	9.4	954.0	18.7	1908.0	37.4	3816.0	74.8	7632.0	102.0
HO	11.9	1200.0	23.8	2400.0	47.6	4800.0	95.2	9600.0	101.0

SUGGESTED SUSPENSION WIRE SEPARATED DISTANCES

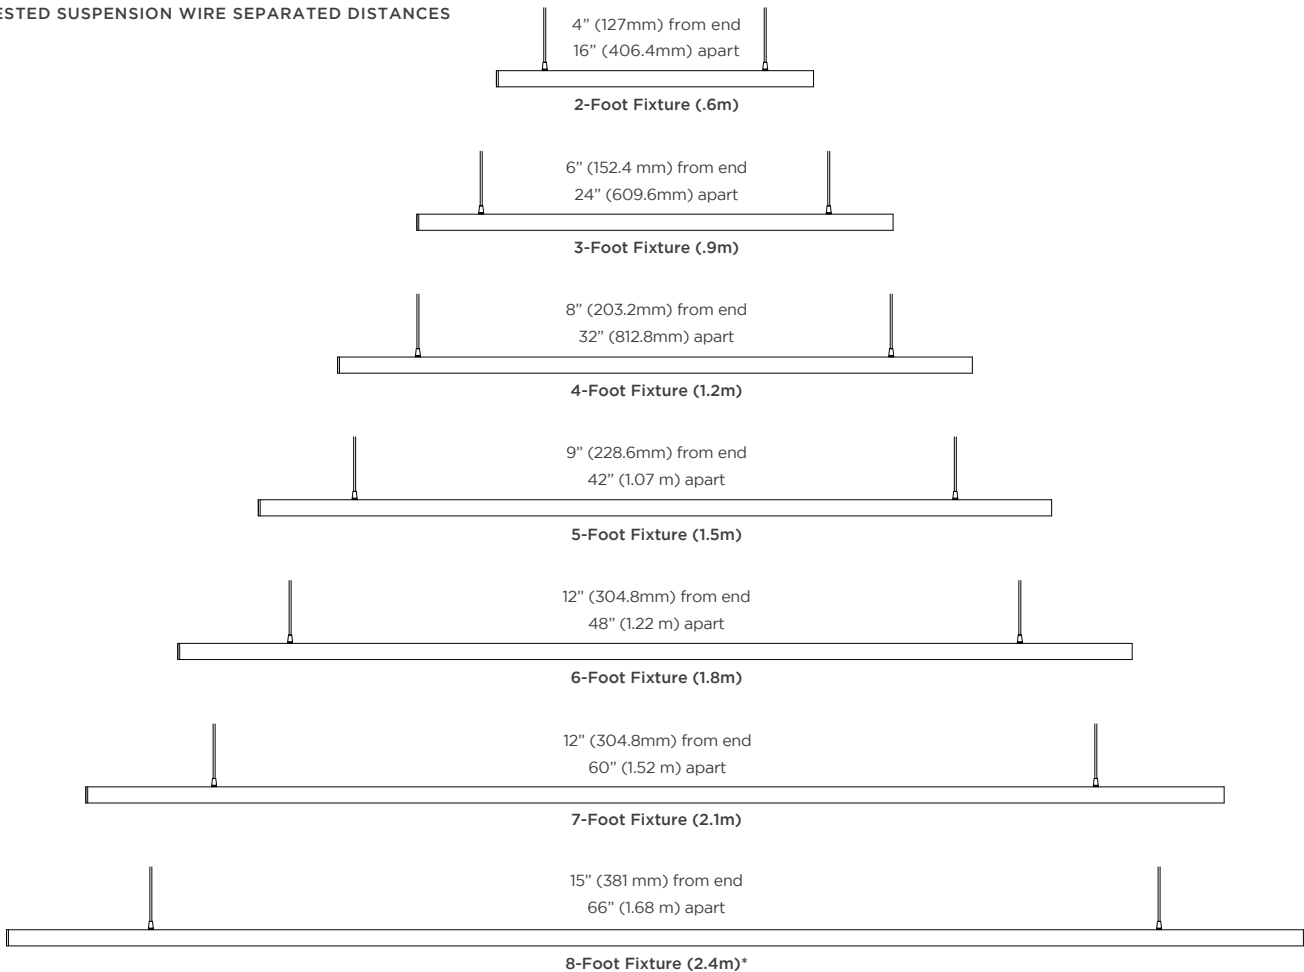

GENLED Acolyte<sup>®</sup> does not warrant or represent that the information is free from errors or omission. The information may change without notice and GENLED Acolyte<sup>®</sup> is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

FIXTURE INSTALLATION

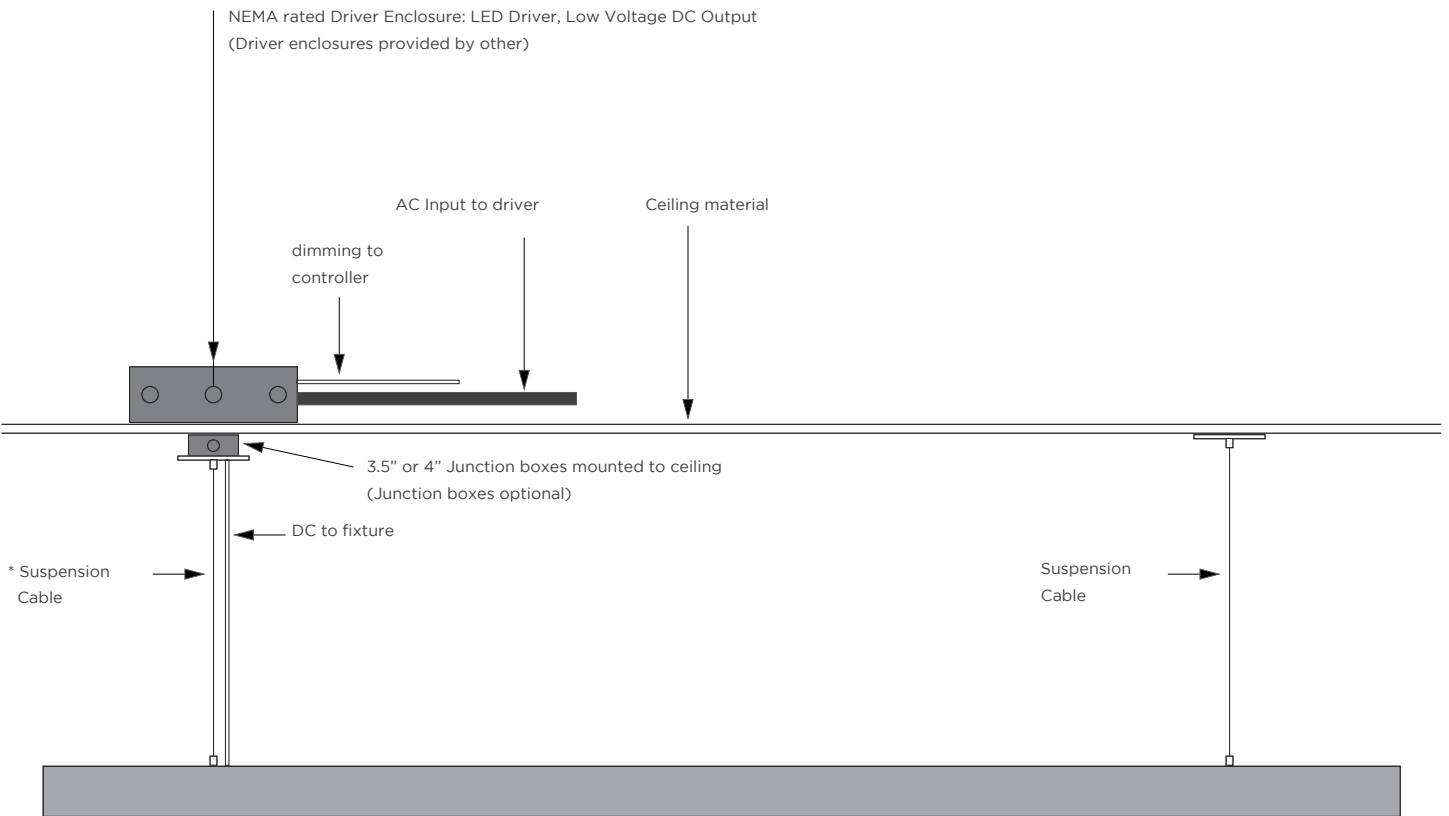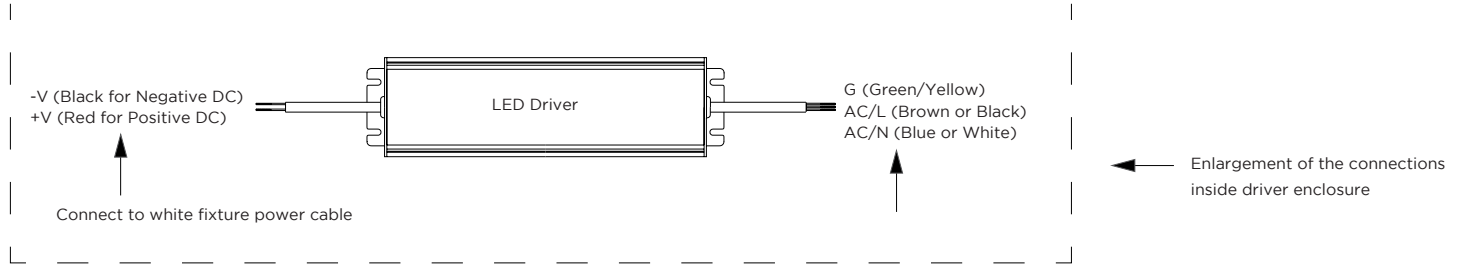

- \* Length of Suspension Cable from ceiling to fixture: 150 inches (3.81 meter)
- \* Field cuttable to any length