

ARMOR SERIES | RGBW MINI EXTERIOR LINEAR FIXTURES

A high-powered wash fixture with 3 optic options, the RGBW MINI will allow you to custom mix specific colors for special events or company, with the ability to switch to a color that will compliment your buildings or installations natural coloring. With 5 different lengths to choose from, you will be able to find the fixtures to suit your installation. Armor Series RGBW MINI fixtures come with 3 year warranty.

GEL-FLUSH™ TECHNOLOGY

The RGBW MINI is now manufactured with Acolyte's Gel Flush™ Technology. This proprietary innovation prevents breaches from any weather-related elements. Acolyte's exterior products are guaranteed to never leak, condensate, or be breached by any environmental elements. This results in a clear and unobstructed beam of light from the our fixtures. No more water beads changing and or refracting the specified beam angles.



Applications:

Commercial Museums
Entertainment Public Spaces



IP66

ORDERING GUIDE

Category	Length	Color	FWHM Beam Angle
MINI		RGBW65	
MINI - Armor RGBW Mini	12 - 12 in. / 305 mm (14W)	RGBW65 - RGBW + 6500K	15 - 15°
	0.5 - 19.7 in. / 500 mm (24W)		25 - 25°
	24 - 24 in. / 610 mm (30W)		35 - 35°
	1.0 - 39.4 in. / 1000 mm (48W)		
	47 - 47 in. / 1190 mm (60W)		

INCLUDED ACCESSORIES:

- 1.) Large Tilttable Stand
TSL

OPTIONAL ACCESSORIES:

- 1.) **Armor Series Mounting Arms:**
Small: ARMORMNT0609
Large: ARMORMNT1422

- 2.) **Glare Shield:**
MINISHLD313 (313 mm)
MINISHLD500 (500 mm)
MINISHLD605 (605 mm)
MINISHLD1000 (1000 mm)
MINISHLD1190 (1190 mm)

- 3.) **2 Pin Female Cable to Bare Wire:**
MINICBLFB300 (300 mm)
MINICBLFB500 (500 mm)
MINICBLFB1000 (1000 mm)
MINICBLFB2000 (2000 mm)

- 4.) **2 Pin Male to 2 Pin Female Jumper Cable:**
MINIJUMPMF1000 (1000 mm)
MINIJUMPMF2000 (2000 mm)

- 5.) **3 Pin Female to Bare Wire DMX Cable:**
MINIDMXFB500 (500 mm)

- 6.) **3 Pin Male to 2 Pin Female DMX Jumper Cable:**

AVAILABLE COLORS



RGBW+6500K

SPECIFICATIONS / DIMENSIONS / LUMEN DATA

Operating Voltage	24V DC				
Length	12 in. / 305 mm	19.7 in. / 500 mm	24 in. / 610 mm	39.4 in. / 1000 mm	47 in. / 1190 mm
Power Consumption	14 W	24 W	30 W	48 W	60 W
LEDs per Fixture	8 LEDs	12 LEDs	15 LEDs	24 LEDs	30 LEDs
Amperage	0.58 A	1 A	1.25 A	2 A	2.5 A
Color / Temperature	RGBW+6500K				
LED Beam Angle	15°, 25°, 35°				
Max Daisy Chained Power	8 fixtures	5 fixtures	4 fixtures	2 fixtures	2 fixtures
Max Daisy Chained DMX	32 fixtures				
Control System	DMX				
LED Binning (SDCM)	3-Step MacAdam ellipse (White Channel Only)				
Ambient Temperature	-40° F to 122° F (-40° C to 50° C)				
Housing / Lens Materials	Housing: Extruded Aluminium / Lens: Clear UV Protected PMMA Cover: Tempered Glass End Caps: Extruded Aluminium / Brackets: Extruded Aluminium Housing, bracket, end cap material - 6063 high density aluminum alloy				
Connector	2 pin power connector / 3 pin DMX signal connector				
Cable Length	11.81" / 300 mm				
Protection Rating	IP66				
Mounting Options	Large Tilttable Stand (180° adjustable), Mounting Arms (available in 2 different sizes)				
Impact Rating	IK08				
Lamp Life	50,000 hours				
Certifications	CE, ETL / Luminaires - UL 1598, 3rd Ed., issued September 17, 2008, Rev. October 17, 2012 / Luminaires - CSA C22.2 No.250.0-08, 3rd Ed., issued September 17, 2008, Rev. October 17, 2012 (R2013)				
Fixture Color Finish	Anodized Silver				

LIGHT OUTPUT FOR 12 IN. / 305 MM

LED Beam Angles	15°					25°					35°				
Color / Temperature	Red	Green	Blue	White	All	Red	Green	Blue	White	All	Red	Green	Blue	White	All
Lumen Output / Foot	155.3	230.9	39.0	277.0	734.7	144.2	248.0	37.2	271.8	735.3	153.8	227.6	39.3	247.6	621.8
Total Lumens	159.1	236.7	40.0	284.0	753.1	147.8	254.2	38.1	278.6	753.7	157.6	233.2	40.2	253.8	637.4

LIGHT OUTPUT FOR 19.7 IN. / 500 MM

LED Beam Angles	15°					25°					35°				
Color / Temperature	Red	Green	Blue	White	All	Red	Green	Blue	White	All	Red	Green	Blue	White	All
Lumen Output / Foot	155.3	230.9	39.0	277.0	734.7	144.2	248.0	37.2	271.8	735.3	153.8	227.6	39.3	247.6	621.8
Total Lumens	254.9	379.1	64.0	454.8	1206.2	236.7	407.1	61.0	446.2	1207.2	157.6	373.6	77.9	253.8	1020.8

LIGHT OUTPUT FOR 24 IN. / 610 MM

LED Beam Angles	15°					25°					35°				
Color / Temperature	Red	Green	Blue	White	All	Red	Green	Blue	White	All	Red	Green	Blue	White	All
Lumen Output / Foot	155.3	230.9	39.0	277.0	734.7	144.2	248.0	37.2	271.8	735.3	153.8	227.6	39.3	247.6	621.8
Total Lumens	307.9	458.0	77.4	549.5	1457.2	285.9	491.8	73.7	539.1	1458.4	305.0	451.3	77.9	491.1	1233.3

LIGHT OUTPUT FOR 39.4 IN. / 1000 MM

LED Beam Angles	15°					25°					35°				
Color / Temperature	Red	Green	Blue	White	All	Red	Green	Blue	White	All	Red	Green	Blue	White	All
Lumen Output / Foot	155.3	230.9	39.0	277.0	734.7	144.2	248.0	37.2	271.8	735.3	153.8	227.6	39.3	247.6	621.8
Total Lumens	509.8	758.1	128.1	909.6	2412.3	473.3	814.2	122.1	892.4	2414.3	505.0	747.1	128.9	813.0	2041.7

LIGHT OUTPUT FOR 47 IN. / 1190 MM


LED Beam Angles	15°					25°					35°				
Color / Temperature	Red	Green	Blue	White	All	Red	Green	Blue	White	All	Red	Green	Blue	White	All
Lumen Output / Foot	155.3	230.9	39.0	277.0	734.7	144.2	248.0	37.2	271.8	735.3	153.8	227.6	39.3	247.6	621.8
Total Lumens	610.7	908.2	153.4	1089.7	2889.9	567.0	975.4	146.3	1069.1	2892.3	604.9	895.0	154.4	973.9	2445.8

Acolyte does not warrant or represent that the information is free from errors or omission. The information may change without notice and Acolyte is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.


DIMENSIONS / MOUNTING HARDWARE

DIMENSION DRAWINGS


12 in. / 305 mm:

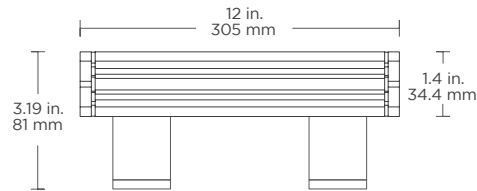


End view for all sizes:




19.7 in. / 500 mm:

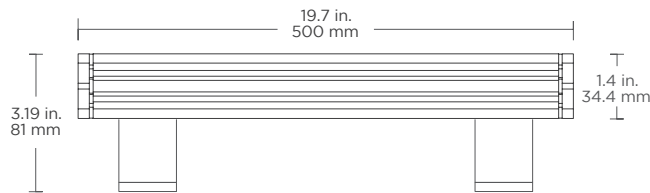


24 in. / 610 mm:

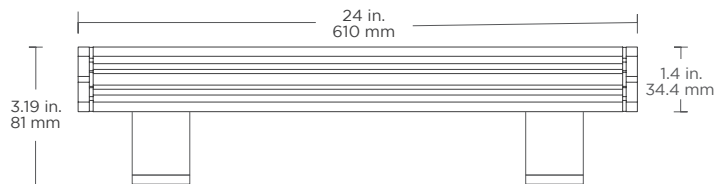

39.4 in. / 1000 mm:



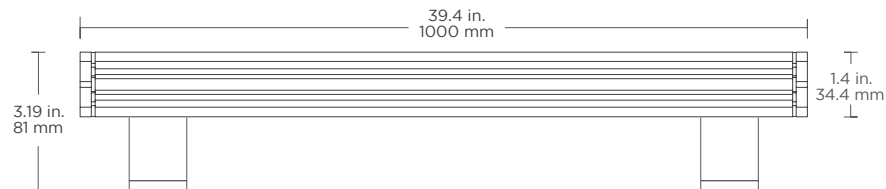


47 in. / 1190 mm:

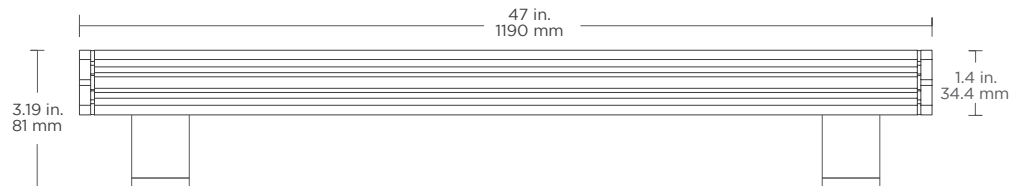

MOUNTING HARDWARE

Large Tilttable Stand
For adjustable mounting angles
up to 180°




MOUNTING HARDWARE / ACCESSORIES

MOUNTING HARDWARE



Mounting Arms

Small Mounting Arm Part Number: ARMORMNT0609
Large Mounting Arm Part Number: ARMORMNT1422

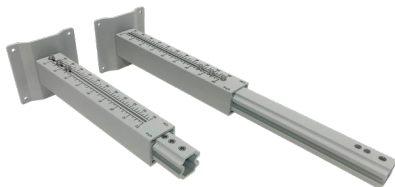

Armor Series Mounting Arm

Adjustable mounts (in 3 sizes) help set desired angle and distance from lighting surface

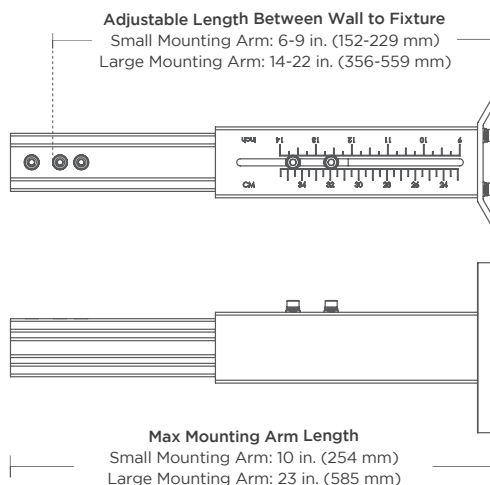

ACCESSORIES




Glare Shield

Part Number: MINISHLD

To reduce glare or redirect light


MINISHLD313 (313 mm)
MINISHLD500 (500 mm)
MINISHLD605 (605 mm)
MINISHLD1000 (1000 mm)
MINISHLD1190 (1190 mm)

12.2 in./310 mm (for 12 in./305 mm fixture),
19.57 in./497 mm (for 19.7 in./500 mm fixture),
23.7 in./602 mm (for 24 in./610 mm fixture),
39.25 in./997 mm (for 39.4 in./1000 mm fixture),
46.73 in./1187 mm (for 47 in./1190 mm fixture)

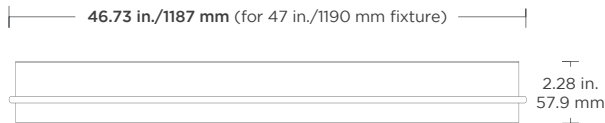

Adds 2.0 in. / 50.8 mm to the height of the fixture

FRONT VIEW



SIDE VIEW



2 Pin Female Cable To Bare Wire

Part Number: MINICBLFB

To bare wire for incoming power

MINICBLFB300 (300mm)
MINICBLFB500 (500mm)
MINICBLFB1000 (1000mm)
MINICBLFB2000 (2000mm)



2 Pin Male To Female Jumper Cable

Part Number: MINIJUMPMF

To connect 2 pin male connector to 2 pin female connector

MINIJUMPMF1000 (1000mm)
MINIJUMPMF2000 (2000mm)



3 Pin Female To Bare Wire DMX Input Cable

Part Number: MINIDMXFB

To bare wire for DMX controller

MINIDMXFB500 (500mm)



3 Pin Male To 3 Pin Female DMX Jumper Cable

Part Number: MINIDMXMF

To connect 3 pin male connector to 3 pin female connector for DMX data

MINIDMXMF1000 (1000mm)
MINIDMXMF2000 (2000mm)

CONNECTION / CONNECTORS

DMX:

