


### NEON CONTOUR

It's like neon, but better! This bendable, waterproof silicone fixture uses a rounded lens that gives modern LEDs the classic glow of neon tubes. Available in Static White, Variable White and color changing RGB, the Neon Contour is designed to brave the elements in façade lighting and lettering.

- Side-bending flexible silicone creates vivid tubes of light
- RGB, Static White, Variable White at 3.0 W/ft (9.8 W/m)
- All cut lengths at 1.97 in. (50 mm)
- Waterproof and UV resistant
- Unique rounded design helps create signature styles

#### Applications:

|               |               |                  |
|---------------|---------------|------------------|
| Commercial    | Hospitality   | Residential      |
| Entertainment | Museums       | Retail / Signage |
| Healthcare    | Public Spaces |                  |

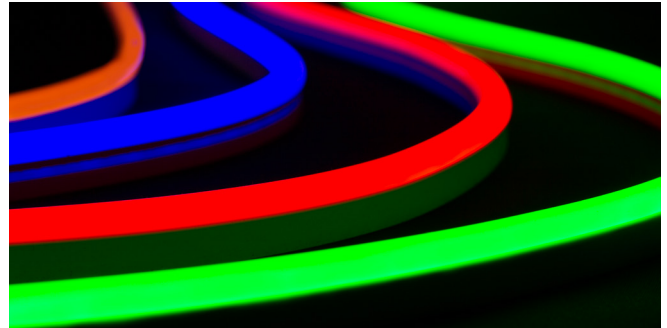

### ORDERING GUIDE

| Category           | Wattage & Color                                                                                                                                                                                                     | Power Feed Direction                                                                                                  |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| <b>NLC</b>         |                                                                                                                                                                                                                     |                                                                                                                       |
| NLC - Neon Contour | <b>3.024</b> - 3.0 W/ft (9.8 W/m) 2400K<br><b>3.027</b> - 3.0 W/ft (9.8 W/m) 2700K<br><b>3.030</b> - 3.0 W/ft (9.8 W/m) 3000K<br><b>3.035</b> - 3.0 W/ft (9.8 W/m) 3500K<br><b>3.040</b> - 3.0 W/ft (9.8 W/m) 4000K | <b>3.0RGB</b> - 3.0 W/ft (9.8 W/m) Red, Green, Blue<br><b>3.0VW</b> - 3.0 W/ft (9.8 W/m) Variable White (2400K-6000K) |
|                    |                                                                                                                                                                                                                     | <b>E</b> - End Feed<br><b>B</b> - Bottom Feed                                                                         |

#### Mounting

##### 1. Aluminum Mounting Clip

Recommended for curved applications with 6 in. (150 mm) on center spacing  
Part #: NLCMOUNTCLIPV2

##### 2. Neon Contour Mounting Channel

Recommended for all straight run applications  
Sold by the foot, up to 6 ft 6 in. / 2 m  
Part #: NLCCHV2

### AVAILABLE COLORS AND COLOR TEMPERATURES



POWER FEED OPTIONS / SPECIFICATIONS / USAGE GUIDELINES

| SPECIFICATIONS              | NEON CONTOUR                                                                                                   |
|-----------------------------|----------------------------------------------------------------------------------------------------------------|
| Operating Voltage           | 24V DC                                                                                                         |
| Power Consumption           | Static White, Variable White, RGB: 3.0 W/ft (9.8 W/m)                                                          |
| Protection Rating           | IP67                                                                                                           |
| Beam Angle                  | 110°                                                                                                           |
| Dimming                     | ELV / MLV / 0-10 Volt / DMX / Lutron Hi-Lume 1% dimming LED drivers                                            |
| Operating Temperature       | -4° F to 140° F (-20° C to 60° C)                                                                              |
| Color Temperatures / Colors | 2400K, 2700K, 3000K, 3500K, 4000K, Variable White (2400K-6000K), RGB                                           |
| Lamp Life                   | 50,000 Hours                                                                                                   |
| Max Length                  | Static White: 42 ft 7.81 in. (13 m)<br>Variable White, RGB: 16 ft 4.85 in. (5 m)                               |
| Cuttable Length             | Static White, Variable White, RGB: 1.97 in. (50 mm) Not Field Cuttable                                         |
| Power Cable Length          | Standard: 12 in. (304.8 mm) / Custom: up to 20 ft (6 m)                                                        |
| UV Resistant                | UV tested in accordance with ISO 4892-3 with no visible change on the appearance of the sample                 |
| Minimum Bend Diameter       | 7.87 in. (200 mm)                                                                                              |
| CRI (white)                 | 90+ for all Color Temperatures                                                                                 |
| Lumens                      | <b>3.0 Static White</b><br>4000K: 152 lm/ft (498.6 lm/m), 38 lm/W                                              |
|                             | <b>3.0 Variable White</b><br>150 lm/ft (492 lm/m), 34 lm/W                                                     |
|                             | <b>3.0 RGB</b>                                                                                                 |
|                             | Red: 11 lm/ft (36.1 lm/m), 11 lm/W<br>Green: 43 lm/ft (141 lm/m), 29 lm/W<br>Blue: 9 lm/ft (29.5 lm/m), 5 lm/W |
|                             | All LEDs at 100%: 63 lm/ft (206.6 lm/m), 21 lm/W                                                               |

MOLDED END CAPS



Molded End Cap





Molded Power Feed End Cap



USAGE GUIDELINES



- When installing this product take into account the surface temperature of the material where it will be mounted. Many building surfaces which are exposed to direct sunlight exceed the 140° F/60° C maximum that our product is rated for. High-risk locations like this should be avoided.
- This product is not intended to be submerged in pools and fountains and does not carry UL 676 certification to do so. Available for download at: [www.GENLEDBrands.com/Acolyte](http://www.GENLEDBrands.com/Acolyte)
- Compatible with a wide variety of control products including the entire line of Lutron dimming systems.
- For use with Acolyte drivers, triac dimming modules, and 0-10 modules.
- Use with non-Acolyte triac, MLV or ELV drivers is not supported or warranted
- Due to the cuttable points inside, this product's cuttable lengths are generally longer or shorter than the customer requested length. Unless specified, this product is factory cut at the shorter cuttable point
- This product can be used in wet, outdoor locations around swimming pools and spa tubs, but not submerged in swimming pools and spa tubs.
- We reserve the right to make changes to product lineup, specifications, design and finishes at any time without notice.

Acolyte does not warrant or represent that the information is free from errors or omission. The information may change without notice and Acolyte is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.


**DIMENSIONS & DIAGRAMS - STATIC WHITE & VARIABLE WHITE MODELS WITH MOLDED END CAPS**
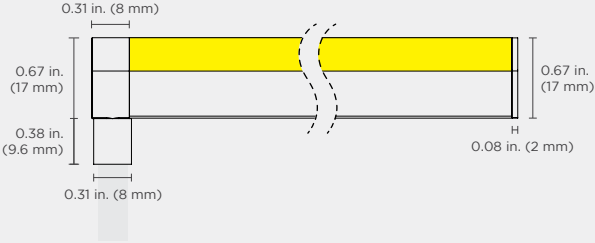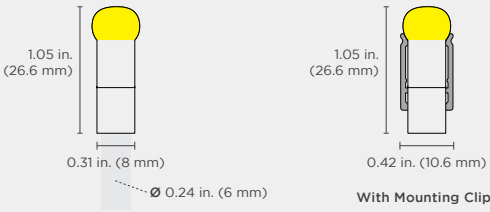
| WITH BOTTOM FEED MOLDED END CAP                                                                                                                                                               |                                                                                                                                                                                                                                                                                                                             |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Side View                                                                                                                                                                                     | End View                                                                                                                                                                                                                                                                                                                    |
|  <p><b>Max Lengths:</b><br/>Static White: 42 ft 7.81 in. (13 m)<br/>Variable White: 16 ft 4.85 in. (5 m)</p> |  <p><b>Bottom Width:</b> 0.31 in. (8 mm)<br/><b>Height:</b> 1.05 in. (26.6 mm)<br/><b>Cable Diameter:</b> 0.24 in. (6 mm)</p> <p><b>With Mounting Clip</b><br/><b>Width:</b> 0.42 in. (10.6 mm)<br/><b>Height:</b> 1.05 in. (26.6 mm)</p> |




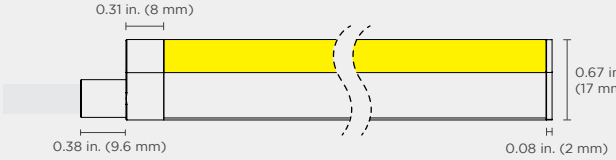
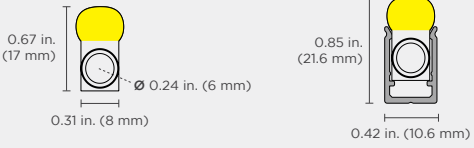
| WITH END FEED MOLDED END CAP                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                                            |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Side View                                                                                                                                                                                      | End View                                                                                                                                                                                                                                                                                                                   |
|  <p><b>Max Lengths:</b><br/>Static White: 42 ft 7.81 in. (13 m)<br/>Variable White: 16 ft 4.85 in. (5 m)</p> |  <p><b>Bottom Width:</b> 0.31 in. (8 mm)<br/><b>Height:</b> 0.67 in. (17 mm)<br/><b>Cable Diameter:</b> 0.24 in. (6 mm)</p> <p><b>With Mounting Clip</b><br/><b>Width:</b> 0.42 in. (10.6 mm)<br/><b>Height:</b> 0.85 in. (21.6 mm)</p> |

| MOUNTING CLIP                                                                                                                                                  |                                                                                                                                                                     |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Recommended for curved applications with 6 in. (150 mm) on center spacing.                                                                                     |                                                                                                                                                                     |
| Top View                                                                                                                                                       | End View                                                                                                                                                            |
|  <p><b>Width:</b> 0.42 in. (10.6 mm)<br/><b>Depth:</b> 0.79 in. (20 mm)</p> |  <p><b>Width:</b> 0.42 in. (10.6 mm)<br/><b>Height:</b> 0.61 in. (15.5 mm)</p> |

| MOUNTING CHANNEL                                                                                                                                       |  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Recommended for all straight run applications.<br>Sold by the foot, up to 6 ft 6 in. / 2 m (same width & height as mounting clip)<br>(Part #: NLCCHV2) |  |

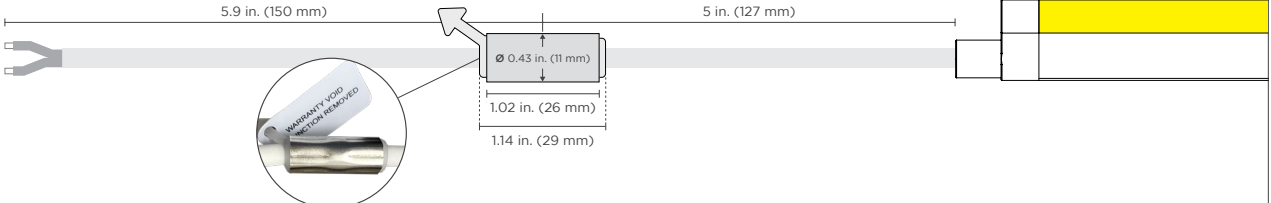
| HYDRO SEAL                                                                                                                                              |  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| The Hydro Seal clinches tightly around the conductors to prevent any water flow from the end of the wire to the circuit board through capillary effect. |  |
|                                                                     |  |

**DIMENSIONS & DIAGRAMS - RGB MODELS WITH SILICONE END CAPS**

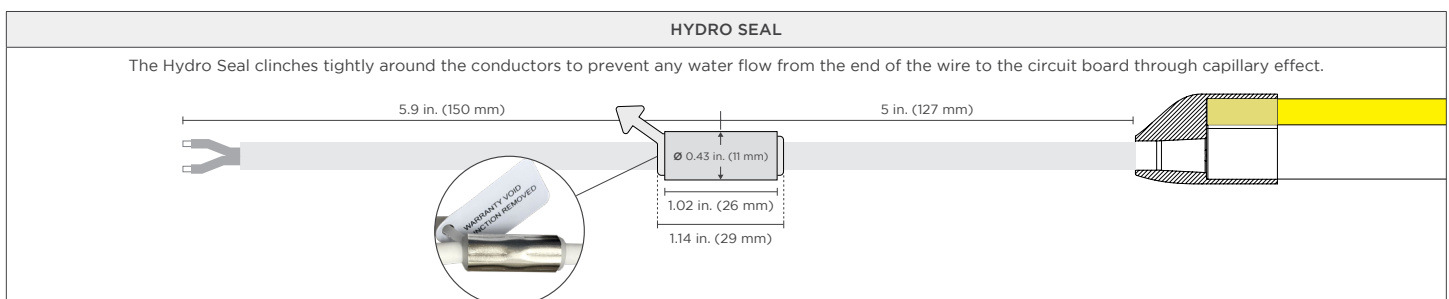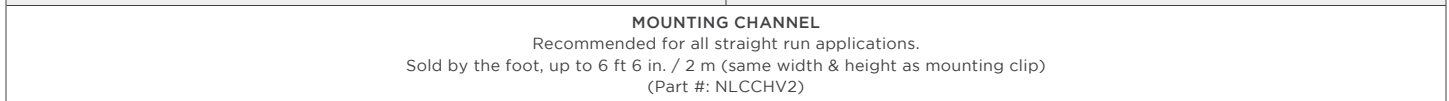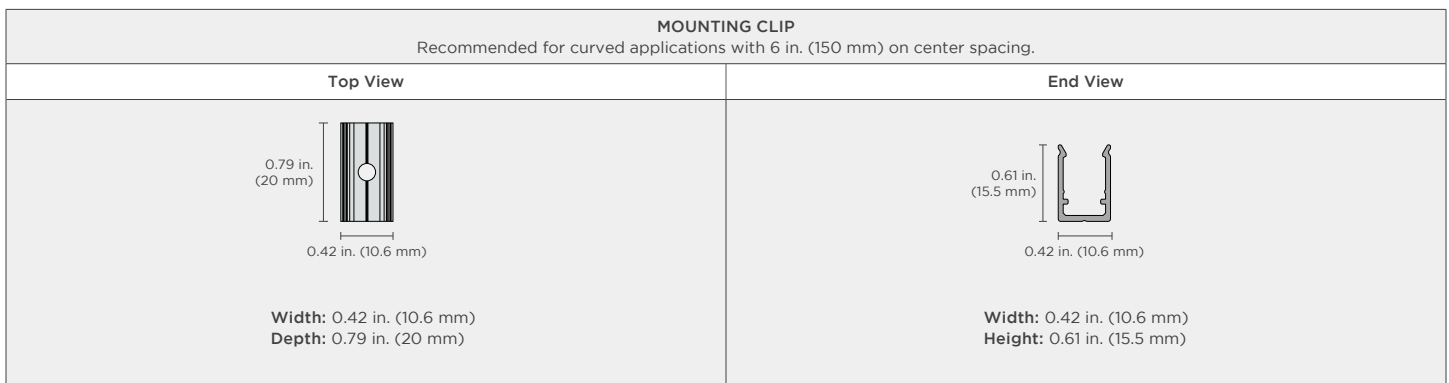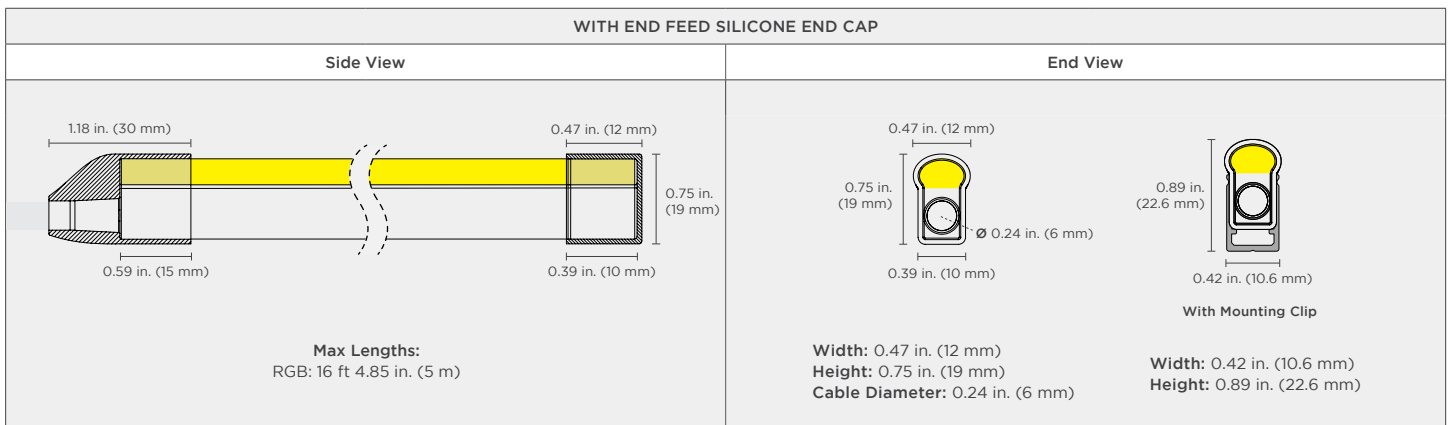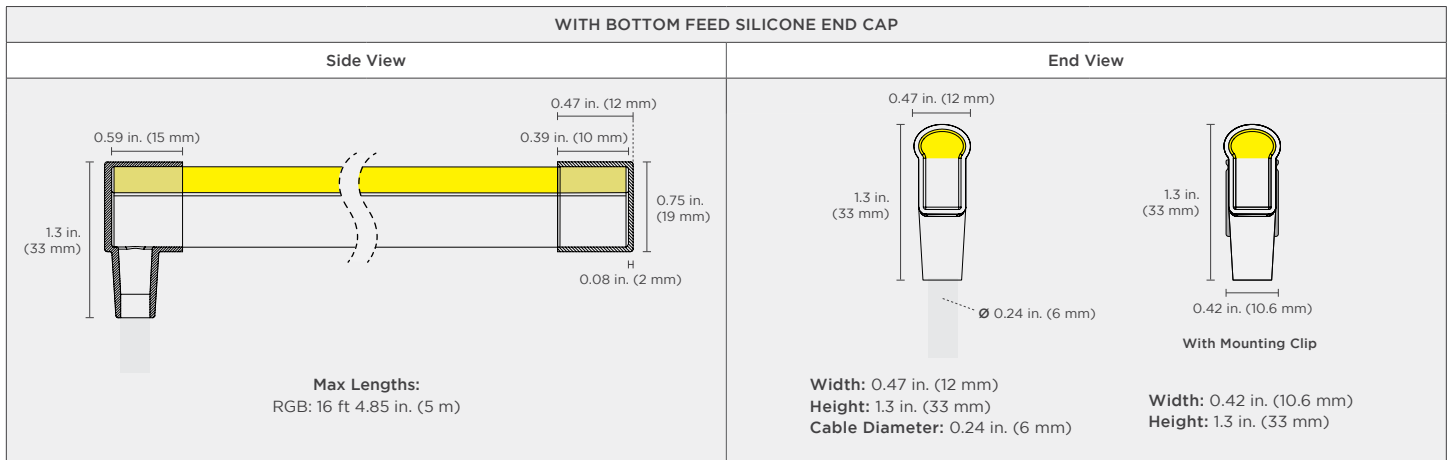


WIRING DIAGRAMS


0-10V

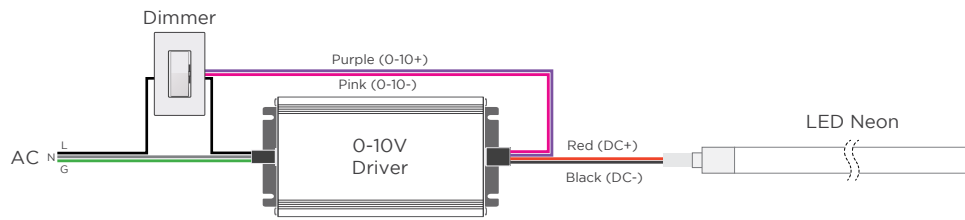


MLV / ELV

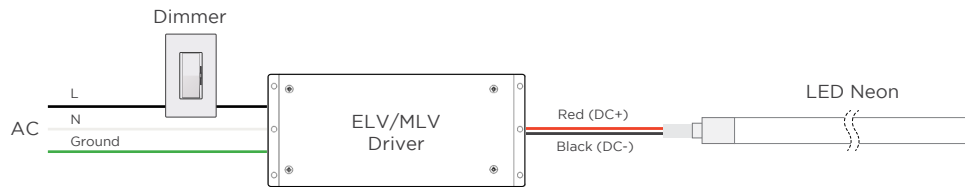


DMX

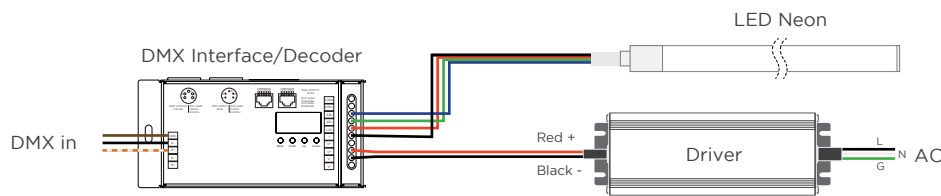

2-CHANNEL VARIABLE WHITE DIMMING

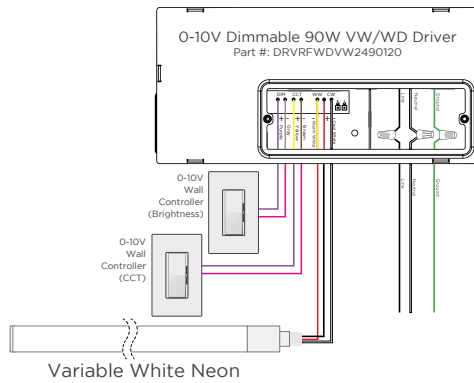

DMX WIRING DIAGRAM - COMPATIBLE WITH ALL MODELS OF VARIABLE WHITE RIBBONLYTE

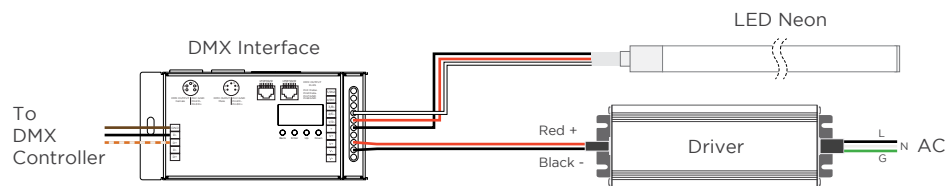

WIRE COLORS PER RIBBONLYTE COLOR

**STATIC WHITE**  
Red Wire (+) Positive  
Black Wire (-) Negative

**RGB**  
Black Wire (+) Positive  
Red Wire (-) goes to Red Channel  
Green Wire (-) goes to Green Channel  
Blue Wire (-) goes to Blue Channel

**VARIABLE WHITE**  
Black Wire (+) Positive  
Red Wire (-) goes to Warm White Channel  
White Wire (-) goes to Cool White Channel