



STATIC WHITE FLEXRAYZ NEON

FlexRayz Neon from AgiLight offers a versatile approach to border tube that eliminates light gaps. A side-bending LED neon that provides an excellent solution for linear façade lighting in curved or straight runs, Static White FlexRayz uses a constant current design to provide consistent brightness throughout each run. Rated IP67 for use in damp and wet locations. FlexRayz products are designed to bend; use Aluminum Mounting Channel for straight run applications.

Applications:

- Borders and edges in signs and facades
- Neon replacements
- Cove and Accent lighting

Features:

- Available in pre-assembled 2 ft (0.61 m) or 8 ft (2.44 m) lengths or sold in full reels of 49 ft (15 m)
- Full reels can be cut and finished with an end cap; new power feeds cannot be introduced in the field
- 3 W/ft (9.84 W/m), 24 V DC
- 6500K (4000K, 5000K upon request)
- 2 in. (50 mm) cut lengths



RoHS

LM-80

IP67

- 110x250° beam angle
- Use Aluminum Mounting Channel for straight runs
- Use S-type Track or Aluminum Mounting Clips for curves
- Saltwater, solvent, and flame resistant
- IP67; IK08 impact protection
- Consistent brightness with constant current design
- Minimum bend diameter of 2 in. (50 mm)

ORDERING GUIDE


Part Number	Length	Color Temperature	Lumens / Foot	Lumens / Meter
LB-FRN-65K-2-A	2 ft / 0.61 m	6500K	170 lm/ft	557.6 lm/m
LB-FRN-65K-8-A	8 ft / 2.44 m	6500K	170 lm/ft	557.6 lm/m
LB-FRN-65K-49-A	49 ft / 15 m	6500K	170 lm/ft	557.6 lm/m
LB-FRN-50K-2-A*	2 ft / 0.61 m	5000K	210 lm/ft	688.8 lm/m
LB-FRN-50K-8-A*	8 ft / 2.44 m	5000K	210 lm/ft	688.8 lm/m
LB-FRN-50K-49-A*	49 ft / 15 m	5000K	210 lm/ft	688.8 lm/m
LB-FRN-40K-2-A*	2 ft / 0.61 m	4000K	65 lm/ft	541.2 lm/m
LB-FRN-40K-8-A*	8 ft / 2.44 m	4000K	65 lm/ft	541.2 lm/m
LB-FRN-40K-49-A*	49 ft / 15 m	4000K	65 lm/ft	541.2 lm/m

* Special order only

SPECIFICATIONS

Input Voltage	24 V DC
Power Consumption	3 W/ft (9.84 W/m)
CRI	80
Cutttable Length	2 in. (50 mm)
Max. Length	49 ft (15 m)
Available Lengths	2 ft (0.61 m) 8 ft (2.44 m) 49 ft (15 m)
Min. Bending Diameter	2 in. (50 mm)
Ingress Protection	IP67
Impact Protection Rating	IK08
L70 Lifetime @ 60° C	50,000 Hours
Warranty	5 Year Limited Warranty

LUMINOUS INTENSITY DISTRIBUTION




Average Beam Angle (50%): 131.2°

Unit: cd

— C0/180, 148.4°

— C90/270, 114.1°

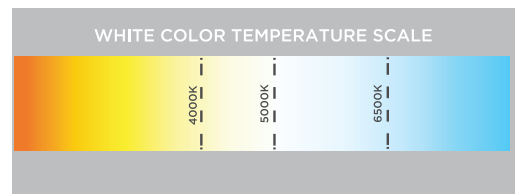


REV.13SEP2023




DIMENSIONS

	FlexRayz Neon	Front Bottom Feed End Cap	Closing End Cap (part #: LB-FRN-CAP)
Length	2 ft (0.61 m), 8 ft (2.44 m), and 49 ft (15 m)	0.94 in. (24 mm)	0.94 in. (24 mm)
Width	0.55 in. (14 mm)	0.55 in. (14 mm)	0.55 in. (14 mm)
Height	1.06 in. (27 mm)	1.54 in. (39 mm)	1.06 in. (27 mm)

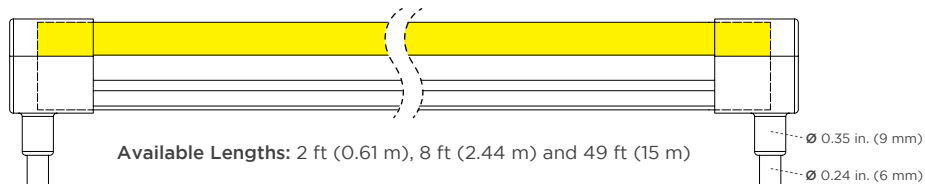


Static White FlexRayz Neon if cut							
Standard Length (ft)	Actual Light Length		Actual Length with End Caps		Channel Cut Length		
	(ft)	(m)	(ft)	(m)	(ft)	(m)	
Single End Feed							
2	1.97	0.6	2.05	0.63	1.82	0.55	
8	7.87	2.4	7.96	2.42	7.72	2.35	
49	48.88	14.9	48.97	14.92	48.73	14.85	
Double End Feed							
2	1.97	0.6	2.13	0.65	1.82	0.55	
8	7.87	2.4	8.04	2.45	7.72	2.35	
49	48.88	14.9	49.05	14.95	48.73	14.85	

Minimum Bending Diameter



Bending Direction



ACCESSORIES

	Closing End Cap	Aluminum Mounting Clip for mounting in curved sections only	S-type Track for mounting in curved sections	Aluminum Channel for mounting in straight sections	0.5 in. Standoff for mounting above facade surface	Silicone Glue
Part No.	LB-FRN-CAP	LB-FRN-CLIPMNT	LB-FRN-CRVMNT	LB-FRN-CHMNT	LB-FRN-STDOFF	LB-FRN-SILGLUE
Length	0.63 in. (16 mm)	0.98 in. (25 mm)	19.7 in. (500 mm)	39.4 in. (1000 mm)	0.38 in. (9.5 mm)	--
Width	0.67 in. (17 mm)	0.48 in. (12.3 mm)	0.43 in. (11 mm)	0.48 in. (12.3 mm)	0.38 in. (9.5 mm)	--
Height	1.24 in. (31.5 mm)	0.67 in. (17 mm)	0.67 in. (17 mm)	0.67 in. (17 mm)	0.5 in. (12.7 mm)	--