



Date \_\_\_\_\_ Project \_\_\_\_\_

Notes \_\_\_\_\_

**PERCEPTION PLUS PENDANT FIXTURE**

Perception Plus Pendants from Acolyte offer customizable pendants available in five nominal lengths\* from 2 ft (613 mm) to 8 ft. (2413 mm). Choose direct or direct/indirect lighting and mix and match different optic lenses to create the perfect beam of light for your application! Pick from milky lens, 60° louver or Batwing. The flexible Perception Pendant Series also allows us to create complementary sconces. Available in six CCTs ranging from 2700K to 6500K.

- Pendant or wall-mounted fixtures
- 5 Nominal Length options\*: from 2 ft. (613 mm) to 8 ft. (2413 mm)
- Direct/Indirect lighting
- 6 CCTs: 2700K, 3000K, 3500K, 4000K, 5000K, 6500K
- Lumen output up to 560 lm/ft (1840 lm/m)
- Use with remote drivers
- Available in silver, black, and white finishes

**HOUSING FINISHES**




Silver      Black      White

Default finish

Note: Custom colors available upon request

**COLOR TEMPERATURES**



2700K   3000K   3500K   4000K   5000K   6500K

**MOUNTING OPTIONS**



Wall Mount

Suspended Mount

**OPTIC OPTIONS**



Milky Lens

60° Louver

Batwing



100°



60°



100°

Indirect Lighting Only

**ORDERING GUIDE**

Model	Mounting Type	Length*		Color Temperature Direct		Color Temperature Indirect	
PPN							
PPN - Perception Plus	P - Suspended Pendant	2 - 2 ft (613 mm)	6 - 6 ft (1813 mm)**	27 - 2700K	40 - 4000K	27 - 2700K	40 - 4000K
		4 - 4 ft (1213 mm)	8 - 8 ft (2413 mm)	30 - 3000K	50 - 5000K	30 - 3000K	50 - 5000K
	W - Wall Mount	5 - 5 ft (1513 mm)		35 - 3500K***	65 - 6500K	35 - 3500K***	65 - 6500K

**Optics Direct**

M - Milky      60 - 60° Louver


**Optics Indirect**

M - Milky      60 - 60° Louver  
BW - Batwing


**Surface Finish**

SV - Silver      WH - White  
BK - Black      C - Custom RAL

\* See exact fixture lengths on page 3  
\*\* Not available with 60° Louver  
\*\*\* May have longer lead time and MOQ

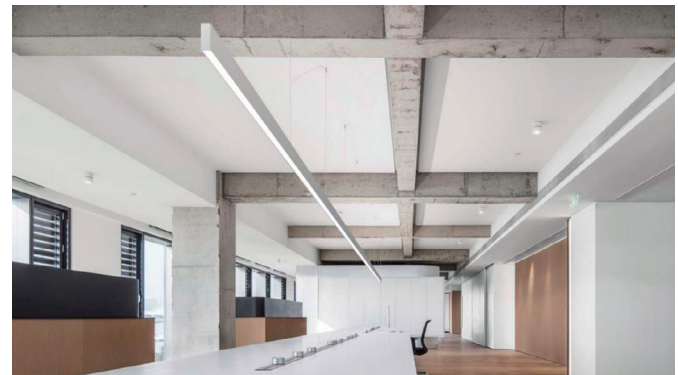

Suspended Mount

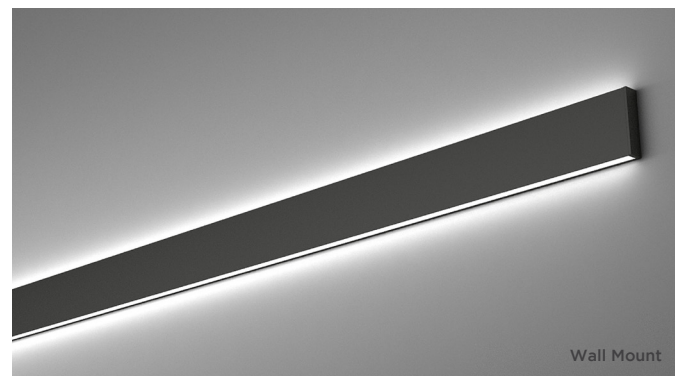

Wall Mount







**SPECIFICATIONS**

<b>Beam Angle</b>	110° with Milky Lens Direct Lighting, 100° with Milky Lens Indirect Lighting, 60° with 60° Louver Direct/Indirect Lighting, 100° with Batwing Indirect Lighting Only
<b>Lens Types</b>	Milky Lens (PMMA), 60° Louver, Batwing
<b>Nominal Length</b> (see exact lengths on page 3)	2 ft. (613 mm), 4 ft. (1213 mm), 5 ft. (1513 mm), 6 ft. (1813 mm)*, 8 ft. (2413 mm)
<b>Operating Voltage</b>	24V DC (remote driver with 100-277 VAC Input)
<b>Dimming</b>	0-10V, DALI
<b>Available Colors</b>	2700K, 3000K, 3500K, 4000K, 5000K, 6500K
<b>Efficacy</b>	92 lm/W with milky lens
<b>Light Output</b>	560 lm/ft (1840 lm/m)
<b>CRI</b>	80+ Standard, 90+ Optional
<b>Certifications</b>	UL, CE, RoHS

\* Not available with 60° Louver

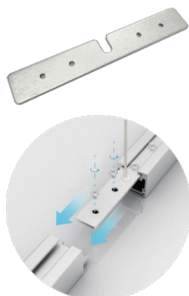**ACCESSORIES**
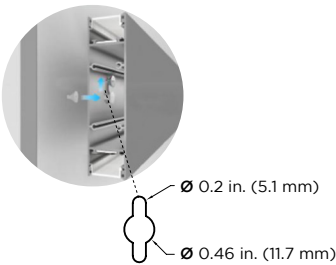
<p><b>180° Coupler</b> (Part #: PN180CONNPS)</p> 	<p><b>Suspended Mounting Kit</b> (included accessory)</p> 	<p><b>Canopy Kit</b> (included accessory)</p> <p>Canopy color matches fixture finish</p> 	<p><b>Keyhole Slot for Wall Mount</b> No accessory needed. See installation guide for details</p> <p>Keyholes every 21.65 in. (550 mm)</p>  <p>Ø 0.2 in. (5.1 mm) Ø 0.46 in. (11.7 mm)</p>
---	---	---	---

**DIMENSIONS**

<p><b>Suspended Mount</b></p>  <p>3.94 in. (100 mm)</p> <p>0.98 in. (25 mm)</p>	<p><b>Wall Mount</b></p>  <p>3.94 in. (100 mm)</p> <p>0.98 in. (25 mm)</p>
--	---

Acolyte does not warrant or represent that the information is free from errors or omission. The information may change without notice and Acolyte is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

**EXACT FIXTURE LENGTHS**

Nominal Length	Exact Fixture Length with Batwing or Milky Lens				Exact Fixture Length with 60° Louver			
	mm	in.	ft	Wattage	mm	in.	ft	Wattage
2	609	23.9	1.99	24 W	543	21.3	1.78	21.6 W
4	1209	47.5	3.96	48 W	1083	42.6	3.55	43.2 W
5	1509	59.3	4.94	60 W	1515	59.5	4.96	60.6 W
6	1809	71.1	5.92	72 W	N/A	N/A	N/A	N/A
8	2409	94.7	7.89	96 W	2161	84.9	7.08	86.4 W

**LUMEN**

Optic	Light Output (lm/ft)	Light Output (lm/m)	Efficacy (lm/W)	Beam Angle
Milky Lens Direct Lighting	560	1836	92	110
Square Milky Lens Indirect Lighting	489	1603	81	100
60° Louver Direct Lighting	483	1583	79	60
60° Louver Indirect Lighting	356	1167	58	60
Batwing Indirect Lighting	707	2320	116	100