

ULTRA 650 RGBW COLOR CHANGING LED SIGNAGE MODULES

CHANNEL LETTERS | COVE LIGHTING | BOX SIGNS | APPLICATIONS STARTING AT DEPTHS OF 3 IN. (75 MM)

ULTRA 650 RGBW modules are premium color changing signage modules engineered for constant current so there is no lumen drop across the full length of any string. The ULTRA 650 RGBW module features four chips in each LED - red, green, blue and white for added brightness. Use DMX controls to tune ULTRA 650 RGBW modules to any color.



12V DC


CAPZUL® WATERPROOF

CC


CONSTANT CURRENT

PRODUCT RATINGS

Luminous Efficacy	52.2 lm/W (All) 25.3 lm/W (Red) 61.7 lm/W (Green) 20 lm/W (Blue) 101.7 lm/W (White)	Input Current	100 mA (All) 25 mA (Red) 25 mA (Green) 25 mA (Blue) 25 mA (White)
	1.20 W/module (All) 0.30 W/module (Red)	Power Supply Loading	46 modules per 60 W
Martin and a state of the		Ingress Protection	IP66
Wattage per Module	0.30 W/module (Green) 0.30 W/module (Blue)	Operating Temperature	-13° - +131°F (-25° - +55°C)
	0.30 W/module (White)	L70 Lifetime @ 60° C	50,000 hours
Input Voltage	12 V DC	Warranty	5 Year Standard Warranty

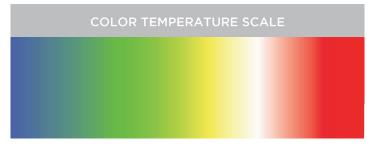

LUMINOUS INTENSITY DISTRIBUTION **Batwing Beam Pattern**



MODULE DIMENSIONS

