

NEON360

Static White | Variable White | RGBW | Pixel



Neon360 is a 24V bendable LED neon tube with a smooth round profile that provides uniform light distribution across its full 360° face! There are several installation options for this unique pliable IP67 tube. It can hang directly from the ceiling. It can be used with mounting clips or a straight mounting channel along any surface. Hang it in a rigid tube at any angle. Loop it or turn it and shape it with suspended rings. Choose from Static White, Variable White, color changing RGBW and Pixel programmable RGBW options. Neon360 marries the classic gleam of neon with all the benefits of modern LEDs!

COMMON FEATURES

- Fully illuminated flexible round LED neon
- Diode-free
- 0.98 in. (25 mm) diameter
- 16 ft 4.85 in. (5 m) max length (single feed)
- 32 ft 9.7 in. (10 m) max length (double feed)
- IP67

STATIC WHITE

- 2700K, 3000K, 4000K, 5000K, 6000K
- Min. bending radius: 1.97 in. (50 mm)
- 4.3 W/ft (14 W/m)
- 305 lm/ft (1000 lm/m) at 4000K

VARIABLE WHITE

- Tune from 2700K-6000K
- Min. bending radius: 3.15 in. (80 mm)
- 5.5 W/ft (18 W/m)
- 381 lm/ft (1250 lm/m) all on


RGBW

- RGBW (2700K, 3000K, 4000K, 5000K, 6000K)
- Min. bending radius: 3.15 in. (80 mm)
- 5.5 W/ft (18 W/m)
- 192 lm/ft (630 lm/m) all on

PIXEL

- Pixel programmable RGBW (2700K, 3000K, 4000K, 5000K, 6000K)
- Min. bending radius: 3.15 in. (80 mm)
- 5.5 W/ft (18 W/m)
- 171 lm/ft (560 lm/m) all on

ACCESSORIES

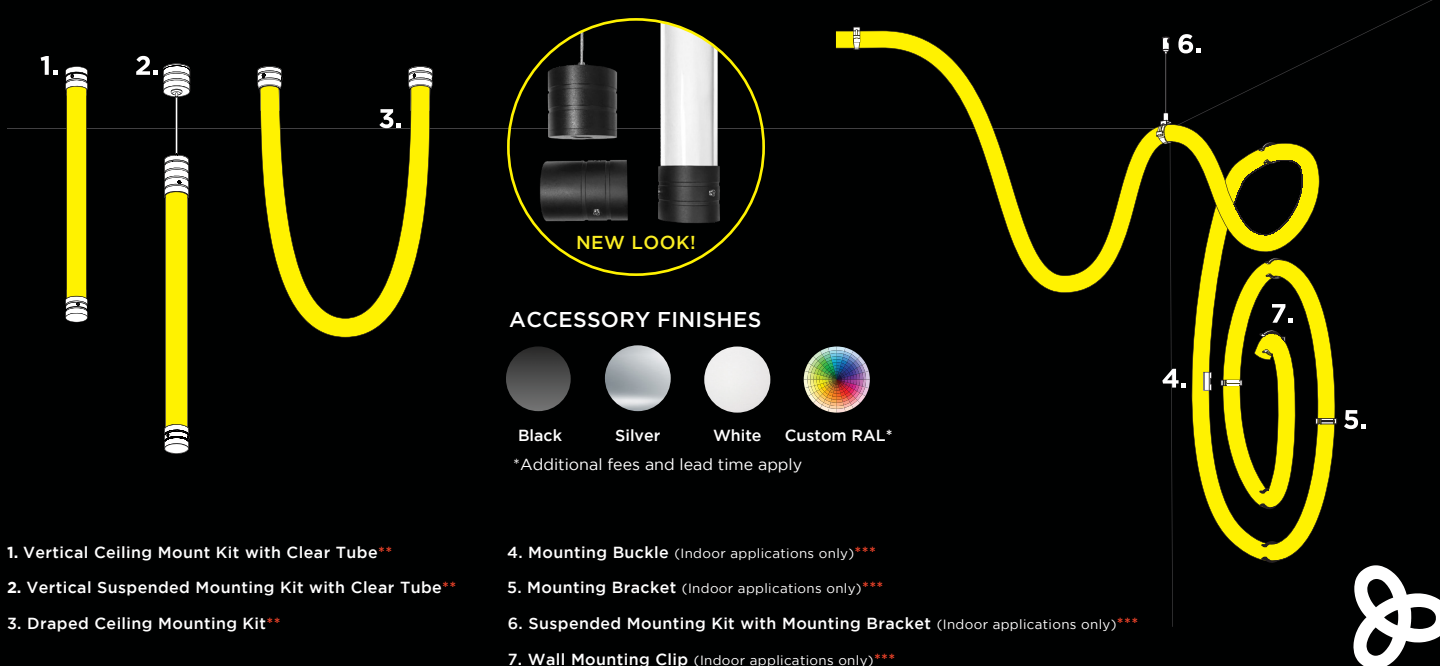

** Not available with side power feed options

*** These mounting options will not create perfectly straight horizontal runs