

# 12V ULTRA Lyte

**BEST IN CLASS BRIGHTNESS & EFFICACY | CONSTANT CURRENT**

**CONTINUOUS RELEASE LINER**  
REDUCES INSTALLATION TIME BY 30%

Great for channel letters, box signs or cove and accent lighting, ULTRA Lyte modules feature a 12V true IC constant current design that maintains brilliant light across each string. With an IP67 rating and a seven-year warranty, ULTRA Lyte modules allow speedy installation with a convenient continuous release liner for the mounting tape. ULTRA Lyte static white modules offer three module designs (ULTRA Lyte 1, ULTRA Lyte 2, ULTRA Lyte 3) engineered with unique spacing available in three CCTs (5000K, 6500K, 7100K). ULTRA Lyte 2 Color modules are available in three static colors.



12V DC



**IP67**



7 YEAR LIMITED WARRANTY

## FEATURES

| Module             | Module Spacing     | Number of Modules           | Wattage per Module | Nominal Light Output   | Input Current  |
|--------------------|--------------------|-----------------------------|--------------------|--|----------------|
| ULTRA Lyte 1       | 4.92 in.<br>125 mm | 2.44 per ft<br>(8 per m)    | 0.36/W Nominal     | 61 lm/module   | 0.030 A/Module |
| ULTRA Lyte 2       | 7.09 in.<br>180 mm | 1.69 per ft<br>(5.56 per m) | 0.72/W Nominal     | 122 lm/module  | 0.060 A/Module |
| ULTRA Lyte 2 Color | 7.09 in.<br>180 mm | 1.69 per ft<br>(5.56 per m) | 0.71/W Nominal     | Red: 25 lm/module<br>Blue: 13 lm/module<br>Green: 54 lm/module | 0.059 A/Module |
| ULTRA Lyte 3       | 9.84 in.<br>250 mm | 1.22 per ft<br>(4 per m)    | 1.08/W Nominal     | 184 lm/module  | 0.090 A/Module |





ONEWhite<sup>®</sup>  
COLOR CONSISTENCY





VERSALENZ<sup>®</sup>  
ADVANCED OPTICS



## DIMENSION DRAWINGS ULTRA Lyte 1

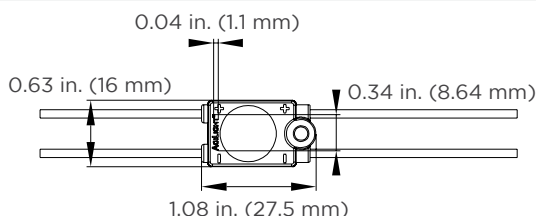

## ULTRA Lyte 2 & ULTRA Lyte 2 Color

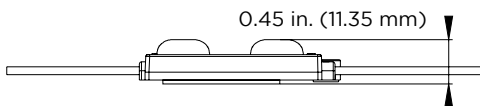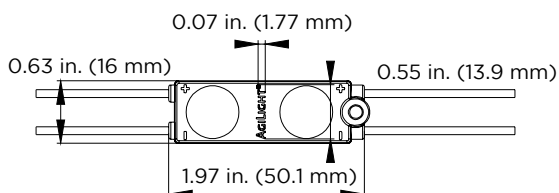

## ULTRA Lyte 3

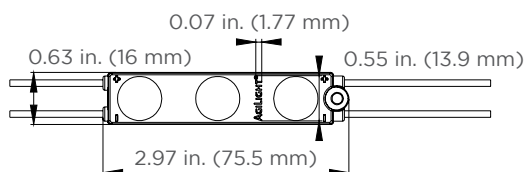

CAPZUL<sup>®</sup>  
WATERPROOF



CONSTANT CURRENT



UV RESISTANT



50,000 HRS  
L70 LIFETIME