
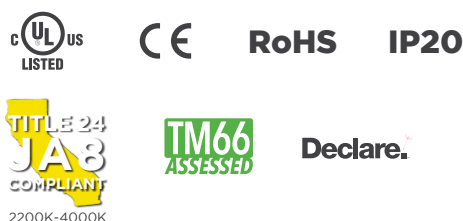


3.0 STATIC WHITE XACTA RIBBONLYTE

Xacta RibbonLyte is the most precise RibbonLyte we've ever created. Xacta RibbonLyte lets you cut between any LED to create custom fixtures of any exact length. Available in nine brilliant CCTs (1800K-6000K), dimmable Static White Xacta RibbonLyte offers 92+ CRI and cuttable lengths in increments of just 0.2 in. (5 mm). Design custom Xacta RibbonLyte fixtures with Acolyte channel fixtures.

- Cuttable every 0.2 in. (5 mm)
- 3.0 W/ft (9.8 W/m)
- 9 white color temperatures
- 115.6 lm/W
- 349.7 lm/ft (1147.4 lm/m) @ 3500K
- 92+ CRI
- Closet rated in channel applications

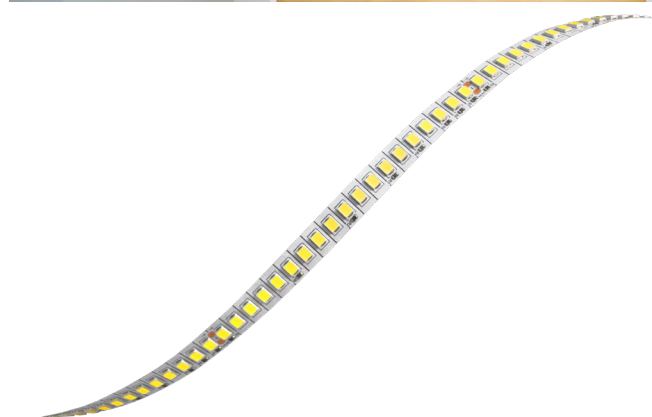

ORDERING GUIDE

Category	CRI	Ribbon Type & IP Rating	Wattage & Color Temperature	
RB	90	XACTA20		
RB - RIBBONLYTE	90 - 90+ CRI Static White	XACTA20 - Xacta RibbonLyte IP20	3.018 - 3.0 W/ft (9.8 W/m) 1800K	3.030 - 3.0 W/ft (9.8 W/m) 3000K
			3.020 - 3.0 W/ft (9.8 W/m) 2000K	3.035 - 3.0 W/ft (9.8 W/m) 3500K
			3.022 - 3.0 W/ft (9.8 W/m) 2200K	3.040 - 3.0 W/ft (9.8 W/m) 4000K
			3.024 - 3.0 W/ft (9.8 W/m) 2400K	3.060 - 3.0 W/ft (9.8 W/m) 6000K
			3.027 - 3.0 W/ft (9.8 W/m) 2700K	

CONNECTION OPTIONS

1. End Feed Bare Wire Connection (Default Option)



2. IP67 Connector Input



3. Soldered Daisy Chain



4. Daisy Chain with IP67 Connectors



5. Bare Wire on Both Ends




Standard cable length if not specified:

1. 12 in. cable with bare wire (custom length up to 20 feet)
2. Standard 12 in. cable with IP67 connectors (custom length up to 10 feet)
3. Daisy chain with 3 in. cable between runs (custom length up to 36 in.)



4. 3 in. cable between IP67 connector and RibbonLyte (custom length up to 18 in.)
 5. Standard 12 in. cable with bare wire (custom length up to 10 feet)
- Note: IP67 connectors are used for both IP20 and IP65/IP68 RibbonLyte

AVAILABLE COLOR TEMPERATURES





SPECIFICATIONS / DIAGRAM / USAGE GUIDELINES

3.0 STATIC WHITE XACTA RIBBONLYTE	
Operating Voltage	24 V
Power Consumption	3.0 W/ft (9.8 W/m)
Current (mA) - 24V	126.1 mA/ft (413.7 mA/m)
LED Pitch	61 LEDs/ft (200 LEDs/m)
Protection Rating	IP20
Dimming/Control	MLV / 0-10 Volt / ELV / DALI
Operating Temperature	-40 — 158 °F (-40 — 70 °C)
Colors Temperatures	1800K, 2000K, 2200K, 2400K, 2700K, 3000K, 3500K, 4000K, 6000K
Lumens	349.7 lm/ft (1147.4 lm/m) @ 3500K
LED Beam Angle	120°
Lifetime (L70 reported)	50,000 hours
Cutable Length	0.2 in (5 mm)
CRI - All Color Temp.	92+ CRI
Lumens/Watt	115.6 lm/W @ 3500K
Constant Voltage	✓
Certifications	<p>UL 2108 Issued: 2016/06/17 Ed: 1 Rev: 2021/10/16 Low Voltage Lighting Systems. CSA C22.2 No. 250.0, General Requirements for Luminaires. RoHS compliant.</p> <p>All RibbonLyte models 3.0 W/ft (9.8 W/m) and lower when used in any Acolyte Channel profile except Piccolo are tested by UL and confirmed 'Suitable for Installation in the Storage Area of a Clothes Closet' in accordance with NFPA 70 and NEC 410.16 and 411.</p>
Warranty	Suitable for use in closets, compliant with NFPA® 70, NEC® Section 410.16 (A)(3) and 410.16 (C)(5). IP20: 6 years

24V DIMENSIONS	Top View	Side View	Dimensions
IP20	 <p>CUTTABLE EVERY: 0.2 in (5 mm)</p>		<p>Width 0.31 in (8 mm) Max Length 23.62 ft (7.2 m) Height 0.06 in (1.45 mm)</p>

OPTIONAL ACCESSORY

Flat Mounting Clip	0.5 in. VHB Tape*
 <p>Part Number: RBMNTSIL</p>	 <p>Provides superior holding power in surface mounted applications Part Number: VHBTAPE0.5BK</p>

* RibbonLyte comes with an adhesive backing, but Acolyte recommends using VHB Tape for extra support in surface mounted applications.

USAGE GUIDELINES

- When installing this product, consider the surface temperature of the material where it will be mounted. Many building surfaces which are exposed to direct sunlight exceed the 70 °C / 158 °F maximum for which our product is rated. High-risk locations like this should be avoided.
- IP20 RibbonLyte products are for indoor use in dry areas.
- Please refer to the RibbonLyte Proper Usage Guide in our Application Guide for more information. Available for download at AcolyteLED.com.
- This product is compatible with a wide variety of control products including the entire line of Lutron dimming systems.
- For use with Acolyte drivers, 0-10V dimming modules and interface controllers (DMXINF models).
- Use with non-Acolyte supplied drivers is not supported or warrantied.
- Due to the nature of RibbonLyte products, cuttable lengths are generally longer or shorter than the customer requested length. Unless specified, RibbonLyte is factory cut at the shorter cuttable point.
- We reserve the right to make changes to product lineup, specifications, design and finishes at any time without notice.


Acolyte does not warrant or represent that the information is free from errors or omission. The information may change without notice and Acolyte is not in any way liable for the accuracy of any information printed and stored or in any way interpreted or used.

CHANNEL COMPATIBILITY / CHANNEL OPTIONS


CHANNEL	IP20	SURFACE CHANNELS					
AC1	✓						
AC2	✓						
AC3	✓						
AC4	✓						
AC5	✓						
AR1	✓						
AR3	✓						
AS1	✓						
AS2	✓						
AS3	✓						
AS6	✓						
AS11	✓						
AS16	✓						
AS18	✓						
AS20G	✓						
AS22	✓						
AS30	✓						
AT4	✓						
AT5	✓						
B1	✓						
SC3	✓						
WH35	✓						
		CORNER CHANNELS					
AC1							
AC2							
AC3							
AC4							
AC5							
		RECESSED CHANNELS					
AR1							
AR3							
		MUD-IN CHANNELS					
SC3							

WIRING DIAGRAMS


0-10V

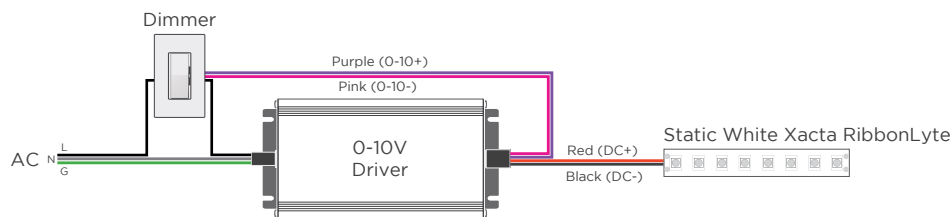

MLV / ELV

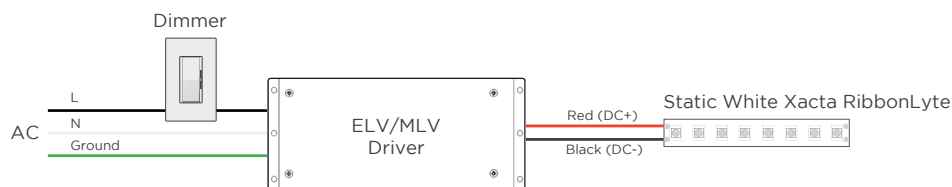

DMX

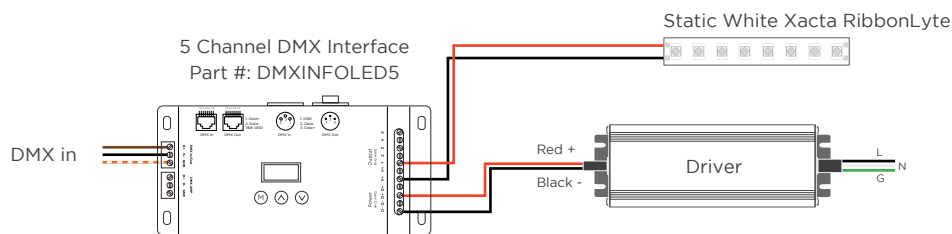

WIRE COLORS PER

STATIC WHITE
Red Wire (+) Positive
Black Wire (-) Negative

REV.14.JUL.2025

GLOBAL HQ

320 Murray Hill Pkwy
East Rutherford, NJ 07073
T: (+1) 212 629 6830
E: Sales-US@GENLEDBrands.com

EUROPEAN HQ

Hogeweyselaan 119
1382 JK Weesp
Netherlands
T: (+31) 346 235 000
E: SalesEurope@GENLEDBrands.com

MEINA HQ

PO Box 371378, #823, Building 4EA
Dubai Airport Free Zone, Dubai, UAE
T: (+971) 4 701 7901
E: SalesMEINA@genlebrands.com

ASIA-PACIFIC HQ

Room 402, Building D
Shensi Tongchuang Science and Technology Park
No. 16 Hongyin Road
Xingqiang Community, Xinhua Street
Guangming District, Shenzhen, China 518107
T: (+86) 755 8529 0710
E: Sales-Pacific@GENLEDBrands.com