

Light efficiency:

58 Lumen/Watt

Light quality:

CRI: 92.4

Color temperature:


1779 K

Output: 202 lm

Peak: 33.5 cd

Power: 3.5 W

PF: 1.0

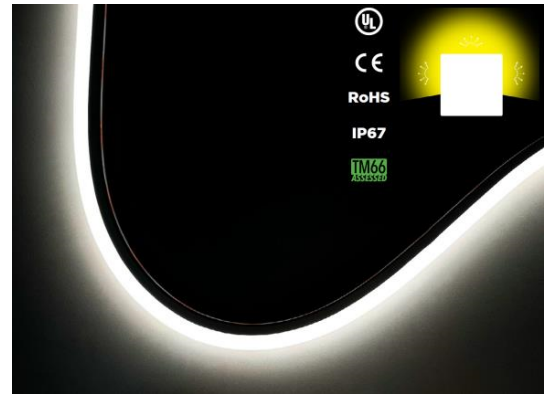

Tracking number: [n/a](#)


Product name:  
**NLA3D4.4VWE, 1800K**

Item number:

Date and time:  
**8/8/2025 1:53:46 PM**

Operator:  
**MW**


Description:  
**color:white 1800K+3000K,  
Power:14.4w/m,voltage:24V,length:  
0.5m, 1800K ONLY**

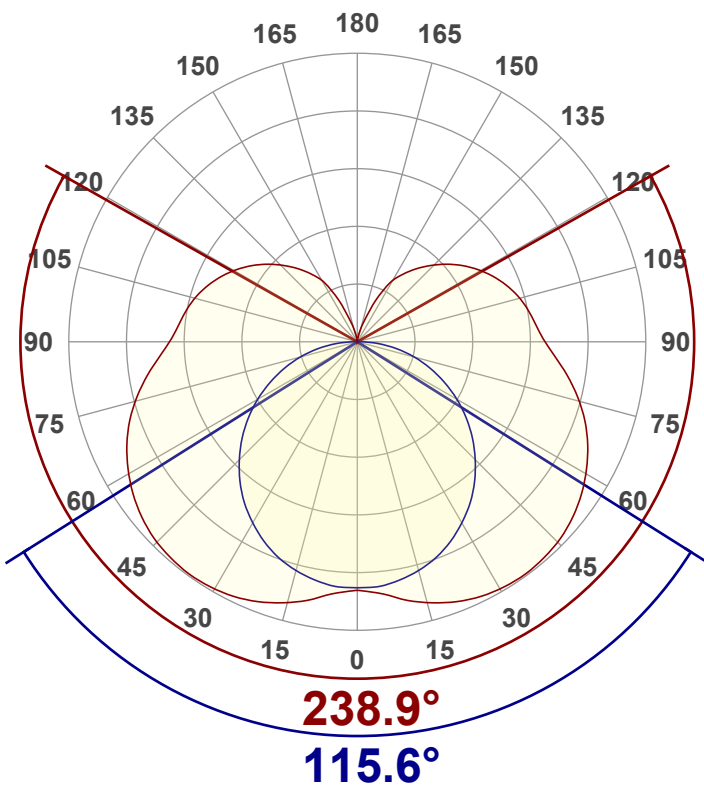

CIE 1931  
x: 0.548  
y: 0.402



Spectra: Peak wavelength :639

Dominant wavelength :592

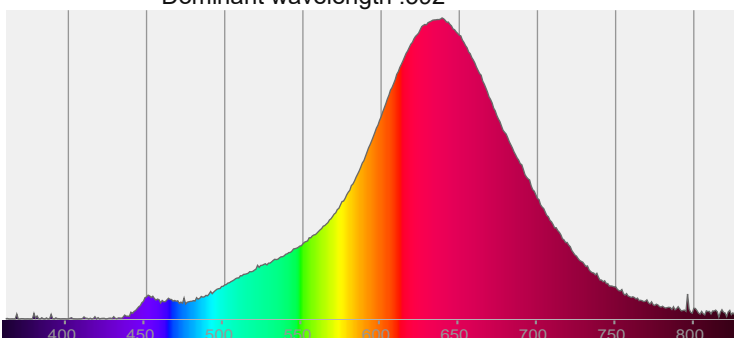


Power


Voltage: 24.0 V  
Current: 0.146 A  
Frequency: 0 Hz

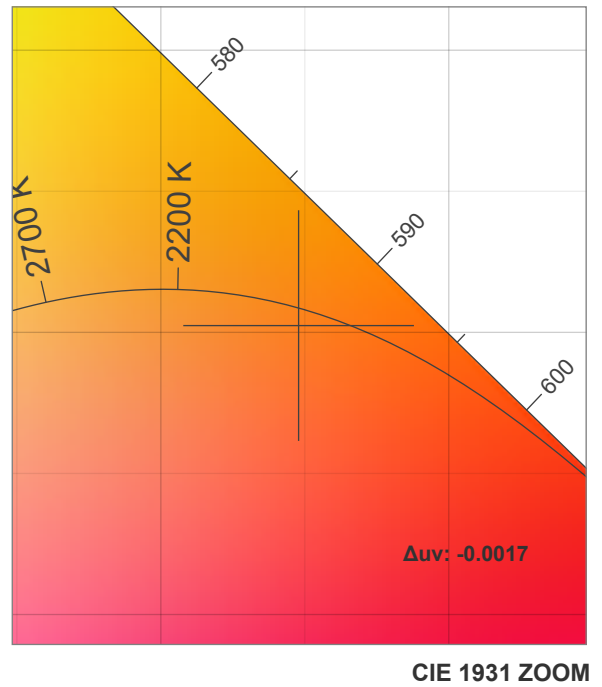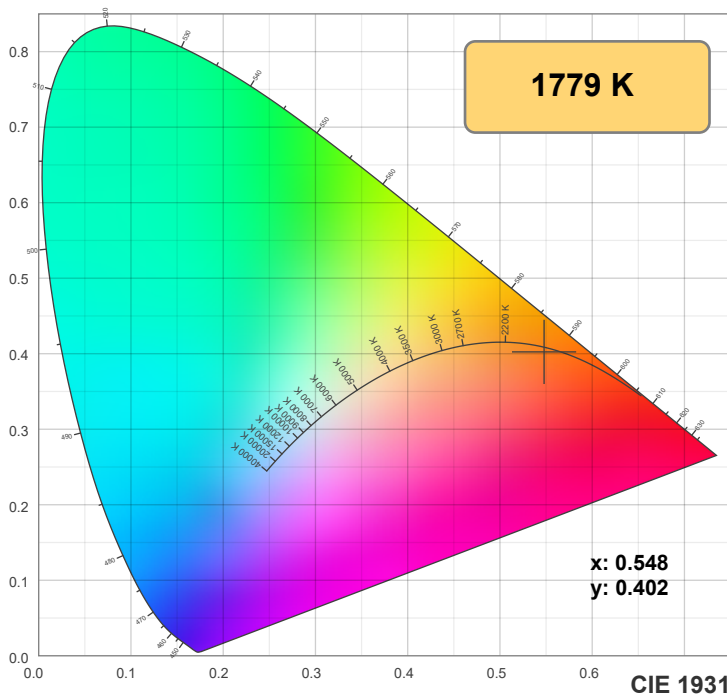

**TM-30: 90.5**

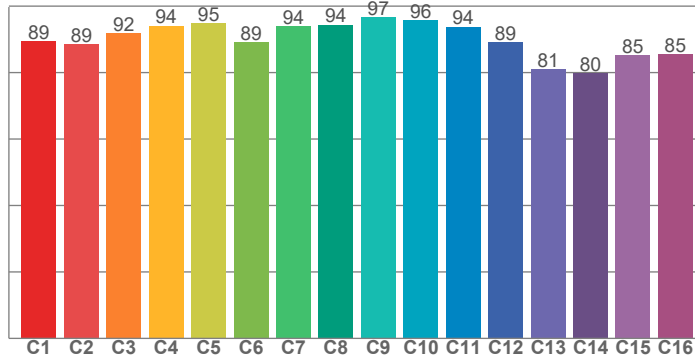

**CRI: 92.4 (R1-R8)**

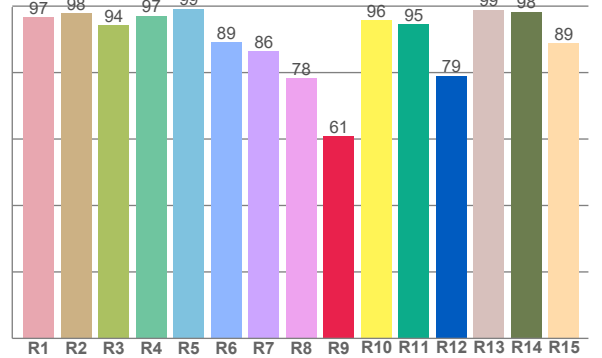

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
96.6	97.8	94.4	97.1	99.2	89.1	86.5	78.3	60.9	95.7	94.6	79.1	98.9	98.3	88.9


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
89.5	88.6	91.8	94.1	94.9	89.0	93.9	94.4	96.7	95.7	93.8	89.2	81.0	79.7	85.1	85.5

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
70.2	73.5	78.4	77.7	77.7	78.1	74.2	71.2	73.3	77.5	75.2	72.3	70.1	67.5	71.0

**CQS: 72.8**

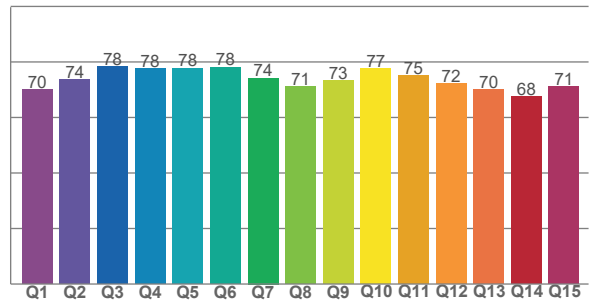

## Color parameters

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
1779 K	92.4	60.9	90.5	101.2	72.8	0.548	0.402	0.325	0.359	-0.0017







**Rf 90.5**


Fidelity index Rf

**Rg 101.2**

Gamut index Rg

Hue Bin	R <sub>f</sub>	Shifts (%)	
		Chroma	Hue
1	89	-5%	2%
2	89	-3%	6%
3	92	3%	4%
4	94	3%	2%
5	95	4%	1%
6	89	5%	1%
7	94	1%	-4%
8	94	1%	-1%
9	97	1%	1%
10	96	2%	1%
11	94	4%	1%
12	89	6%	-5%
13	81	3%	-17%
14	80	-2%	-23%
15	85	-4%	-11%
16	85	-7%	-7%

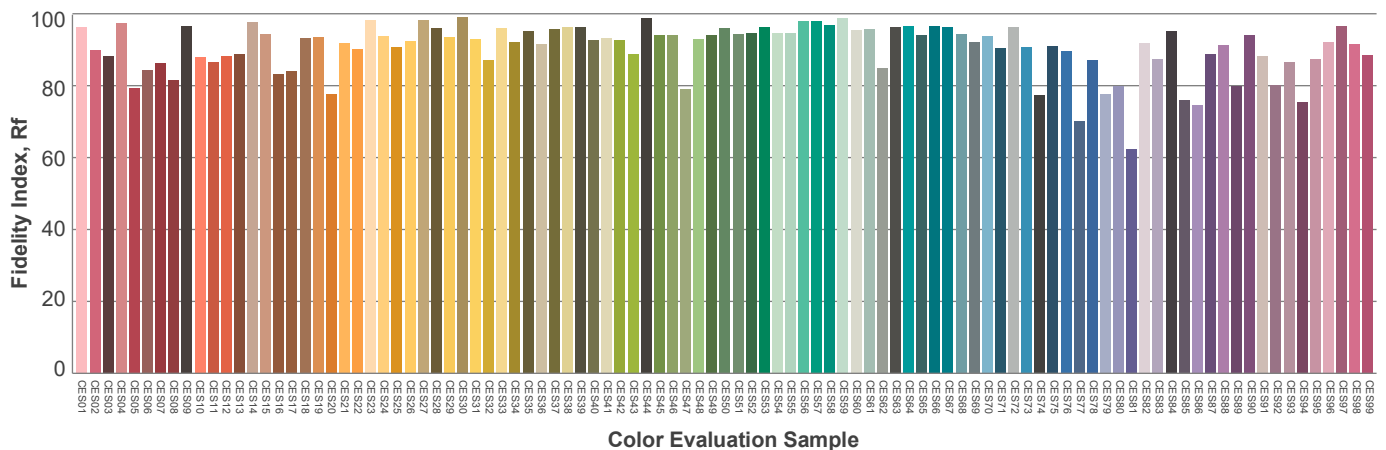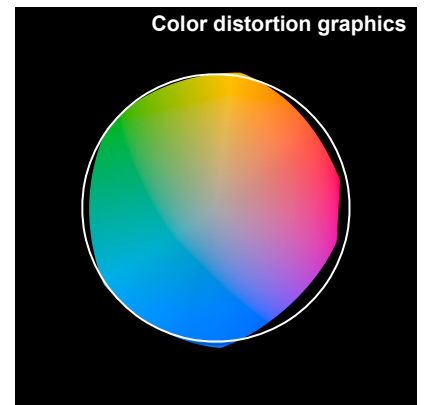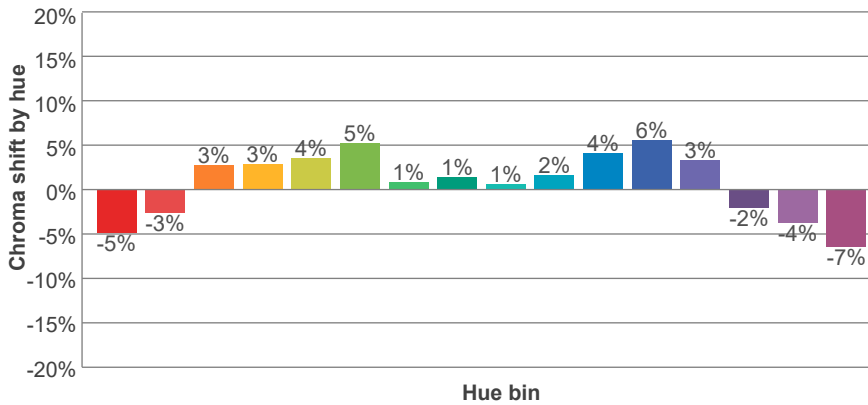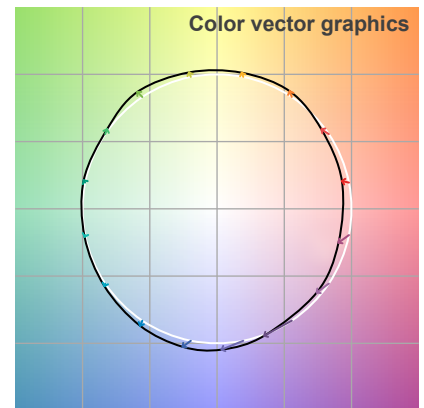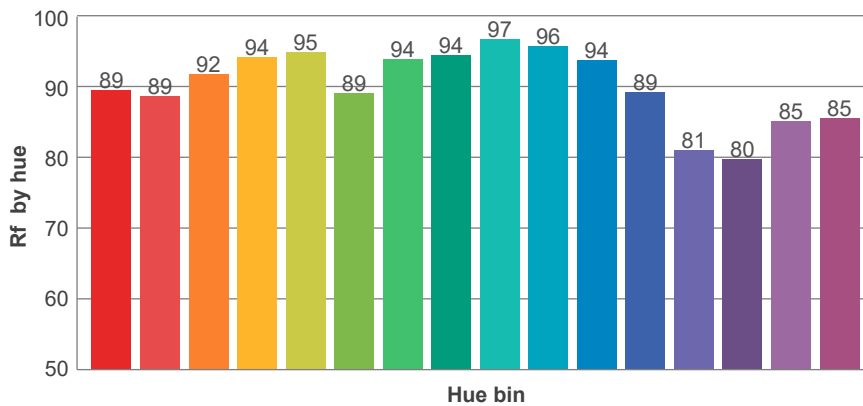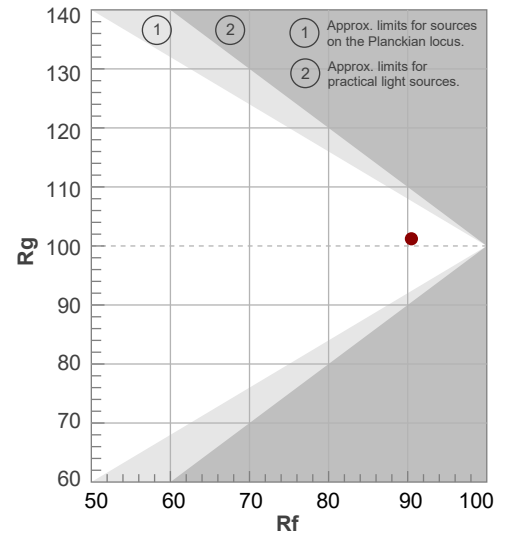

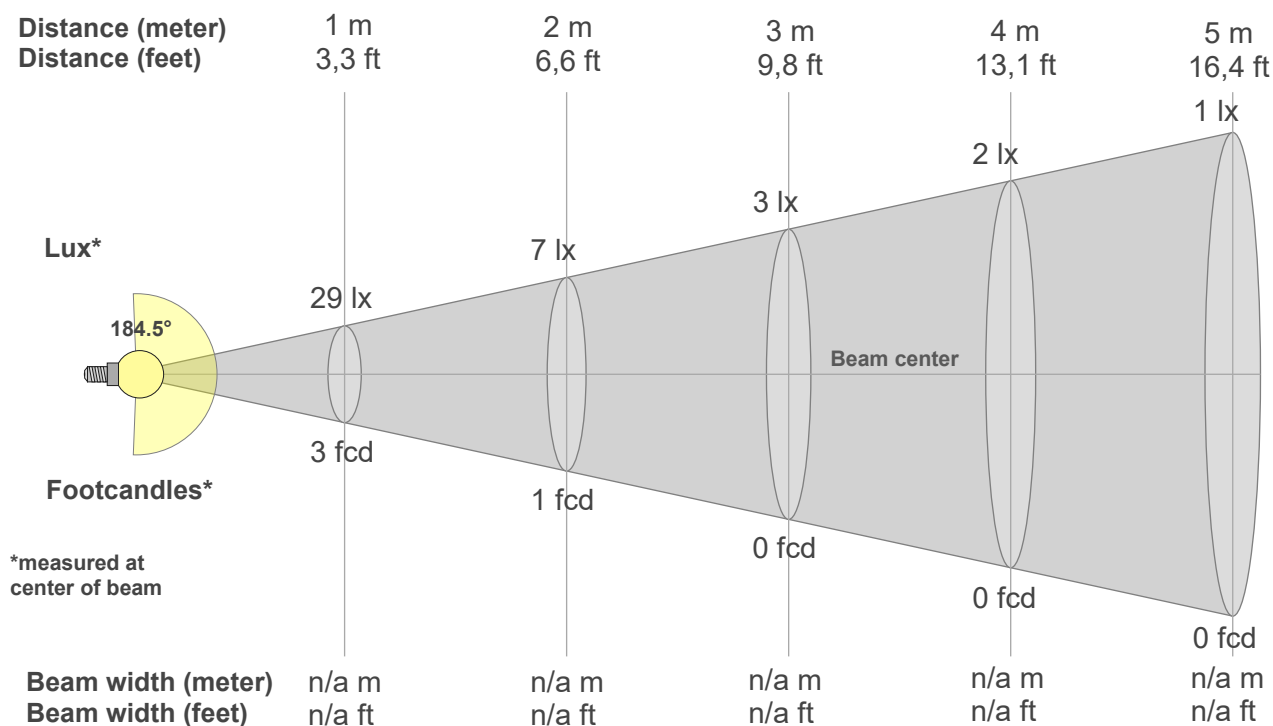

### Beam intensities from 1-20m

[illegible]

### Intensities in 0° c-plane

0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
28.8	30.3	32.0	33.1	33.5	33.0	31.9	30.1	27.8	24.8	21.9	20.5	19.1	17.3	15.1	12.7	10.1	6.8	2.5	0.5
100%	105%	111%	115%	116%	115%	111%	105%	96%	86%	76%	71%	66%	60%	53%	44%	35%	24%	9%	2%

### Intensities in 90° c-plane

[illegible]

### Intensities in 180° c-plane


0°	9°	18°	27°	36°	45°	54°	63°	72°	81°	90°	99°	108°	117°	126°	135°	144°	153°	162°	171°
28.8	30.3	32.0	33.1	33.5	33.0	31.9	30.1	27.8	24.8	21.9	20.5	19.1	17.3	15.1	12.7	10.1	6.8	2.5	0.5
100%	105%	111%	115%	116%	115%	111%	105%	96%	86%	76%	71%	66%	60%	53%	44%	35%	24%	9%	2%

### Intensities in 270° c-plane

[illegible]

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
184.5°	281.8°	303.9°	43.3%	26.7%

**iso-candela diagram**

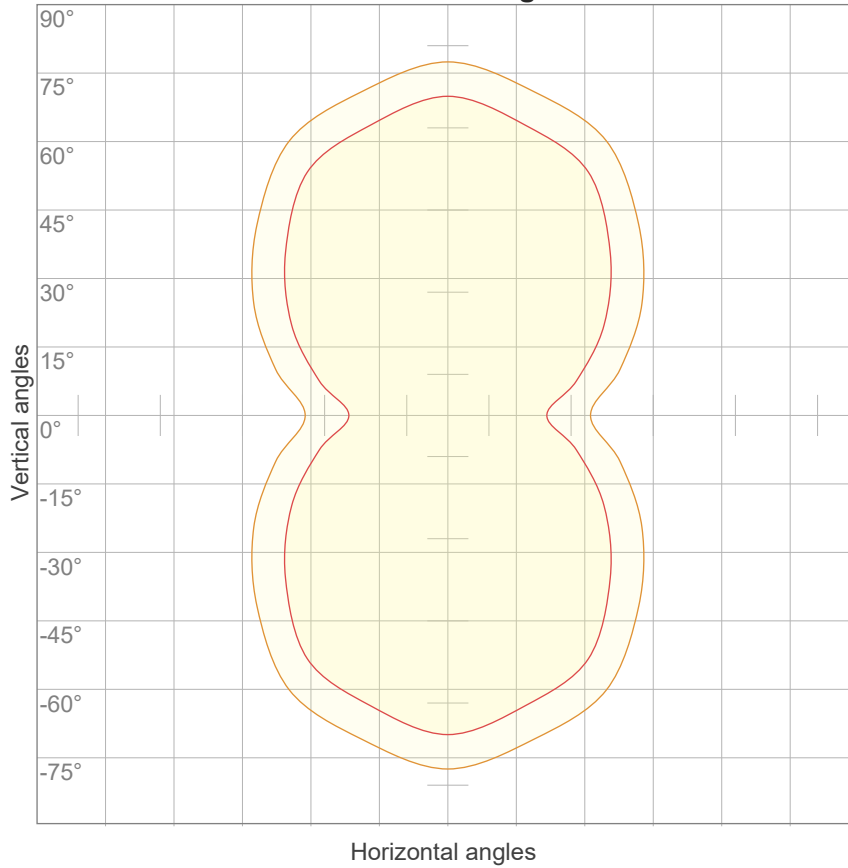


10%	3 cd
20%	6 cd
30%	9 cd
40%	12 cd
50%	14 cd
60%	17 cd
70%	20 cd
80%	23 cd
90%	26 cd

Conditions:

Number of c-planes: 12

Candela at center: 29 cd

**iso-lux diagram**

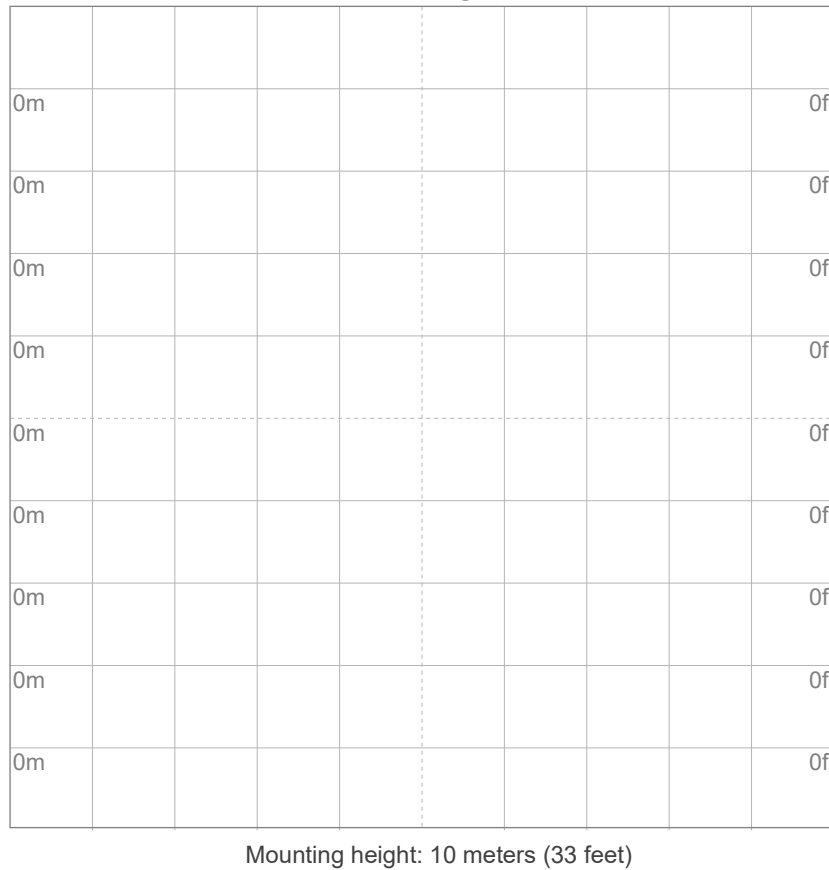

3%	8.64m lx
5%	14.4m lx
10%	28.8m lx
30%	86.4m lx
50%	0.144 lx

Conditions:

Number of c-planes: 12

Lux at center: 0.288 lx

*Lux distribution on a surface  
when lamp is mounted at 10  
meters from the surface.*

**Glare evaluation according to UGR**


p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size X      Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	14.9	16.0	15.6	16.7	17.5	13.6	14.7	14.3	15.4	16.2
	3H	17.1	18.2	17.9	18.9	19.7	15.3	16.4	16.0	17.1	17.8
	4H	18.3	19.3	19.0	20.0	20.8	16.0	17.1	16.8	17.8	18.6
	6H	19.4	20.3	20.1	21.0	21.9	16.7	17.6	17.4	18.3	19.2
	8H	19.9	20.9	20.6	21.6	22.4	16.9	17.9	17.6	18.6	19.4
	12H	20.4	21.4	21.2	22.1	23.0	17.1	18.1	17.8	18.7	19.6
4H	2H	15.5	16.5	16.3	17.2	18.0	14.6	15.6	15.3	16.3	17.1
	3H	18.0	19.0	18.8	19.7	20.5	16.5	17.5	17.3	18.2	19.0
	4H	19.3	20.4	20.0	20.9	21.8	17.4	18.5	18.2	19.0	20.0
	6H	20.5	21.3	21.3	22.1	22.9	18.2	19.0	19.0	19.7	20.5
	8H	21.2	21.8	22.0	22.6	23.5	18.5	19.2	19.3	19.9	20.8
	12H	21.8	22.4	22.6	23.2	24.1	18.7	19.3	19.5	20.1	21.0
8H	4H	19.6	20.3	20.4	21.1	21.9	18.1	18.7	18.9	19.5	20.4
	6H	21.2	21.7	22.0	22.5	23.5	19.1	19.7	19.9	20.5	21.5
	8H	21.9	22.4	22.8	23.3	24.3	19.6	20.1	20.4	21.0	22.0
	12H	22.7	23.1	23.6	24.0	24.9	20.0	20.4	20.9	21.3	22.2
12H	4H	19.6	20.2	20.4	21.0	21.9	18.2	18.8	19.0	19.6	20.5
	6H	21.3	21.7	22.1	22.6	23.6	19.4	19.9	20.2	20.8	21.8
	8H	22.1	22.5	23.0	23.4	24.3	20.0	20.4	20.8	21.2	22.2
Variation of the observer position for the luminaire distance S											
S = 1.0H		0.1 / 0.0					0.1 / -0.1				
S = 1.5H		0.1 / -0.1					0.1 / -0.2				
S = 2.0H		0.2 / -0.1					0.2 / -0.4				
CIE 117-1995. Corrected glare indices referring to 202 lm total luminous flux											

## Coefficients of Utilization

Ceiling reflectance	80				70				50			30			10			0
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR	(RCR: Room Cavity Ratio) Room Values are expressed as percentage of Lumens delivered to the task surface																	
0	112	112	112	112	107	107	107	107	96	96	96	86	86	86	76	76	76	72
1	99	93	87	82	93	88	83	78	78	74	71	69	66	63	61	59	57	53
2	88	79	71	64	83	74	67	61	66	60	55	59	54	50	52	48	45	41
3	80	68	59	51	75	64	56	49	57	50	45	51	45	40	45	40	36	33
4	72	59	50	42	68	56	47	41	50	43	37	44	38	34	39	34	30	27
5	66	52	43	36	62	50	41	34	44	37	31	39	33	28	35	30	26	23
6	61	47	37	31	57	44	36	29	40	32	27	35	29	24	31	26	22	19
7	56	42	33	26	53	40	31	25	36	29	23	32	26	21	28	23	19	17
8	52	38	29	23	49	36	28	22	32	25	21	29	23	19	26	21	17	15
9	48	35	26	21	45	33	25	20	30	23	18	27	21	17	24	19	15	13
10	45	32	24	18	42	30	23	18	27	21	16	25	19	15	22	17	14	12

LAMPS (number of lamps)

## Luminaire budgetary diagram

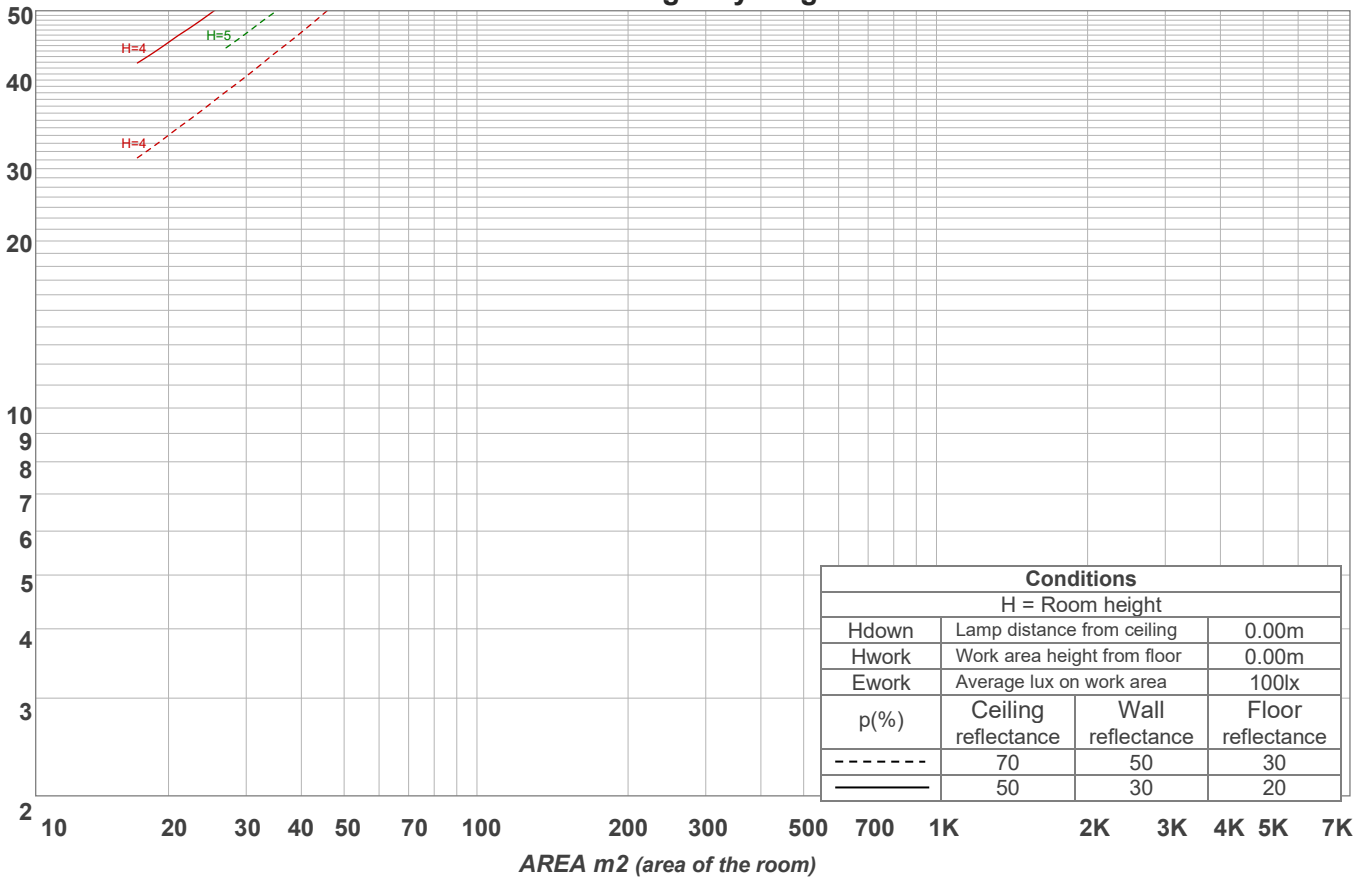


## Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
2.80 lm	8.49 lm	13.9 lm	18.3 lm	21.4 lm	22.6 lm	22.1 lm	19.9 lm	16.5 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
14.0 lm	12.6 lm	10.7 lm	8.38 lm	5.81 lm	3.33 lm	1.28 lm	0.251 lm	0.018 lm

LCS table

BUG rating:	B0 U2 G0	
Forward light	Lumens	Lumens %
Low(0-30):	12.6	6.2%
Medium(30-60):	31.2	15.4%
High(60-80):	21	10.4%
Very high(80-90):	8.2	4.1%
Back light		
Low(0-30):	12.6	6.2%
Medium(30-60):	31.2	15.4%
High(60-80):	21	10.4%
Very high(80-90):	8.2	4.1%
Uplight		
Low(90-100):	14	6.9%
High(100-180):	42.3	20.9%

LCS graph

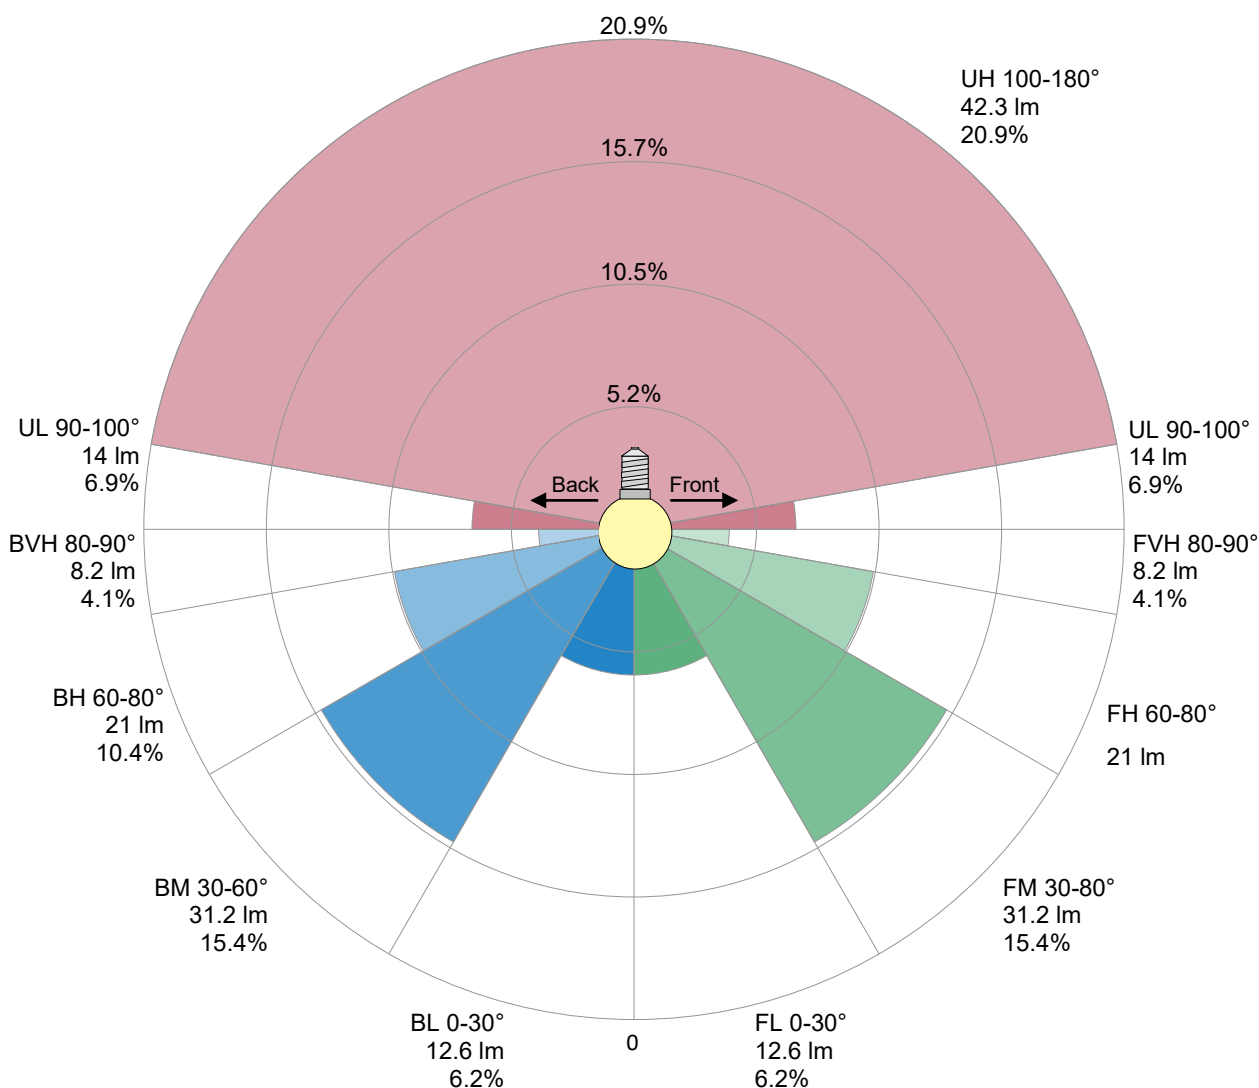





**Flicker curve (complete sampled flicker signal)**



**Flicker frame (frame of one flicker period)**

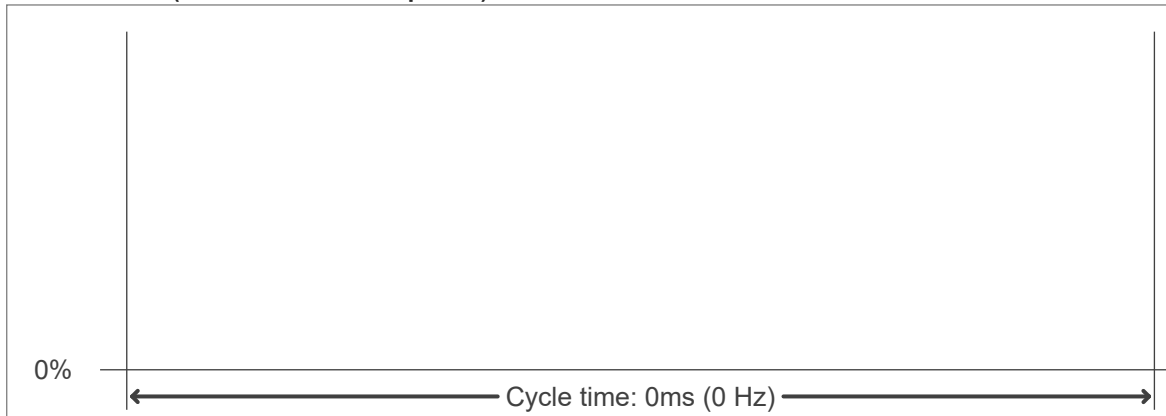

**Flicker FFT (frequency scope of flicker curve)**

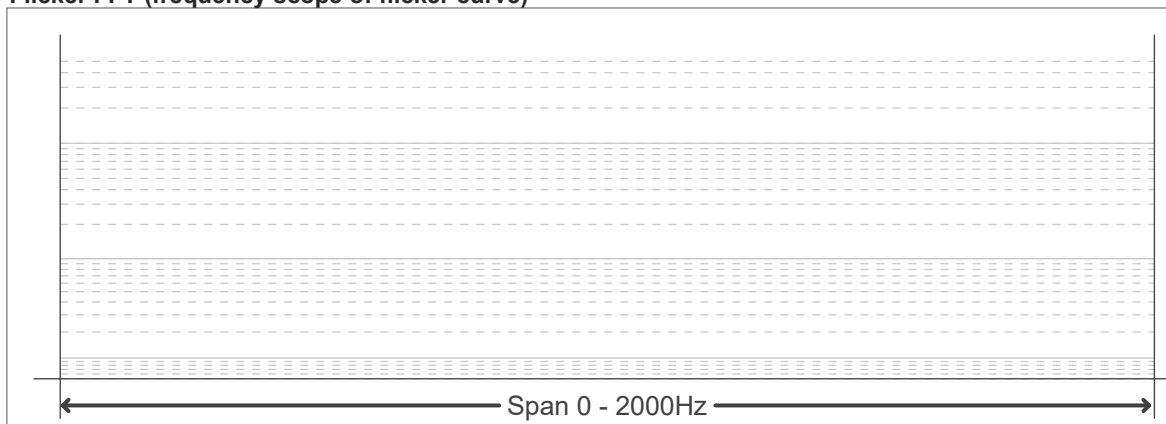

**Flicker results:**

Flicker frequency:		n/a Hz	
Flicker index:	n/a	JA8/10 40Hz	n/a %
Flicker percentage:	n/a %	JA8/10 90Hz	n/a %
SVM: (Visual flicker)	n/a	JA8/10 200Hz	n/a %
PstLM	n/a	JA8/10 400Hz	n/a %
Mp	n/a	JA8/10 1000Hz	n/a %

**Flicker conditions:**

Sample rate:	n/a samples/second
--------------	--------------------